

3 - Inductive proximity sensors

OsiSense XS

Selection guide page 3/2

- General page 3/12
- Flush mountability using teach mode:
Simplicity through innovation page 3/22

OsiSense XS, general purpose

- Cylindrical type
 - Standard range, flush mountable page 3/24
 - Increased range, flush mountable page 3/34
 - Increased range, non flush mountable page 3/42
- Flat format pages 3/44 to 3/72
- Cubic type page 3/48
- Plastic type pages 3/50 to 3/60
- Multivoltage sensor, cylindrical with short-circuit protection page 3/52
 - Solid-state PNP or NPN, NO + NC outputs page 3/56
 - Solid-state PNP + NPN, NO or NC programmable outputs page 3/58
- Basic sensors, flush and non flush mountable page 3/62
- Quasi flush mountable sensors, increased range page 3/66
- Miniature sensors page 3/68

OsiSense XS Application

- Adjustable range sensors page 3/70
- Sensors for rotation monitoring page 3/76
- Sensors with analogue output page 3/78
- Sensors for food/beverage and pharmaceutical applications
 - Cylindrical, stainless steel page 3/88
 - Cylindrical, plastic page 3/92
 - Cylindrical, stainless steel, for harsh industrial environments page 3/96
- Sensors for assembly, packaging and light material handling applications
 - 12 x 26 x 40 mm format page 3/98
 - 80 x 80 x 40 mm format page 3/104
- Sensors for welding machine applications page 3/106
- Selective detection of ferrous and non ferrous materials page 3/108

OsiSense XS

- Accessories page 3/112
- Detection curves page 3/120
- Substitution table page 3/120

Cylindrical type

Standard range

Flush mountable

Sensing distance S_n (mm)

Diameter

Short case

Supply

3-wire $\cdots$ (PNP/NPN)2-wire $\cdots$

Long case

Supply

3-wire $\cdots$ (PNP/NPN)2-wire $\cdots$ 2-wire $\sim$

Function

NO

NC

Connection

Pre-cabled (L = 2 m) (1)

M8 connector, 3-pin (3-wire $\cdots$)

M12 connector

1/2"-20UNF connector

Remote connector

Degree of protection

Special

- 40 °C, + 70 °C

temperatures

- 25 °C, + 85 °C

Type reference

Pages

1.5

Ø 6.5 plain and M8

2

M12

5

M18

10

M30

Page 3/24

Page 3/28

Page 3/25

Page 3/29

–

Page 3/32

•

•

•

•

•

•

•

•

•

•

•

•

•

–

–

–

•

•

•

•

–

•

•

•

Remote connectors available:

M8, M12, M18, screw terminal, 7/8", DIN: please consult our Customer Care Centre

IP 65 and IP 67, IP 68 for pre-cabled version, IP 69K for diameters 12 to 30

Add the suffix TF to the end of the reference (2)

Add the suffix TT to the end of the reference (2)

XS506

XS508

XS512

XS518

XS530

3/24 to 3/33

(1) Also available in lengths of 5 and 10 m, depending on model

(2) Product availability depending on model: please consult our Customer Care Centre.

Increased range

Flush mountable



Non flush mountable



2.5	4	8	15	7	8	12	16	22	30
Ø 6.5 plain and M8	M12	M18	M30	M12		M18		M30	
Pages 3/34 and 3/35				–	Page 3/34	–	Page 3/34	–	–
Page 3/38				–	–	–	–	–	–
Page 3/36				Page 3/40	–	Page 3/40	–	–	Page 3/40
Page 3/38				–	–	–	–	–	–
–	Page 3/40			–	–	Page 3/42	–	Page 3/42	–
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	–	–	–	–	–	–	–	–	–
•	•	•	•	•	•	•	•	•	•
–	•	•	•	–	–	•	–	•	–
Remote connectors available: M8, M12, M18, screw terminal, 7/8", DIN: please consult our Customer Care Centre									
IP 65 and IP 67, IP 68 for pre-cabled version, IP 69K for diameters 12 to 30					IP 65 and IP 67, IP 68 for pre-cabled version, IP 69K				
Add the suffix TF to the end of the reference (2)									
Add the suffix TT to the end of the reference (2)									
XS106 XS606	XS108 XS608	XS112, XS612	XS118, XS618	XS130, XS630	XS612	XS212	XS618	XS218	XS630
3/34 to 3/41					3/40 to 3/43				

Block type

Standard range

Flush mountable



3

Sensing distance Sn (mm)		2.5	5	10	15	40
Dimensions (W x H x D)		8 x 22 x 8	15 x 32 x 8	26 x 26 x 13	40 x 40 x 15	80 x 80 x 26
Supply	3-wire  (PNP/NPN)	3/44	3/44	3/46	3/46	3/46
	2-wire 	3/44	3/44	3/46	3/46	3/46
		—	—	—	—	—
Function	NO					
	NC					
	NO + NC	—	—	—	—	—
	NO/NC	—	—	—	—	—
Connection	Pre-cabled (L = 2 m) (1)					
	M8 connector, 3-pin (3-wire )		—	—		—
	M12 connector		—	—	—	
	1/2"-20UNF connector		—	—	—	—
	Screw terminals		—	—	—	—
	Remote connector	M8			—	—
		M12	—	—		—
		1/2"-20 UNF	—	—	—	—
	Other remote connectors available		M18, screw terminal, 7/8", DIN: please consult our Customer Care Centre			
Degree of protection		IP 67		IP 67, double insulation  or IP 68, double insulation  , depending on model		
Special temperatures	- 40 °C, + 70 °C	Add the suffix TF to the end of the reference (2)				
	- 25 °C, + 85 °C	Add the suffix TT to the end of the reference (2)				
Type reference		XS7J	XS7F	XS7E	XS7C	XS7D
Pages		3/44		3/46		

(1) Also available in lengths of 5 and 10 m, depending on model.

(2) Product availability depending on model: please consult our Customer Care Centre.

Standard and increased ranges

Flush mountable



Non flush mountable



15	20	40
40 x 40 x 70 and 40 x 40 x 117		
Pages 3/48 and 3/50		
Pages 3/48 and 3/50		
Pages 3/48 and 3/50		
•	•	•
•	•	•
—	•	•
•	•	•
—	—	—
—	—	—
•	•	•
•	•	•
•	•	•
—	—	—
—	—	—
—	—	—
—	—	—
IP 65, IP 67 and IP 69K		
Add the suffix TF to the end of the reference (2)		
Add the suffix TT to the end of the reference (2)		
XS7C2, XS7C4, XS8C2 and XS8C4		
3/48 and 3/50		

3

Sensor type: flush and non flush mountable		Multivoltage sensors	Sensors with 2 complementary outputs	
		With short-circuit protection	Solid-state PNP or NPN NO + NC outputs	Solid-state PNP + NPN, NO or NC programmable outputs
				
Sensing distance S_n (mm)	Flush mountable	2 ... 10	1.5 ... 15	2 ... 10
	Non flush mountable	4 ... 15	2.5 ... 15	4 ... 15
Diameter		Threaded: M12, M18, M30	Plain: Ø 6.5 Threaded: M8, M12, M18, M30	Threaded: M12, M18, M30
Case material		Nickel plated brass	Nickel plated brass or stainless steel or plastic	Nickel plated brass or plastic
Supply	DC	—	•	•
	AC	—	—	—
	AC/DC	•	—	—
Function	NO	•	—	—
	NC	•	—	—
	NO + NC	—	•	—
	NO/NC	—	—	• programmable
Connection	Pre-cabled (L = 2 m) (1)	•	•	•
	M8 connector, 3-pin (3-wire ---)	—	—	—
	M12 connector	—	•	•
	1/2"-20UNF connector	•	—	—
	Remote connector	Remote connectors available: M8, M12, M18, screw terminal, 7/8", DIN: please consult our Customer Care Centre		
Degree of protection		IP 67, IP 68 or IP 69K depending on model		
Special temperatures	- 40 °C, + 70 °C	Add the suffix TF to the end of the reference (2)		
	- 25 °C, + 85 °C	Add the suffix TT to the end of the reference (2)		
Type reference		XS1M XS2M	XS1●●●C410 XS4P●●●C410 XS1●●B3PC●	XS1M●●KP340 XS2M●●KP340 XS4P●●KP340
Pages		2/52	3/54	3/58

(1) Also available in lengths of 5 and 10 m, depending on model.

(2) Product availability depending on model: please consult our Customer Care Centre.

(3) Packed and sold in lots of 20

Plastic case sensors	Basic sensors	Almost flush mountable sensors	Miniature sensors
For chemical processing, marine applications	For repetitive machines		For robotic, transfer machine, assembly line applications



–	1.5 ... 10	2.5 ... 15	–	1
2.5 ... 15	2.5 ... 15	–	2.5 ... 20	–
Threaded: M8, M12, M18, M30	Threaded: M8, M12, M18, M30	Plain: Ø 6.5 Threaded: M8, M12, M18, M30		Plain: Ø 4 Threaded: M5
Plastic	Nickel plated brass or plastic	Nickel plated brass		Nickel plated brass or stainless steel
•	•	•	•	•
–	–	–	–	–
•	–	–	–	–
–	•	•	•	•
•	•	•	•	•
–	–	–	–	–
–	–	–	–	–
•	•	•	•	•
–	•	•	•	•
–	•	•	•	•
•	–	–	–	–
Remote connectors available: M8, M12, M18, screw terminal, 7/8", DIN: please consult our Customer Care Centre				
IP 67 or IP 68 depending on model	IP 67		IP 67 or IP 68	IP 67
Add the suffix TF to the end of the reference (2)				
Add the suffix TT to the end of the reference (2)				
XS4P	XS1●●BL● XS2●●BL●	XS1●●B3●●●TQ (3)	XS1N●●349	XS1L XS2L XS1N
3/60	3/62 and 3/63	3/34 and 3/35	3/66	3/68

Conveying

Sensor type: flush and non flush mountable

Adjustable range sensors

Developed in accordance with the needs expressed by our customers, these sensors provide a complete solution for specific application functions: rotation monitoring, selective detection, analogue control, etc.




Sensing dist. Sn (mm)	Flush mountable	3...11 (1)	15	25	60
	Non flush mountable	5...18 (1)	—	—	—
Form	Cylindrical	M12 x 54 M18 x 67 M30 x 71	—	—	—
	Block (W x H x D) dimensions in mm	—	26 x 26 x 13	40 x 40 x15	80 x 80 x 26
Case material		Nickel plated brass	PBT	PBT	PBT
Supply					
		—	—	—	—
		—			
Function	NO				
	NC				
	NO + NC	—	—	—	—
	NO/NC	—	—	—	—
Connection	Pre-cabled (L = 2 m) (2)	—			
	M8 connector, 3-pin (--- 3-wire)	—			—
	M12 connector	—	—	—	
	1/2"-20UNF connector	—	—	—	
	Remote connector				
	Screw terminals	—	—	—	—
Degree of protection		IP 67, double insulation 	IP 67, double insulation  or IP 68, double insulation  , depending on model.		
Special temperatures	- 40 °C, + 70 °C - 25 °C, + 85 °C	Add the suffix TF to the end of the reference (3) Add the suffix TT to the end of the reference (3)			
Type reference		XS612B2 XS618 B2 XS630 B2	XS8E	XS8C	XS8D
Pages		3/70	3/72		

(1) Depending on model.

(2) Also available in lengths of 5 and 10 m, depending on model.

(3) Product availability depending on model: please consult our Customer Care Centre.

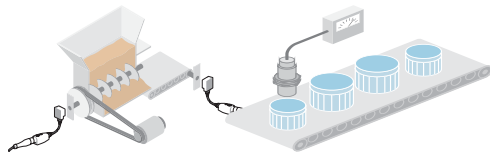


Detection of underspeed, shaft overload

Sensors for rotation monitoring

Position, displacement and deformation control/monitoring

Sensors with analogue output
0 ... 10 V or 4 ... 20 mA



Machine with stainless steel housing

Sensors for food/beverage and pharmaceutical applications

Cylindrical, stainless steel 316 L

Cylindrical, plastic



3



10	10...15 (1)	0.2...10 (1)	5...40 (1)	—	—	6,10 or 20 (1)	—	—
10	10...15 (1)	0.4...15 (1)	5...40 (1)	2...25	2...25	10, 20 or 40 (1)	7...22 (1)	7...22 (1)
M30 x 81	—	Threaded: M12, M18, M30	—	—	—	Threaded: M12, M18, M30	Plain: Ø 18 Threaded: M12, M18, M30	Threaded: M12, M18, M30
—	26 x 26 x 13 40 x 40 x 15	—	32 x 15 x 8 26 x 26 x 13 40 x 40 x 15 80 x 80 x 26	40 x 40 x 70	40 x 40 x 117	—	—	—
Metal	PBT	Metal or plastic	PBT	PBT	PBT	Stainless steel, 316 L	Stainless steel, 316 L	Plastic, PPS
•	•	•	•	•	•	•	•	•
—	—	—	—	—	—	—	—	—
•	•	—	—	—	—	—	•	•
—	—	—	—	—	—	•	•	•
•	•	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—
•	—	•	•	—	—	—	•	•
—	—	—	—	—	—	—	—	—
—	—	—	•	•	—	•	•	•
—	—	—	—	—	—	—	•	•
—	•	—	•	—	—	—	—	—
—	—	—	—	—	•	—	—	—
IP 67	IP 67, double insulation ☐	IP 67	IP 67 or IP 68 (pre-cabled version)	IP 65, IP 67 IP 69K	IP 65, IP 67 IP 69K	IP 68, IP 69K	IP 68 (pre-cabled version), double insulation ☐ IP 69K conforming to DIN 40050	

Add the suffix TF to the end of the reference (3)

Add the suffix TT to the end of the reference (3)

XSAV	XS9•11R	XS1M•••AB1 XS4P••AB1	XS9••••A	XS9C2	XS9C4	XS9••S•	XS2••SA	XS2••AA
3/75	3/77	3/79	3/83 and 3/85	3/86	3/86	3/88	3/90 and 3/92	3/94 and 3/96

Applications



Conveying

Sensor type: flush and non flush mountable

Sensors for conveying and material handling applications

Cylindrical,
stainless steel 303

12 x 40 x 26
format

80 x 80 x 40
format,
increased range



Developed in accordance with the needs expressed by our customers, these sensors provide a complete solution for specific application functions: rotation monitoring, selective detection, analogue control, etc.


Sensing dist.	Flush mountable
Sn (mm)	Non flush mountable
Form	Cylindrical
	Block (W x H x D) dimensions in mm
Case material	
Supply	~ ~
Function	NO NC NO + NC NO/NC
Connection	Pre-cabled (L = 2 m) (2) M8 connector, 3-pin (≡ 3-wire) M12 connector 1/2"-20UNF connector Remote connector Screw terminals
Degree of protection	
Special temperatures	- 40 °C, + 70 °C - 25 °C, + 85 °C
Type reference	
Pages	

3, 6, 10 or 20 (1)	2	50
6, 10, 20 or 40 (1)	4	42
Threaded: M8, M12, M18, M30	—	—
—	12 x 40 x 26	80 x 80 x 40
Stainless steel 303	Plastic	Plastic
•	•	•
—	—	—
—	•	—
•	•	•
—	•	—
—	•	—
—	—	—
—	•	—
—	•	—
•	—	•
—	—	—
—	—	—
—	—	—
IP 67 and IP 69K	IP 67	IP 67, double insulation ☐
Add the suffix TF to the end of the reference (3)		
Add the suffix TT to the end of the reference (3)		
XS9••R•	XS7G XS8G	XS7D
3/98	3/100	3/104

(1) Depending on model.

(2) Also available in lengths of 5 and 10 m, depending on model.

(3) Product availability depending on model: please consult our Customer Care Centre.

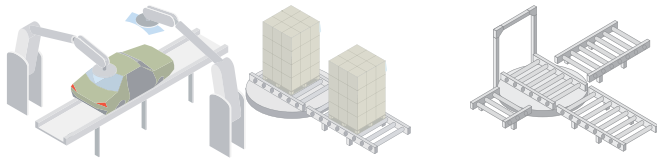

Robotics

Assembly machines, conveyor systems, material handling

Sensors for welding machine applications	Factor 1 (Fe/Nfe) sensors for ferrous and non ferrous materials			Selective detection sensors for ferrous materials only or non ferrous materials only
Cylindrical, stainless steel 303	Cylindrical	Cubic	Rectangular	Cylindrical




3

6 or 10 ⁽¹⁾	5, 10 or 15 ⁽¹⁾	20	20	5
–	–	–	–	–
Threaded: M12, M18	Threaded: M18, M30	–	–	Threaded: M18
–	–	40 x 40 x 70	40 x 40 x 117	–
Stainless steel 303	Metal	PBT	PBT	Metal
●	●	●	●	●
–	–	–	–	–
–	–	–	–	–
●	–	–	–	●
–	–	–	–	–
–	–	●	●	–
–	●	–	–	–
–	●	–	–	●
–	–	–	–	–
●	●	●	–	–
–	–	–	–	–
–	●	–	–	–
–	–	–	●	–
IP 68 and IP 69K	IP 68	IP 65, IP 67 and IP 69K		IP 68
Add the suffix TF to the end of the reference ⁽³⁾				
Add the suffix TT to the end of the reference ⁽³⁾				
XS9●●RW XSLC	XS1M●●●KP	XS9C2	XS9C4	XS1M18PA
3/106 and 3/108	3/110	3/112	3/112	3/114

Standards and certifications

Parameters related to the environment

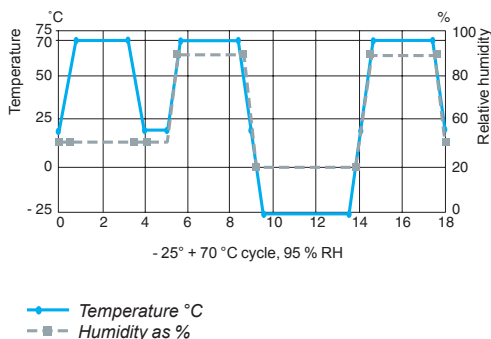

Recommendations

The sensors detailed in this catalogue are designed for use in standard industrial applications relating to presence detection. These sensors do not incorporate the required redundant electrical circuit enabling their usage in safety applications. For safety applications, please refer to our "Safety solutions using Preventa" catalogue.

Quality control

Our inductive proximity sensors are subject to special precautions in order to guarantee their reliability in the most arduous industrial environments.

- **Qualification**
 - The product characteristics stated in this catalogue are subject to a qualification procedure carried out in our laboratories.
 - In particular, the products are subjected to climatic cycle tests for 3000 hours whilst powered-up to verify their ability to maintain their characteristics over time.
- **Production**
 - The electrical characteristics and sensing distances at both ambient temperature and extreme temperatures are 100% checked.
 - Products are randomly selected during the course of production and subjected to monitoring tests relating to all their qualified characteristics.
- **Customer returns**

If, in spite of all these precautions, defective products are returned to us, they are subject to **systematic analysis** and **corrective actions** are implemented to eliminate the risks of the fault recurring.

Conformity to standards

All Telemecanique Sensors brand inductive proximity sensors conform to and are tested in accordance with the recommendations of standard IEC 60947-5-2.

Mechanical shock resistance

The sensors are tested in accordance with standard IEC 60068-2-27, 50 gn, duration 11 ms.

Vibration resistance

The sensors are tested in accordance with standard IEC 60068-2-6, amplitude ± 2 mm, $f = 10 \dots 55$ Hz, 25 gn at 55 Hz.

Resistance to the environment

- Please refer to the characteristics pages for the various sensors.
- **IP 67: protection against the effects of immersion.**

Test conforming to IEC 60529: sensor immersed for 30 minutes in 1 m of water. No deterioration in either operating or insulation characteristics is permitted.
- **IP 68: protection against prolonged immersion.**

Sensor immersed for 336 hours in 40 metres of water at 50 °C. No deterioration in either operating or insulation characteristics is permitted. Telemecanique Sensors with an IP 68 degree of protection are ideal for use in the most arduous conditions, such as machine tools, automatic car washers.
- **IP 69K: protection against the effects of high pressure cleaning.** Adherence to standard DIN 40050 which stipulates that the product must withstand a water jet at a pressure of 90 bar and temperature of +80 °C for 3 minutes. No deterioration in either operating or insulation characteristics is permitted.

Resistance to electromagnetic interference

- **Electrostatic discharges**

$\sim$ and $\curvearrowright$ versions: level 4 immunity (15 kV). **IEC 61000-4-2**
- **Radiated electromagnetic fields (electromagnetic waves)**

$\sim$, $\sim$ and $\curvearrowright$ versions: level 2 (3 V/m) or level 3 (10 V/m) immunity. **IEC 61000-4-3**
- **Fast transients (motor start/stop interference)**

$\sim$ version: level 3 immunity (1 kV). $\sim$ and $\curvearrowright$ versions: level 4 immunity (2 kV) except $\varnothing 8$ mm model (level 2). **IEC 61000-4-4**
- **Impulse voltage**

$\sim$, $\sim$ and $\curvearrowright$ versions: level 3 immunity (2.5 kV) except $\varnothing 8$ mm and smaller models (level 1 kV). **IEC 60947-5-2**

Resistance to chemicals in the environment

- Owing to the very wide range of chemicals encountered in industry, it is very difficult to give general guidelines common to all sensors.
- To ensure lasting efficient operation, it is essential that any chemicals coming into contact with the sensors will not affect their casing and, in doing so, prevent their reliable operation.
- Cylindrical and flat plastic case sensors offer excellent overall resistance to:
 - chemical products such as salts, aliphatic and aromatic oils, petroleum, acids and diluted bases. For alcohols, ketones and phenols, preliminary tests should be made relating to the nature and concentration of the liquid.
 - food and beverage industry products such as animal or vegetable based products (vegetable oils, animal fat, fruit juice, dairy proteins, etc.).


In all cases, the materials selected (see product characteristics) provide satisfactory compatibility in most industrial environments (for further information, please consult our Customer Information Centre).

Insulation


Class 2 devices

Electrical insulation conforming to standards IEC 61140 and NF C 20-030 relating to means of protection against electric shock.

Principle of inductive detection



Composition of an inductive proximity sensor

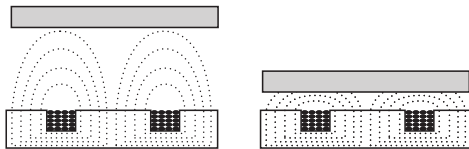

Detection of a metal object

Operating principle

■ An inductive proximity sensor is solely for the detection of metal objects. It basically comprises an oscillator whose windings constitute the sensing face. An alternating magnetic field is generated in front of these windings.

■ When a metal object is placed within the magnetic field generated by the sensor, the resulting currents induced form an additional load and the oscillations cease. This causes the output driver to operate and, depending on the sensor type, a normally open (NO) or normally closed (NC) output signal is produced.

Inductive proximity detection

■ Inductive proximity sensors enable the detection, without physical contact, of metal objects.
 ■ Their range of applications is very extensive and includes:
 □ monitoring the position of machine parts (cams, end stops, etc.),
 □ counting the presence of metal objects, etc.

Advantages of inductive detection

■ No physical contact with the object to be detected, thus avoiding wear and enabling detection of fragile objects, freshly painted objects, etc.
 ■ High operating rates. Fast response.
 ■ Excellent resistance to industrial environments (robust products, fully encapsulated in resin).
 ■ Solid-state technology: no moving parts, therefore service life of sensor not related to number of operating cycles.


Flush mountable using teach mode sensors

■ The flush mountable sensors using teach mode are suitable for all metal environments (flush mountable or non flush mountable) since they ensure a maximum sensing distance, even if there is a metal background. Precise detection of the position of the object can be obtained using the teach mode. For further information, see page 3/22.

LED indicator

	Sortie NO	Sortie NC
 No object present	LED  Output state 	LED  Output state 
 Object present	LED  Output state 	LED  Output state 

Mounting sensors on a metal support

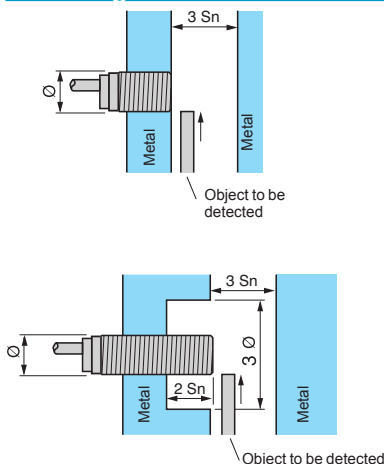

Output LED

All Telemecanique Sensors inductive proximity sensors incorporate an output state LED indicator.

The flush mountable sensors using teach mode are fitted with a green LED that indicates "Power on" and also assists the user during setting-up (teach mode).


Flush mountable in metal

■ No side clearance required.
 ■ All flush mountable sensors using teach mode also enable detection of an object against a metal background. For further information, see pages 3/22 and 3/23.


Sensors not suitable for flush mounting in metal

■ Side clearance required.
 ■ Sensing distance greater than that for a standard flush mountable model.
 ■ Flush mountable sensors using teach mode eliminate the need for side clearance. For further information, see pages 3/22 and 3/23.

Mounting sensors on a metal support

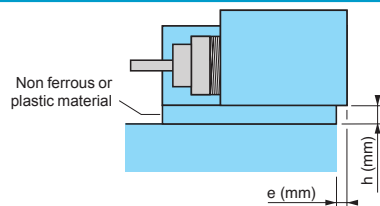

Mounting distance between sensors

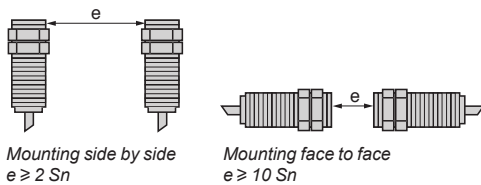

Mounting using fixing clamp

- Standard flush mountable models: $e = 0$, $h = 0$
- Standard non flush mountable models
 - $\varnothing 6.5 / 8 / 12$ mm: $e = 0$, $h = 0$
 - $\varnothing 18$ mm: if $h = 0$, $e \geq 5$; $e = 0$, $h \geq 3$.
 - $\varnothing 30$ mm: if $h = 0$, $e \geq 8$; $e = 0$, $h \geq 4$.
- Flush mountable sensors using teach mode: $e = 0$, $h = 0$


Standard sensors

If 2 standard sensors are mounted too close to each other they are likely to lock in the "detection state" due to interference between their respective oscillating frequencies. To avoid this condition, the minimum mounting distances stated for the sensors should be adhered to or, alternatively, sensors with staggered oscillating frequencies should be used.

Staggered frequency sensors



For applications where the minimum recommended mounting distances for standard sensors cannot be achieved, it is possible to overcome this restraint by using staggered frequency sensors. Please consult our Customer Care Centre. In this case, a staggered frequency sensor is mounted adjacent to or opposite each standard sensor.

Tightening torque for cylindrical type sensors

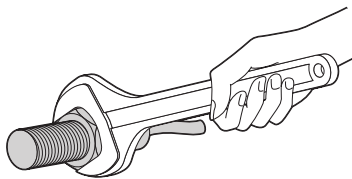


Diameter of sensor (mm)	Maximum tightening torque for the various sensor case materials			
	Brass	Brass	Stainless steel	Plastic
	Short case model	Long case model form A	Long case model form A	All models
	XS5●●B1 XS6●●B3	XS6●●B1 XS6●●B2 XS6●●B4 XSAV●	XS1●● XS2●●	XS4P●●
$\varnothing 5$	1.6 N.m	1.6 N.m	2 N.m	–
$\varnothing 8$	5 N.m	5 N.m	9 N.m	1 N.m
$\varnothing 12$	6 N.m	6 N.m	30 N.m	2 N.m
$\varnothing 18$	15 N.m	15 N.m	50 N.m	5 N.m
$\varnothing 30$	40 N.m	40 N.m	100 N.m	20 N.m



Sensing distance

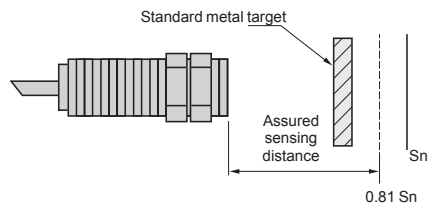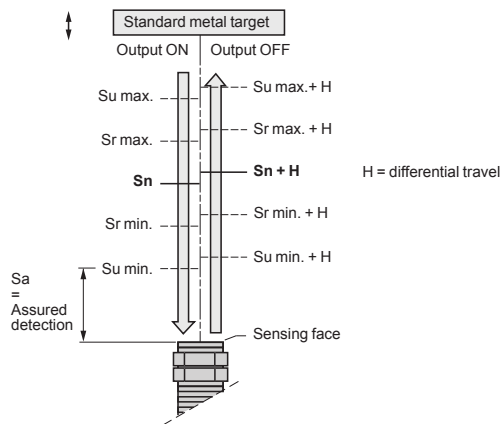

Terminology

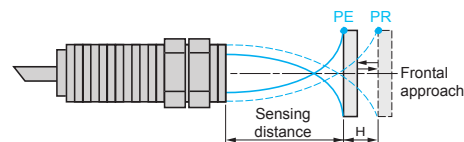

PE = pick-up point, the object is detected
PR = drop-out point, the object is no longer detected

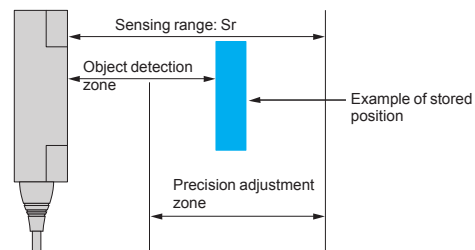

1 Detection threshold curves
2 "Object detected" LED

Definitions

In order to ensure that customers can make reliable product comparisons and selection, the standard IEC 60947-5-2 defines various sensing distances, such as:

- **Nominal sensing distance (Sn)**
The rated operating distance for which the sensor is designed. It does not take into account any variations (manufacturing tolerances, temperature, voltage).
- **Effective sensing distance (Sr)**
The effective sensing distance is measured at the rated voltage (Un) and the rated ambient temperature (Tn). It must be between 90% and 110% of the nominal sensing distance (Sn): $0.9 S_n \leq S_r \leq 1.1 S_n$.
- **Usable sensing distance (Su)**
The usable sensing distance is measured at the limits of the permissible variations in the ambient temperature (Ta) and the supply voltage (Ub). It must be between 90% and 110% of the effective sensing distance: $0.9 S_r \leq S_u \leq 1.1 S_r$.
- **Assured operating distance (Sa)**
This is the operating zone of the sensor. The assured sensing distance is between 0 and 81% of the nominal sensing distance (Sn): $0 \leq S_a \leq 0.9 \times 0.9 \times S_n$.

Standard metal target

The standard IEC 60947-5-2 defines the standard metal target as a square mild steel (Fe 360) plate, 1 mm thick.
The side dimension of the plate is either equal to the diameter of the circle engraved on the sensing face of the sensor or 3 times the nominal sensing distance (Sn).

Differential travel

The differential travel (H), or hysteresis, is the distance between the operating point, as the standard metal target moves towards the sensor, and the release point, as it moves away. This hysteresis is essential for the stable operation of the sensor.

Repeat accuracy

The repeat accuracy (R) is the repeatability of the sensing distance between successive operations. Readings are taken over a period of time whilst the sensor is subjected to voltage and temperature variations: 8 hours, 10 to 30 °C, $U_n \pm 5\%$.
It is expressed as a percentage of the effective sensing distance Sr.
For all OsiSense XS sensors, the repeat accuracy is 3 %.


Detection zone and precision adjustment zone

- Flush mountable sensors using teach mode, due to adjustment of sensitivity whilst teaching, enable the position of an object to be detected as it approaches from the front or side. The teach mode can be used when the object is located in the zone known as the "precision adjustment zone". When the object approaches from the front, the detection zone of the object ranges from the stored position down to zero.


Operating zone

- The operating zone relates to the area in front of the sensing face in which the detection of a metal object is certain. The values stated in the characteristics relating to the various types of sensor are for steel objects of a size equal to the sensing face of the sensor. For objects of a different nature (smaller than the sensing face of the sensor, other metals, etc.), it is necessary to apply a correction coefficient.

Correction coefficients to apply to the assured operating distance

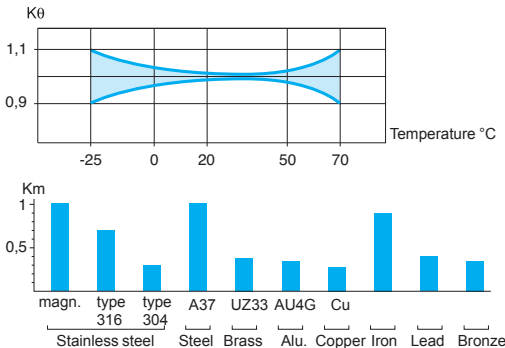

Typical curve for a **copper** object used with a Ø 18 mm cylindrical sensor

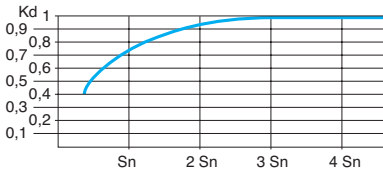

Typical curve for a **steel** object used with a cylindrical sensor

Calculation examples

Assured operating distance of a sensor

In practice, most objects to be detected are generally made of steel and are of a size equal to, or greater, than the sensing face of the sensor.

For the calculation of the assured operating distance for different operating conditions, one must take into account the correction coefficients that influence it.

The curves indicated are purely representative of typical curves. They are only given as a guide to the approximate usable sensing distance of a proximity sensor for a given application.

Influence of ambient temperature

Apply a correction coefficient K_θ , determined from the curve shown opposite.

Material of object to be detected

Apply a correction coefficient K_m , determined from the diagram shown opposite.

The fixed sensing distance models for ferrous/non ferrous (Fe/NFe) materials enable the detection of different objects at a fixed distance, irrespective of the type of the material.

Special case of a very thin object made of a non ferrous material.

Size of object to be detected

Apply a correction coefficient K_d , determined from the curve shown opposite.

When calculating the sensing distance for the selection of a sensor, make the assumption that $K_d = 1$.

Variation of supply voltage

In all cases, apply the correction coefficient $K_t = 0.9$.

Correction of the sensing distance of a sensor

Sensor with nominal sensing distance $S_n = 15$ mm.

Ambient temperature variation 0 to + 20 °C.

Object material and size: steel, 30 x 30 x 1 mm thick.

The assured sensing distance S_a is determined using the formula:

$$S_a = S_n \times K_\theta \times K_m \times K_d \times K_t = 15 \times 0.98 \times 1 \times 0.95 \times 0.9$$

i.e. $S_a = 12.5$ mm.

Selecting a sensor for a given application



Application characteristics:

- object material and size: iron ($K_m = 0.9$), 30 x 30 mm,
- temperature: 0 to 20 °C ($K_\theta = 0.98$),
- object detection distance: 3 mm ± 1.5 mm, i.e. $S_a \text{ max.} = 4.5$ mm,
- assume $K_d = 1$.

A sensor must be selected for which
$$S_n \geq \frac{S_a}{K_\theta \times K_m \times K_d \times K_t} = \frac{4.5}{0.98 \times 0.9 \times 1 \times 0.9}$$

i.e. $S_n \geq 5.7$ mm

Specific aspects of electronic sensors

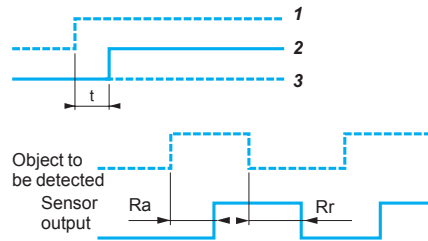

Supply

Terminology

- Residual current (I_r)
 - The residual current (I_r) corresponds to the current flowing through the sensor when in the "open" state.
 - Characteristic of 2-wire type proximity sensors.
- Voltage drop (U_d)
 - The voltage drop (U_d) corresponds to the voltage drop at the sensor's terminals when in the "closed" state (value measured at nominal current rating of sensor).
- First-up delay
 - The first-up delay corresponds to the time (t) between the connection of the power supply to the sensor and its fully operational state.
- 1 Supply voltage U on
- 2 Sensor operational at state 1
- 3 Sensor at state 0
- Response time
 - Response time (R_a): the time delay between the object to be detected entering the sensor's operating zone and the subsequent change of output state. This parameter limits the speed and size of the object.
 - Recovery time (R_r): the time delay between an object to be detected leaving the sensor's operating zone and the subsequent change of output state. This parameter limits the interval between successive objects.

Sensors for AC circuits ($\sim$ and $\curvearrowright$ models)

Check that the voltage limits of the sensor are compatible with the nominal voltage of the AC supply used.

Sensors for DC circuits

- DC source: check that the voltage limits of the sensor and the acceptable level of ripple are compatible with the supply used.
- AC source (comprising transformer, rectifier, smoothing capacitor): the supply voltage must be within the operating limits specified for the sensor.

Where the voltage is derived from a single-phase AC supply, the voltage must be rectified and smoothed to ensure that:

- the peak voltage of the DC supply is lower than the maximum voltage rating of the sensor.
- the minimum voltage of the supply is greater than the minimum voltage rating of the sensor,

given that:

$$\Delta V = (I \times t) / C$$

ΔV = max. ripple: 10 % (V),

I = anticipated load current (mA),

t = period of 1 cycle (10 ms full-wave rectified for a 50 Hz supply frequency),

C = capacitance (μF).


As a general rule, use a transformer with a lower secondary voltage (U_e) than the required DC voltage (U).

Example:

$\sim 18 V$ to obtain $\text{---} 24 V$,

$\sim 36 V$ to obtain $\text{---} 48 V$.




Outputs



Output signal (contact logic)

- Normally open (NO)
 - Corresponds to a sensor whose output changes to the closed state when an object is present in the operating zone.
- Normally closed (NC)
 - Corresponds to a sensor whose output changes to the open state when an object is present in the operating zone.
- Complementary outputs (NO + NC)
 - Corresponds to a sensor with a normally closed output and a normally open output.

Outputs (continued)



2-wire type, non polarised NO or NC output

■ Specific aspects

These sensors are wired in series with the load to be switched.

As a consequence, they are subject to:

- a residual current in the open state (current flowing through the sensor in the "open" state),
- A voltage drop in the closed state (voltage drop across the sensor's terminals in the "closed" state).

■ Advantages

- Only 2 leads to be wired: these sensors can be wired in series in the same way as mechanical limit switches,
- They can be connected to either positive (PNP) or negative (NPN) logic PLC inputs,
- No risk of incorrect connections.

■ Operating precautions

- Check the possible effects of residual current and voltage drop on the actuator or input connected,
- For sensors that do not have overload and short-circuit protection (AC or AC/DC symbol), it is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

3-wire type, NO or NC output, PNP or NPN





■ Specific aspects

These sensors comprise 2 wires for the DC supply and a 3rd wire for the output signal,

- PNP type: switching the positive side to the load,
- NPN type: switching the negative side to the load.

■ Advantages



- Protection against supply reverse polarity,
- Protection against overload and short-circuit,
- No residual current, low voltage drop.



4-wire type, complementary NO and NC outputs, PNP or NPN

■ Advantages


- Protection against supply reverse polarity (+/-).
- Protection against overload and short-circuit.




4-wire type, multifunction, programmable NO or NC output, PNP or NPN

■ Advantages

- Protection against supply reverse polarity (+/-).
- Protection against overload and short-circuit.



2-wire connection



3-wire connection


Specific output signals, analogue type

These sensors convert the approach of a metal object towards the sensing face into an output current variation which is proportional to the distance between the object and the sensing face.

■ Two models available:

- 0...10 V (0...10 mA) output for 3-wire connection,
- 4-20 mA output for 2-wire connection.


Features of the various models

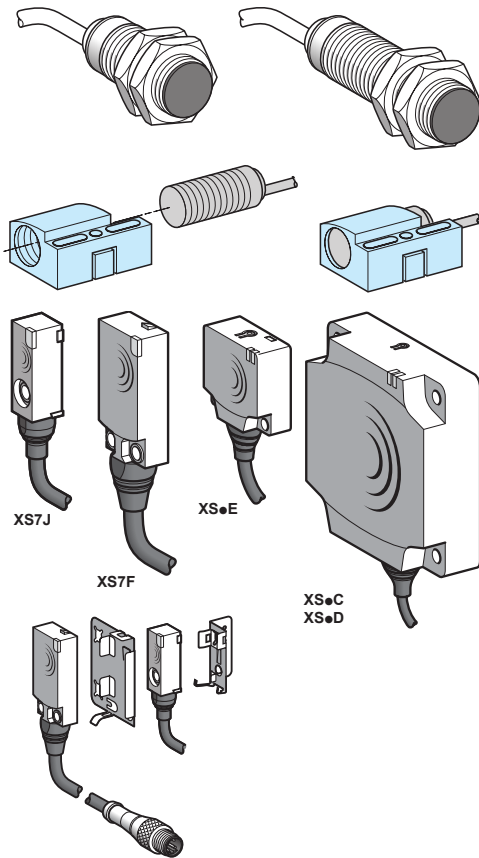

Types of case

- Cylindrical case
 - Fast installation and setting-up.
 - Short case and long case, 2-wire c and 3-wire c versions available.
 - Pre-cabled (moulded cable) and various integral connector (M8, M12, 7/8", M18) and remote connector (on flying lead) versions available.
 - Small size facilitates mounting in locations with restricted access.
 - Interchangeability, provided by indexed fixing clamp: when assembled, becomes similar to a block type sensor.
- Flat case
 - Reduced size (sensor volume divided by 8).
 - Fast installation by mounting on clip-on brackets.
 - Precision detection with the flush mountable sensors using teach mode (see page 3/22).

Electrical connection

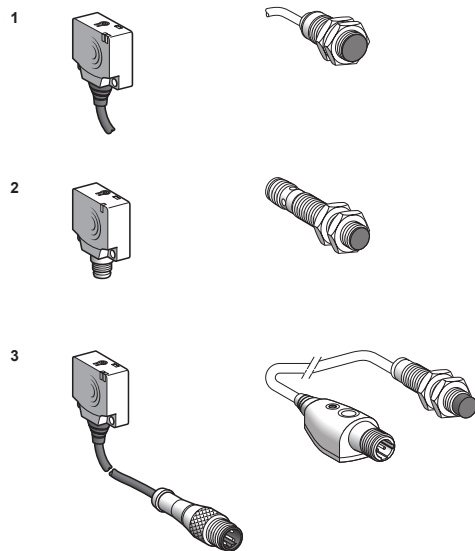


Connection methods

- 1 Pre-cabled:** factory fitted moulded cable, good protection against splashing liquids (IP 68). Example: machine tool.
- 2 Connector:** easy installation and maintenance (IP 67).
- 3 Remote connector:** easy installation and maintenance (IP 68 at sensor level and IP 67 at remote connector level).







Wiring advice

- Length of cable
 - No limitation up to 200 m or up to a line capacitance of < 100 nF (characteristics of sensor remain unaffected).
 - In this case, it is important to take into account the voltage drop on the line.
- Separation of control and power circuit wiring
 - The sensors are immune to electrical interference encountered in normal industrial conditions.
 - Where extreme conditions of electrical "noise" could occur (large motors, spot welders, etc.), it is advisable to protect against transients in the normal way:
 - suppress interference at source,
 - separate power and control wiring from each other,
 - smooth the supply,
 - limit the length of cable.
- Connect the sensor with supply switched off.

Setting-up precautions



3

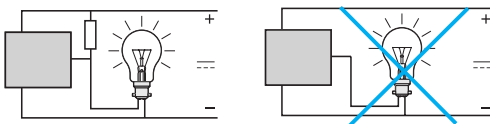

Connection in series

2-wire type sensors

- The following points should be taken into account:
 - Series wiring is only possible using sensors with wide voltage limits.
- Based on the assumption that each sensor has the same residual current value, each sensor, in the open state, will share the supply voltage, i.e.

$$U_{\text{sensor}} = \frac{U_{\text{supply}}}{n_{\text{sensors}}}$$

- U sensor and U supply must remain within the sensor's voltage limits.
- If only one sensor in the circuit is in the open state, it will be supplied at a voltage almost equal to the supply voltage.
- When in the closed state, a small voltage drop is present across each sensor. The resultant loss of voltage at the load will be the sum of the individual voltage drops and therefore, the load voltage should be selected accordingly.

3-wire type sensors

This connection method is not recommended.

- Correct operation of the sensors cannot be assured and, if this method is used, tests should be made before installation.
- The following points should be taken into account:
- Sensor 1 carries the load current in addition to the no-load current consumption values of the other sensors connected in series. For certain models, this connection method is not possible unless a current limiting resistor is used.
- When in the closed state, a small voltage drop is present across each sensor. The load should therefore be selected accordingly.
- As sensor 1 closes, sensor 2 does not operate until a certain time (t) has elapsed (corresponding to the first-up delay) and likewise for the following sensors in the sequence.
- The use of "flywheel" diodes is recommended when an inductive load is being switched.

Sensors and devices in series with an external mechanical contact

2 and 3-wire type sensors

- The following points should be taken into account:
- When the mechanical contact is open, the sensor is not supplied.
- When the contact closes, the sensor does not operate until a certain time (t) has elapsed (corresponding to the first-up delay).

Connection in parallel

2-wire type sensors

This connection method is not recommended.

- Should one of the sensors be in the closed state, the sensor in parallel will be "shorted-out" and no longer supplied.
- As the first sensor passes into the open state, the second sensor will become energised and will be subject to its first-up delay.
- This configuration is only permissible where the sensors will be working alternately.
- This method of connection can lead to irreversible damage of the units.

3-wire type sensors

- No specific restrictions. The use of "flywheel" diodes is recommended when an inductive load (relay) is being switched.

AC supply

- 2-wire type sensors cannot be connected directly to an AC supply.
- This would result in immediate destruction of the sensor and considerable danger to the user.
- An appropriate load (refer to the instruction sheet supplied with the sensor) must always be connected in series with the sensor.

Capacitive load (C > 0.1 μF)

- On power-up, it is necessary to limit (by resistor) the charging current of the capacitive load C.
- The voltage drop in the sensor can also be taken into account by subtracting it from the supply voltage for the calculation of R.

$$R = \frac{U_{\text{supply}}}{I_{\text{max. (sensor)}}$$

Load comprising an incandescent lamp

- If the load comprises an incandescent lamp, the cold state resistance can be 10 times lower than the hot state resistance. This can cause very high current levels on switching. Fit a pre-heat resistor in parallel with the sensor.

$$R = \frac{U^2}{P} \times 10, \quad U = \text{supply voltage and } P = \text{lamp power}$$

Fast trouble shooting guide

Problem	Possible causes	Remedy
The sensor's output will not change state when a metal object enters the detection zone	On a flush mountable sensor using teach mode: setting-up or programming error.	■ After a RESET, follow the environment teach mode procedure. Refer to instruction sheet supplied with sensor.
	Output stage faulty or complete failure of the sensor or the short-circuit protection has tripped.	■ Check that the sensor is compatible with the supply being used. ■ Check the load current characteristics: □ if load current I u maximum switching capacity, an auxiliary relay, of the CAD N type for example, should be interposed between the sensor and the load, □ if I y maximum switching capacity, check for wiring faults (short-circuit). ■ In all cases, a 0.4 A "quick-blow" fuse should be fitted in series with the sensor.
	Wiring error	■ Check that the wiring conforms to the wiring shown on the sensor label or instruction sheet.
	Supply fault	■ Check that the sensor is compatible with the supply ($\sim$ or $---$). ■ Check that the supply voltage is within the voltage limits of the sensor. Remember that with a rectified, smoothed supply, $U_{peak} = U_{nominal} \times \sqrt{2}$ with a ripple voltage γ 10 %.
False or erratic operation, with or without the presence of a metal object in the detection zone	On flush mountable sensor using teach mode: setting-up or programming error.	■ After a RESET, follow the environment teach mode procedure. Refer to instruction sheet supplied with sensor.
	Influence of background or metal environment	■ Refer to the instruction sheet supplied with the sensor. For sensors with adjustable sensitivity, reduce the sensing distance.
	Sensing distance poorly defined for the object to be detected	■ Apply the correction coefficients. ■ Realign the system or run the teach mode again.
	Influence of transient interference on the supply lines	■ Ensure that any DC supplies, when derived from rectified AC, are correctly smoothed ($C > 400 \mu F$). ■ Separate AC power cables from low-level DC cables (24 V low level). ■ Where very long distances are involved, use suitable cable: screened and twisted pairs of the correct cross-sectional area.
	Equipment prone to emitting electromagnetic interference	■ Position the sensors as far away as possible from any sources of interference.
	Response time of the sensor too slow for the particular object being detected	■ Check the suitability of the sensor for the position or size of the object to be detected. ■ If necessary, select a sensor with a higher switching frequency.
	Influence of high temperature	■ Eliminate sources of radiated heat or protect the sensor casing with a heat shield. ■ Realign, having adjusted the temperature around the fixing support.
No detection following a period of service	Vibration, shock	■ Realign the system. ■ Replace the support or protect the sensor.

Inductive proximity sensors

OsiSense XS

Flush mountability using teach mode:
simplicity through innovation

Operating principle

In proposing flush mountable sensors using teach mode, Telemecanique Sensors offers simplicity through innovation.

■ A single product enables flush mounting using teach mode and meets all the requirements for inductive detection of metal objects.
By simply pressing the "Teach mode" button, the sensor automatically acquires optimum configuration for all detection, flush mountability and environment requirements.

■ Other advantages of flush mountable sensors using teach mode

□ Increased performance:

- sensing distance guaranteed and optimised irrespective of the mounting method, object, environment or background,
- suitable for all metal environments.

□ Simplified use provided by:

- the flush mountability using teach mode technology, associated with the availability of the flattest and most compact sensors on the market, ensures full integration in the machine and limits the risks of mechanical damage,
- mechanical adjustments no longer necessary due to teach mode.

□ Lower costs due to:





- the elimination of adjustment times and complex supports
- the elimination of flush mountable and non flush mountable versions, which halves the number of references,
- much easier and much quicker product selection.

Precision position detection

All flush mountable inductive proximity sensors using teach mode benefit from ultra precise adjustment, which is very quick irrespective of the metal environment.

■ Precision side approach detection makes it possible to accurately define the distance at which the object will be detected as it passes the sensor.
On the flush mountable sensors using teach mode, the desired detection position can be stored in memory by simply pressing the teach button.

■ Precision frontal approach detection makes it possible to accurately define the distance at which the object will be detected as it approaches the sensor.
On the flush mountable sensors using teach mode, the desired detection position can be stored in memory by simply pressing the teach button.

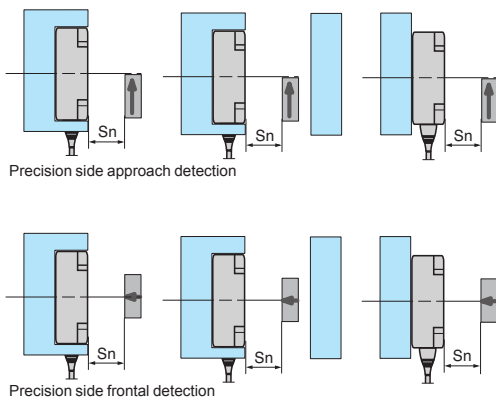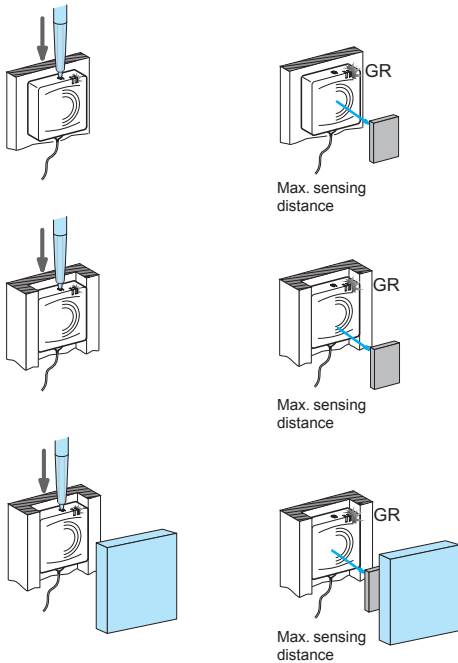

Mounting accessories

Telemecanique Sensors offers a complete, inexpensive range of mounting accessories (clamps, plates, brackets, etc.) that provide solutions for all installation problems.

■ Fixing kits for quick installation or replacement of sensors

■ No adjustment required. Simple clipping-in enables the sensor to be fixed in position and ready for operation.

Inductive proximity sensors
OsiSense XS
Flush mountability using teach mode:
simplicity through innovation



Block type			
Dimensions (mm)	26 x 26 x 13	40 x 40 x 15	80 x 80 x 26
Sensing distance (mm)	Flush mounted use	0...10	0...15
	Non flush mounted use	0...15	0...25
Sensor type	XS8E1A1	XS8C1A1	XS8D1A1
Page	3/72		


Cylindrical type			
Dimensions (mm)	12	18	30
Sensing distance (mm)	Flush mounted use	0...3.4	0...6
	Non flush mounted use	0...5	0...9
Sensor type	XS612B2	XS618B2	XS630B2
Page	3/70		

Inductive proximity sensors

OsiSense XS, general purpose


Cylindrical, standard range, flush mountable

Three-wire DC, solid-state output



XS506B1●●L2


3




XS508B1●●L2




XS512B1●●M12




XS518B1●●M12



XS518B1●●●L2



XS530B1●●L2



XSZB1●●

Sensors, 3-wire 12-24 V, short case model

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg		
Ø 6.5, plain							
1.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS506B1PAL2	0.035		
			M8 connector	XS506B1PAM8	0.025		
			M12 connector	XS506B1PAM12	0.025		
		NPN	Pre-cabled (L = 2 m) (1)	XS506B1NAL2	0.035		
			M8 connector	XS506B1NAM8	0.025		
			NC	PNP	Pre-cabled (L = 2 m) (1)	XS506B1PBL2	0.035
	M8 connector	XS506B1PBM8			0.025		
	NPN	Pre-cabled (L = 2 m) (1)			XS506B1NBL2	0.035	
		M8 connector		XS506B1NBM8	0.025		
		Ø 8, threaded M8 x 1					
	1.5	NO		PNP	Pre-cabled (L = 2 m) (1)	XS508B1PAL2	0.035
			M8 connector		XS508B1PAM8	0.025	
M12 connector			XS508B1PAM12		0.025		
NPN			Pre-cabled (L = 2 m) (1)	XS508B1NAL2	0.035		
			M8 connector	XS508B1NAM8	0.025		
			M12 connector	XS508B1NAM12	0.025		
NC		PNP	Pre-cabled (L = 2 m) (1)	XS508B1PBL2	0.035		
			M8 connector	XS508B1PBM8	0.025		
			M12 connector	XS508B1PBM12	0.025		
		NPN	Pre-cabled (L = 2 m) (1)	XS508B1NBL2	0.035		
			M8 connector	XS508B1NBM8	0.025		
			M12 connector	XS508B1NBM12	0.025		
Ø 12, threaded M12 x 1							
2	NO	PNP	Pre-cabled (L = 2 m) (1)	XS512B1PAL2	0.075		
			M12 connector	XS512B1PAM12	0.035		
			NPN	Pre-cabled (L = 2 m) (1)	XS512B1NAL2	0.075	
		M12 connector		XS512B1NAM12	0.035		
		NC		PNP	Pre-cabled (L = 2 m) (1)	XS512B1PBL2	0.075
			M12 connector		XS512B1PBM12	0.035	
	NPN		Pre-cabled (L = 2 m) (1)		XS512B1NBL2	0.075	
			M12 connector	XS512B1NBM12	0.035		
			Ø 18, threaded M18 x 1				
	5		NO	PNP	Pre-cabled (L = 2 m) (1)	XS518B1PAL2	0.120
		M12 connector			XS518B1PAM12	0.060	
		NPN			Pre-cabled (L = 2 m) (1)	XS518B1NAL2	0.120
M12 connector				XS518B1NAM12	0.060		
NC				PNP	Pre-cabled (L = 2 m) (1)	XS518B1PBL2	0.120
		M12 connector			XS518B1PBM12	0.060	
		NPN	Pre-cabled (L = 2 m) (1)		XS518B1NBL2	0.120	
			M12 connector	XS518B1NBM12	0.060		
			Ø 30, threaded M30 x 1.5				
		10	NO	PNP	Pre-cabled (L = 2 m) (1)	XS530B1PAL2	0.205
M12 connector					XS530B1PAM12	0.145	
NPN					Pre-cabled (L = 2 m) (1)	XS530B1NAL2	0.205
	M12 connector			XS530B1NAM12	0.145		
	NC			PNP	Pre-cabled (L = 2 m) (1)	XS530B1PBL2	0.205
M12 connector					XS530B1PBM12	0.145	
NPN			Pre-cabled (L = 2 m) (1)		XS530B1NBL2	0.205	
			M12 connector	XS530B1NBM12	0.145		

Accessories (2)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m cable replace L2 by L5; for a 10 m cable replace L2 by L10.

Example: XS508B1PAL2 becomes XS508B1PAL5 with a 5 m cable.


(2) For more information, see page 3/116.

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, standard range, flush mountable


Three-wire DC, solid-state output




XS506BL●●L2



XS508BL●●L2



XS512BL●●M12



XS530BL●●L2

Sensors, 3-wire 12-48 V, long case model

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 6.5, plain					
1.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS506BLPAL2	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS506BLNAL2	0.035

Ø 8, threaded M8 x 1

1.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS508BLPAL2	0.035
			M12 connector	XS508BLPAM12	0.025
	NPN		Pre-cabled (L = 2 m) (1)	XS508BLNAL2	0.035
			M12 connector	XS508BLNAM12	0.025
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS508BLPBL2	0.035
			M12 connector	XS508BLPBM12	0.025
	NPN		Pre-cabled (L = 2 m) (1)	XS508BLNBL2	0.035
			M12 connector	XS508BLNBM12	0.025

Ø 12, threaded M12 x 1

2	NO	PNP	Pre-cabled (L = 2 m) (1)	XS512BLPAL2	0.075
			M12 connector	XS512BLPAM12	0.035
	NPN		Pre-cabled (L = 2 m) (1)	XS512BLNAL2	0.075
			M12 connector	XS512BLNAM12	0.035
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS512BLPBL2	0.075
			M12 connector	XS512BLPBM12	0.035
	NPN		Pre-cabled (L = 2 m) (1)	XS512BLNBL2	0.075
			M12 connector	XS512BLNBM12	0.035

Ø 18, threaded M18 x 1

5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS518BLPAL2	0.120
			M12 connector	XS518BLPAM12	0.060
	NPN		Pre-cabled (L = 2 m) (1)	XS518BLNAL2	0.120
			M12 connector	XS518BLNAM12	0.060
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS518BLPBL2	0.120
			M12 connector	XS518BLPBM12	0.060
	NPN		Pre-cabled (L = 2 m) (1)	XS518BLNBL2	0.120
			M12 connector	XS518BLNBM12	0.060

Ø 30, threaded M30 x 1.5

10	NO	PNP	Pre-cabled (L = 2 m) (1)	XS530BLPAL2	0.205
			M12 connector	XS530BLPAM12	0.145
	NPN		Pre-cabled (L = 2 m) (1)	XS530BLNAL2	0.205
			M12 connector	XS530BLNAM12	0.145
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS530BLPBL2	0.205
			M12 connector	XS530BLPBM12	0.145
	NPN		Pre-cabled (L = 2 m) (1)	XS530BLNBL2	0.205
			M12 connector	XS530BLNBM12	0.145

Accessories (2)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m cable replace L2 by L5; for a 10 m cable replace L2 by L10.

Example: **XS508BLPAL2** becomes **XS508BLPAL5** with a 5 m cable.

(2) For more information, see page 3/116.

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, standard range, flush mountable


Three-wire DC, solid-state output

Characteristics			
Sensor type		XS5●●B1●●M8, XS5●●B1●●M12 XS5●●BL●●M8, XS5●●BL●●M12	XS5●●B1●●L2 XS5●●BL●●L2
Product certifications		UL, CSA, CE, E2	
Connection	Connector	M8 on Ø 6.5 and Ø 8, M12 on Ø 8, Ø 12, Ø 18 and Ø 30	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 6.5 and Ø 8	mm	0...1.2
	Ø 12	mm	0...1.6
	Ø 18	mm	0...4
	Ø 30	mm	0...8
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529	IP 65 and IP 67	IP 65 and IP 68, double insulation □ (except Ø 6.5 and Ø 8: IP 67)
	Conforming to DIN 40050	IP 69K for Ø 12 to Ø 30	
Storage temperature		°C	-40...+85
Operating temperature		°C	-25...+70
Materials	Case	Nickel plated brass (except XS506 and XS508BL: stainless steel, grade 303)	
	Sensing face	PPS	
	Cable	—	PvR 3 x 0.34 mm² except XS506 and XS508 : 3 x 0.11 mm²
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 50 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED: 4 viewing ports at 90°	Yellow LED: annular
Rated supply voltage		V	--- 12...48 for XS5●●BL --- 12...24 for XS5●●B1 with protection against reverse polarity
Voltage limits (including ripple)		V	--- 10...58 for XS5●●BL --- 10...36 for XS5●●B1
Switching capacity		mA	≤ 200 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Current consumption, no-load		mA	≤ 10
Maximum switching frequency	XS506, XS508, XS512	Hz	5000
	XS518	Hz	2000
	XS530	Hz	1000
Delays	First-up	ms	≤ 10
	Response	ms	≤ 0.1: XS506 , XS508 and XS512 ≤ 0.15: XS518 ≤ 0.3: XS530
	Recovery	ms	≤ 0.1: XS506 , XS508 and XS512 ≤ 0.35: XS518 ≤ 0.7: XS530

Wiring schemes

Connector


M8 M12




Pre-cabled

BU: Blue
BN: Brown
BK: Black

PNP






NPN



For M8 connector, NO and NC outputs on terminal 4

Setting-up

Minimum mounting distances (mm)



Flush mountable sensors

Ø 6.5

Ø 8

Ø 12

Ø 18

Ø 30

Side by side

$e \geq 3$

$e \geq 3$

$e \geq 4$

$e \geq 10$

$e \geq 20$

Face to face

$e \geq 18$

$e \geq 18$

$e \geq 24$

$e \geq 60$

$e \geq 120$

Facing a metal object

$e \geq 4.5$


$e \geq 4.5$

$e \geq 6$

$e \geq 15$

$e \geq 30$

Dimensions



(1) LED


Sensors		Pre-cabled (mm)		M8 connector (mm)		M12 connector (mm)	
Short case model		a	b	a	b	a	b
Ø 6.5	XS506B1	33	—	42	—	45	—
Ø 8	XS508B1	33	25	42	26	45	24
Ø 12	XS512B1	35	25	—	—	50	30
Ø 18	XS518B1	39	28	—	—	50	28
Ø 30	XS530B1	43	32	—	—	55	32
Sensors		Pre-cabled (mm)		M12 connector (mm)			
Long case model		a	b	a	b		
Ø 6.5	XS506BL	51	—	—	—		
Ø 8	XS508BL	51	42	62	40		
Ø 12	XS512BL	53	42	62	42		
Ø 18	XS518BL	62	52	74	52		
Ø 30	XS530BL	62	52	74	52		

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, standard range, flush mountable


Two-wire DC




XS506BS●●L2



XS512BS●●L2



XS5●●BS●●M12



XSZB1●●

Sensors, 2-wire 12-24 V, short case model

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 6.5, plain				
1.5	NO terminals 1 & 4 (2)	Pre-cabled (L = 2 m) (1)	XS506BSCAL2	0.035
		Remote M12 connector	XS506BSCAL01M12	0.050
	NC	Pre-cabled (L = 2 m) (1)	XS506BSCBL2	0.035
Ø 8, threaded M8 x 1				
1.5	NO terminals 1 & 4 (2)	Pre-cabled (L = 2 m) (1)	XS508BSCAL2	0.035
		Remote M12 connector	XS508BSCAL01M12	0.050
		Remote M12 connector	XS508BSCAL08M12	0.050
	NC	Pre-cabled (L = 2 m) (1)	XS508BSCBL2	0.035
		Remote M12 connector	XS508BSCBL01M12	0.050
Ø 12, threaded M12 x 1				
2	NO	Pre-cabled (L = 2 m) (1)	XS512BSDAL2	0.075
		M12 connector	XS512BSDAM12	0.035
	NO terminals 1 & 4 (2)	M12 connector	XS512BSCAM12	0.035
		Remote M12 connector	XS512BSCAL08M12	0.060
	NC	Pre-cabled (L = 2 m) (1)	XS512BSDBL2	0.075
		M12 connector	XS512BSDBM12	0.035
Ø 18, threaded M18 x 1				
5	NO	Pre-cabled (L = 2 m) (1)	XS518BSDAL2	0.120
		M12 connector	XS518BSDAM12	0.060
	NO terminals 1 & 4 (2)	M12 connector	XS518BSCAM12	0.060
		Remote M12 connector	XS518BSCAL08M12	0.085
	NC	Pre-cabled (L = 2 m) (1)	XS518BSDBL2	0.120
		M12 connector	XS518BSDBM12	0.060
Ø 30, threaded M30 x 1.5				
10	NO	Pre-cabled (L = 2 m) (1)	XS530BSDAL2	0.205
		M12 connector	XS530BSDAM12	0.145
	NO terminals 1 & 4 (2)	M12 connector	XS530BSCAM12	0.145
		Remote M12 connector	XS530BSCAL08M12	0.170
	NC	Pre-cabled (L = 2 m) (1)	XS530BSDBL2	0.205
		M12 connector	XS530BSDBM12	0.145

Accessories (3)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m cable replace L2 by L5; for a 10 m cable replace L2 by L10.

Example: XS508BSCAL2 becomes **XS508BSCAL5** with a 5 m cable.

(2) The NO output is connected to terminals 1 and 4 of the M12 connector.


(3) For more information, see page 3/116.

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, standard range, flush mountable


Two-wire DC




XS500B100L2




XS500B100M12

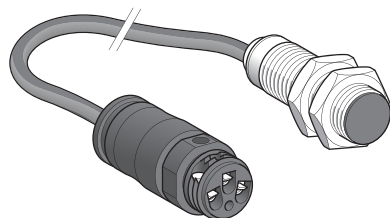


XS500B100L01B (2)

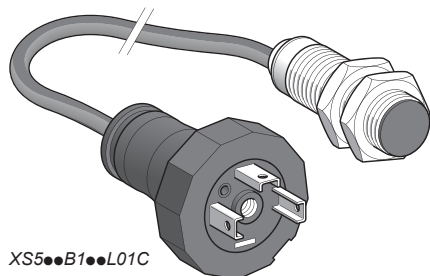

XS500B100L01C

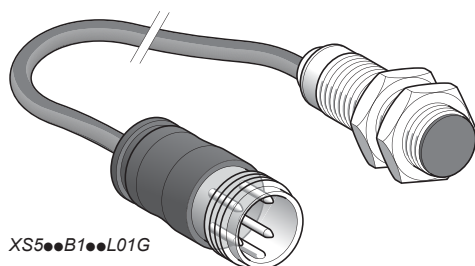

XS500B100L01G



XSZB100

Sensors, 2-wire $\overline{\text{---}}$ 12-48 V, long case model

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 8, threaded M8 x 1				
1.5	NO	Pre-cabled (L = 2 m) (1)	XS508B1DAL2	0.035
		Remote M12 connector	XS508B1DAL08M12	0.050
		M12 connector	XS508B1DAM12	0.025
	NO terminals 1 & 4 (3)	M12 connector	XS508B1CAM12	0.025
		Remote M12 connector	XS508B1CAL08M12	0.050
	NC	Pre-cabled (L = 2 m) (1)	XS508B1DBL2	0.035
M12 connector		XS508B1DBM12	0.025	
Ø 12, threaded M12 x 1				
2	NO	Pre-cabled (L = 2 m) (1)	XS512B1DAL2	0.075
		Remote 7/8" connector	XS512B1DAL08U78	0.050
		M12 connector	XS512B1DAM12	0.035
	NO terminals 1 & 4 (3)	M12 connector	XS512B1CAM12	0.035
		Remote M12 connector	XS512B1CAL08M12	0.060
	NC	Pre-cabled (L = 2 m) (1)	XS512B1DBL2	0.075
		M12 connector	XS512B1DBM12	0.035
		Remote M12 connector	XS512B1DBL08M12	0.060
	Ø 18, threaded M18 x 1			
5	NO	Pre-cabled (L = 2 m) (1)	XS518B1DAL2	0.120
		Low temperature version (-40 °C)	XS518B1DAL2TF (5)	0.120
		Remote screw terminal connector (2)	XS518B1DAL01B	0.085
		Remote EN 175301-803-A connector	XS518B1DAL01C	0.085
		Remote M18 connector	XS518B1DAL01G	0.085
		M12 connector	XS518B1DAM12	0.060
	NO terminals 1 & 4 (3)	M12 connector	XS518B1CAM12	0.060
		Remote M12 connector	XS518B1CAL08M12	0.085
	NC	Pre-cabled (L = 2 m) (1)	XS518B1DBL2	0.120
		M12 connector	XS518B1DBM12	0.060
		Remote M12 connector	XS518B1DBL08M12	0.085
		Remote screw terminal connector (2)	XS518B1DBL01B	0.120
Ø 30, threaded M30 x 1.5				
10	NO	Pre-cabled (L = 2 m) (1)	XS530B1DAL2	0.205
		Low temperature version (-40 °C)	XS530B1DAL2TF (5)	0.205
		M12 connector	XS530B1DAM12	0.145
		Remote screw terminal connector (2)	XS530B1DAL01B	0.205
		Remote EN 175301-803-A connector	XS530B1DAL01C	0.205
		Remote M18 connector	XS530B1DAL01G	0.205
	NO terminals 1 & 4 (3)	M12 connector	XS530B1CAM12	0.145
		Remote M12 connector	XS530B1CAL08M12	0.170
	NC	Pre-cabled (L = 2 m) (1)	XS530B1DBL2	0.205
		M12 connector	XS530B1DBM12	0.145
		Remote screw terminal connector (2)	XS530B1DBL01B	0.205

Accessories (4)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m cable replace L2 by L5; for a 10 m cable replace L2 by L10.

Example: XS508B1DAL2 becomes XS508B1DAL5 with a 5 m cable.

(2) Protective cable gland included with sensor.

(3) The NO output is connected to terminals 1 and 4 of the M12 connector.

(4) For more information, see page 3/116.

(5) For a 5 m cable replace L2 by L5.

Example: XS518B1DAL2TF becomes XS518B1DAL5TF with a 5 m cable.

For a PUR cable, replace the letter L by P in the reference.

Example: XS518B1DAL2TF becomes XS518B1DAP2TF.

For a 5 m PUR cable, replace P2 by P5.

Example: XS518B1DAP2TF becomes XS518B1DAP5TF with a 5 m PUR cable.

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, standard range, flush mountable

Two-wire DC

Characteristics					
Sensor type			XS5●●B1●●M12, XS5●●BS●●M12		XS5●●B1D●L2, XS5●●BS●●L2
Product certifications			UL, CSA, CE		
Connection	Connector		M12		–
	Pre-cabled		–		Length: 2 m
	Remote connector		M12 (L01M12), screw terminal (L01B), EN 175301-803-A (L01C) and M18 (L01G) remote connectors on 0.15 m flying lead M12 (L08M12) and 7/8" (L08U78) remote connectors on 0.80 m flying lead		
Operating zone	Ø 6.5	mm	0...1.2		
	Ø 8	mm	0...1.2		
	Ø 12	mm	0...1.6		
	Ø 18	mm	0...4		
	Ø 30	mm	0...8		
Differential travel		%	1...15 of effective sensing distance (Sr)		
Degree of protection	Conforming to IEC 60529		IP 65 and IP 67		IP 65 and IP 68, double insulation □ (except Ø 6.5 and Ø 8: IP 67)
Storage temperature		°C	-40...+85		
Operating temperature		°C	-25...+70; TF products: -40...+70		
Materials	Case		Nickel plated brass (except XS506 and XS508B1: stainless steel, grade 303)		
	Sensing face		PPS		
	Cable		–		PvR 2 x 0.34 mm² (except XS506 and XS508: 2 x 0.11 mm²) PUR available (1)
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)		
Shock resistance	Conforming to IEC 60068-2-27		50 gn, duration 11 ms		
Output state indication			Yellow LED: 4 viewing ports at 90°		Yellow LED: annular
Rated supply voltage		V	⎓ 12...48 non polarised for XS5●●B1● ⎓ 12...24 non polarised for XS5●●BS (except Ø 6.5 short and Ø 8 short: polarised) with protection against reverse polarity		
Voltage limits (including ripple)		V	⎓ 10...58 for XS5●●B1● ⎓ 10...36 for XS5●●BS		
Switching capacity		mA	1.5...100 with overload and short-circuit protection		
Voltage drop, closed state		V	≤ 4.2		
Residual current, open state		mA	≤ 0.5		
Maximum switching frequency	XS506, XS508	Hz	1000 for XS5●●BS, 1400 for XS5●●B1●		
	XS512	Hz	1000		
	XS518	Hz	1200		
	XS530	Hz	1300		
Delays	First-up	ms	≤ 10		
	Response	ms	≤ 0.5: XS506, XS508 and XS512 ≤ 0.6: XS518 ≤ 0.6: XS530		
	Recovery	ms	≤ 0.2 (except XS530 ≤ 0.4)		

(1) For PUR cable, replace the letter L in the reference by P. Example: XS506BSCAL2 becomes XS506BSCAP2 with a PUR cable.

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, standard range, flush mountable

Two-wire DC

Wiring schemes

Connector

M12




Pre-cabled

BU: Blue
BN: Brown


2-wire non polarised

NO output

XS5...B...DA...




XS5...B1CA...



NC output


XS5...B...DB...



2-wire polarised


NO output

XS5...BSCA...



NC output

XS5...BSCB...




Remote connectors L01B, L01C, L01G


Screw terminal (L01B)

The terminal numbering differs according to the version (2-wire , 3-wire , 2-wire).

EN 175301-803-A (L01C)




M18 (L01G)



The NO or NC outputs are connected to terminal 2.


Setting-up

Minimum mounting distances (mm)




Side by side

Ø 6.5	$e \geq 3$
Ø 8	$e \geq 3$
Ø 12	$e \geq 4$
Ø 18	$e \geq 10$
Ø 30	$e \geq 20$



Face to face


$e \geq 18$
$e \geq 18$
$e \geq 24$
$e \geq 60$
$e \geq 120$



Facing a metal object

$e \geq 4.5$
$e \geq 4.5$
$e \geq 6$
$e \geq 15$
$e \geq 30$

Dimensions



(1) LED


Sensors		Pre-cabled (mm)		M8 connector (mm)		M12 connector (mm)	
Short case model		a	b	a	b	a	b
Ø 6.5	XS506BS	33	—	42	—	45	—
Ø 8	XS508BS	33	25	42	26	45	24
Ø 12	XS512BS	35	25	—	—	50	30
Ø 18	XS518BS	39	28	—	—	50	28
Ø 30	XS530BS	43	32	—	—	55	32
Sensors		Pre-cabled (mm)		M12 connector (mm)			
Long case model		a	b	a	b		
Ø 8	XS508B1	51	42	62	40		
Ø 12	XS512B1	54	42	61	42		
Ø 18	XS518B1	56	44	64	44		
Ø 30	XS530B1	54	41	72	41		

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, standard range, flush mountable


Two-wire AC or DC ⁽¹⁾




XS512B1MAL2



XS518B1MAU20



XS530B1MAL2



XSZB112

Sensors, 2-wire ~ 24-240 V, long case model

Ø 12, threaded M12 x 1

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
2	NO	Pre-cabled (L = 2 m) (2)	XS512B1MAL2	0.075
		1/2"-20 UNF connector	XS512B1MAU20	0.025
	NC	Pre-cabled (L = 2 m) (2)	XS512B1MBL2	0.075
		1/2"-20 UNF connector	XS512B1MBU20	0.025

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
5	NO	Pre-cabled (L = 2 m) (2)	XS518B1MAL2	0.100
		1/2"-20 UNF connector	XS518B1MAU20	0.060
	NC	Pre-cabled (L = 2 m) (2)	XS518B1MBL2	0.100
		1/2"-20 UNF connector	XS518B1MBU20	0.060

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
10	NO	Pre-cabled (L = 2 m) (2)	XS530B1MAL2	0.205
		1/2"-20 UNF connector	XS530B1MAU20	0.145
	NC	Pre-cabled (L = 2 m) (2)	XS530B1MBL2	0.205
		1/2"-20 UNF connector	XS530B1MBU20	0.145

Accessories (3)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) Ø8 plastic, double insulation version available (see page 3/60).

(2) For a 5 m cable replace L2 by L5; for a 10 m cable replace L2 by L10.

Example: **XS512B1MAL2** becomes **XS512B1MAL5** with a 5 m cable.


(3) For more information, see page 3/116.

Characteristics

Sensor type		XS5...B1M...U20	XS5...B1M...L2
Product certifications		UL, CSA, CEC	
Connection	Connector	1/2"-20 UNF	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 12	mm	0...1.6
	Ø 18	mm	0...4
	Ø 30	mm	0...8
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529	IP 65 and IP 67	
	Conforming to DIN 40050	IP 69K	
Storage temperature		°C	-40...+85
Operating temperature		°C	-25...+70
Materials	Case	Nickel plated brass	
	Sensing face	PPS	
	Cable	—	PvR 2 x 0.34 mm ²
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED: 4 viewing ports at 90°	Yellow LED: annular
Rated supply voltage		V	~ or — 24...240 (~ 50/60 Hz)
Voltage limits (including ripple)		V	~ or — 20...264
Switching capacity	XS512B1M...	mA	5...200 (1)
	XS518B1M..., XS530B1M...	mA	~ 5...300 or — 5...200 (1)
Voltage drop, closed state		V	≤ 5.5
Residual current, open state		mA	≤ 0.8
Maximum switching frequency	XS512B1..., XS518B1M...	Hz	~ 25 or — 1000
	XS530B1M...	Hz	~ 25 or — 500
Delays	First-up	ms	≤ 20 XS512B1M... ≤ 25 XS518B1M... and XS530B1M...
	Response	ms	≤ 0.5
	Recovery	ms	≤ 0.2 XS512B1M... ≤ 0.5 XS518B1M... ≤ 2 XS518B1M...

(1) It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Wiring schemes

Connector	Pre-cabled	2-wire ~ or —
1/2"-20 UNF	BU: Blue BN: Brown	NO or NC output
		
		±: on connector models only


Setting-up

Minimum mounting distances (mm)

Sensor	Side by side	Face to face	Facing a metal object
Ø 12	e ≥ 8	e ≥ 48	e ≥ 12
Ø 18	e ≥ 16	e ≥ 100	e ≥ 25
Ø 30	e ≥ 30	e ≥ 180	e ≥ 45

Dimensions

Sensor	XS6			
	Pre-cabled (mm)		Connector (mm)	
	a	b	a	b
XS512B1M	53	42	62	42
XS518B1M	62	52	73	52
XS530B1M	62	52	73	52




(1) LED

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, flush mountable


Three-wire DC, solid-state output



XS106B3●●L2



XS108B3●●M8



XS112B3●●L2

Sensors, 3-wire 12-24 V, short case model

Sensing distance (Sn) mm	Function	Output	Connection	Sold in lots of	Unit reference	Weight kg
Ø 6.5, plain						
2.5	NO	PNP	Pre-cabled (L = 2 m) (1)	1	XS106B3PAL2	0.060
			M8 connector	1	XS106B3PAM8	0.030
			M12 connector	1	XS106B3PAM12	0.050
		NPN	Pre-cabled (L = 2 m)	20	XS106B3PAL2TQ	0.980
			M8 connector	20	XS106B3PAM8TQ	0.320
			M12 connector	1	XS106B3PAM12	0.050
	NC	PNP	Pre-cabled (L = 2 m) (1)	1	XS106B3PBL2	0.060
			M8 connector	1	XS106B3PBM8	0.030
			M12 connector	1	XS106B3PBM12	0.050
		NPN	Pre-cabled (L = 2 m) (1)	1	XS106B3NBL2	0.060
			M8 connector	1	XS106B3NBM8	0.030
			M12 connector	1	XS106B3NBM12	0.050

Ø 8, threaded M8 x 1

2.5	NO	PNP	Pre-cabled (L = 2 m) (1)	1	XS108B3PAL2	0.070
			M8 connector	1	XS108B3PAM8	0.030
			M12 connector	1	XS108B3PAM12	0.060
		NPN	Pre-cabled (L = 2 m)	20	XS108B3PAL2TQ	1.120
			M8 connector	20	XS108B3PAM8TQ	0.460
			M12 connector	20	XS108B3PAM12TQ	0.940
	NC	PNP	Pre-cabled (L = 2 m) (1)	1	XS108B3PBL2	0.070
			M8 connector	1	XS108B3PBM8	0.030
			M12 connector	1	XS108B3PBM12	0.060
		NPN	Pre-cabled (L = 2 m) (1)	1	XS108B3NBL2	0.070
			M8 connector	1	XS108B3NBM8	0.030
			M12 connector	1	XS108B3NBM12	0.060

Ø 12, threaded M12 x 1

4	NO	PNP	Pre-cabled (L = 2 m) (1)	1	XS112B3PAL2	0.090
			M12 connector	1	XS112B3PAM12	0.030
			Pre-cabled (L = 2 m)	20	XS112B3PAL2TQ	1.600
		NPN	M12 connector	20	XS112B3PAM12TQ	0.470
			Pre-cabled (L = 2 m) (1)	1	XS112B3NAL2	0.090
			M12 connector	1	XS112B3NAM12	0.030
	NC	PNP	Pre-cabled (L = 2 m)	20	XS112B3NAL2TQ	1.600
			M12 connector	20	XS112B3NAM12TQ	0.470
			Pre-cabled (L = 2 m) (1)	1	XS112B3PBL2	0.090
		NPN	M12 connector	1	XS112B3PBM12	0.030
			M12 connector	20	XS112B3PBM12TQ	0.470
			Pre-cabled (L = 2 m) (1)	1	XS112B3NBL2	0.090
			M12 connector	1	XS112B3NBM12	0.030

(1) For a 5 m long cable replace L2 by L5.


Example: XS106B3PAL2 becomes **XS106B3PAL5** with a 5 m cable.

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, flush mountable


Three-wire DC, solid-state output




XS118B3●●M12



XS118B3●●L2



XS130B3●●L2



XSZB1●●

Sensors, 3-wire 12-24 V, short case model (continued)

Sensing distance (Sn) mm	Function	Output	Connection	Sold in lots of	Unit reference	Weight kg
Ø 18, threaded M18 x 1						
8	NO	PNP	Pre-cabled (L = 2 m) (1)	1	XS118B3PAL2	0.110
			M12 connector	1	XS118B3PAM12	0.060
		NPN	Pre-cabled (L = 2 m)	20	XS118B3PAL2TQ	2.000
			M12 connector	20	XS118B3PAM12TQ	1.140
	NC	PNP	Pre-cabled (L = 2 m) (1)	1	XS118B3NAL2	0.110
			M12 connector	1	XS118B3NAM12	0.060
		NPN	Pre-cabled (L = 2 m)	20	XS118B3NAL2TQ	2.000
			M12 connector	20	XS118B3NAM12TQ	1.140
		PNP	Pre-cabled (L = 2 m) (1)	1	XS118B3PBL2	0.110
			M12 connector	1	XS118B3PBM12	0.060
		NPN	Pre-cabled (L = 2 m) (1)	1	XS118B3NBL2	0.110
			M12 connector	1	XS118B3NBM12	0.060
Ø 30, threaded M30 x 1.5						
15	NO	PNP	Pre-cabled (L = 2 m) (1)	1	XS130B3PAL2	0.180
			M12 connector	1	XS130B3PAM12	0.130
		NPN	Pre-cabled (L = 2 m)	20	XS130B3PAL2TQ	3.360
			M12 connector	20	XS130B3PAM12TQ	2.000
	NC	PNP	Pre-cabled (L = 2 m) (1)	1	XS130B3NAL2	0.180
			M12 connector	1	XS130B3NAM12	0.130
		NPN	Pre-cabled (L = 2 m)	20	XS130B3NAL2TQ	2.000
			M12 connector	20	XS130B3NAM12TQ	2.000
		PNP	Pre-cabled (L = 2 m) (1)	1	XS130B3PBL2	0.180
			M12 connector	1	XS130B3PBM12	0.130
		NPN	Pre-cabled (L = 2 m) (1)	1	XS130B3NBL2	0.180
			M12 connector	1	XS130B3NBM12	0.130

Accessories (2)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8 (M8 x1)	XSZB108	0.006
	Ø 12 (M12 x1)	XSZB112	0.006
	Ø 18 (M18 x1)	XSZB118	0.010
	Ø 30 (M30 x 1.5)	XSZB130	0.020

(1) For a 5 m cable, replace L2 by L5.

Example: XS118B3PAL2 becomes XS118B3PAL5 with a 5 m cable.


(2) For more information, see page 3/116.

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, flush mountable


Three-wire DC, solid-state output




XS6...B1...L2




XS6...B1...M12

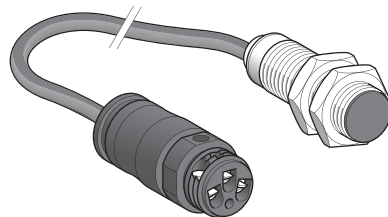


XS6...B1...L01B (2)

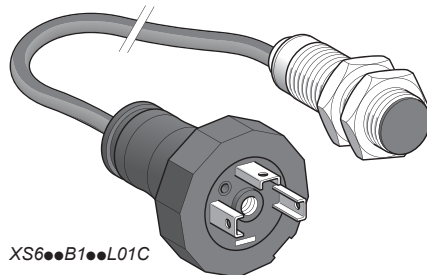

XS6...B1...L01C

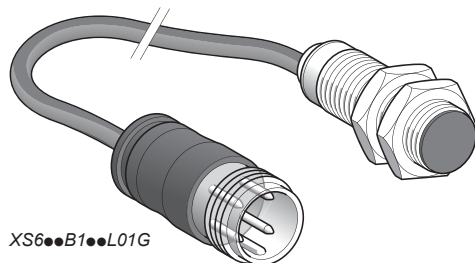

XS6...B1...L01G



XSZB...

Sensors, 3-wire 12-48 V, long case model

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 8, threaded M8 x 1					
2.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS608B1PAL2	0.035
			M12 connector	XS608B1PAM12	0.015
		NPN	Pre-cabled (L = 2 m) (1)	XS608B1NAL2	0.035
			M12 connector	XS608B1NAM12	0.015
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS608B1PBL2	0.035
			M12 connector	XS608B1PBM12	0.015
		NPN	Pre-cabled (L = 2 m) (1)	XS608B1NBL2	0.035
			M12 connector	XS608B1NBM12	0.015
Ø 12, threaded M12 x 1					
4	NO	PNP	Pre-cabled (L = 2 m) (1)	XS612B1PAL2	0.075
			M12 connector	XS612B1PAM12	0.020
		NPN	Pre-cabled (L = 2 m) (1)	XS612B1NAL2	0.075
			M12 connector	XS612B1NAM12	0.020
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS612B1PBL2	0.075
			M12 connector	XS612B1PBM12	0.020
		NPN	Pre-cabled (L = 2 m) (1)	XS612B1NBL2	0.075
			M12 connector	XS612B1NBM12	0.020
Ø 18, threaded M18 x 1					
8	NO	PNP	Pre-cabled (L = 2 m) (1)	XS618B1PAL2	0.100
			M12 connector	XS618B1PAM12	0.040
			Remote screw terminal connector	XS618B1PAL01B (2)	0.100
			Remote EN 175301-803-A connector	XS618B1PAL01C	0.100
		NPN	Pre-cabled (L = 2 m) (1)	XS618B1NAL2	0.100
			M12 connector	XS618B1NAM12	0.040
			Remote screw terminal connector	XS618B1NAL01B (2)	0.100
			Remote EN 175301-803-A connector	XS618B1NAL01C	0.100
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS618B1PBL2	0.100
			M12 connector	XS618B1PBM12	0.040
			Remote screw terminal connector	XS618B1PBL01B (2)	0.100
			Remote EN 175301-803-A connector	XS618B1PBL01C	0.100
		NPN	Pre-cabled (L = 2 m) (1)	XS618B1NBL2	0.100
			M12 connector	XS618B1NBM12	0.040
			Remote screw terminal connector	XS618B1NBL01B (2)	0.100
			Remote EN 175301-803-A connector	XS618B1NBL01C	0.100
Ø 30, threaded M30 x 1.5					
15	NO	PNP	Pre-cabled (L = 2 m) (1)	XS630B1PAL2	0.205
			M12 connector	XS630B1PAM12	0.145
			Remote screw terminal connector	XS630B1PAL01B (2)	0.205
			Remote EN 175301-803-A connector	XS630B1PAL01C	0.205
		NPN	Pre-cabled (L = 2 m) (1)	XS630B1NAL2	0.205
			M12 connector	XS630B1NAM12	0.145
			Remote screw terminal connector	XS630B1NAL01B (2)	0.205
			Remote EN 175301-803-A connector	XS630B1NAL01C	0.205
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS630B1PBL2	0.205
			M12 connector	XS630B1PBM12	0.145
			Remote screw terminal connector	XS630B1PBL01B (2)	0.205
			Remote EN 175301-803-A connector	XS630B1PBL01C	0.205
		NPN	Pre-cabled (L = 2 m) (1)	XS630B1NBL2	0.205
			M12 connector	XS630B1NBM12	0.145
			Remote screw terminal connector	XS630B1NBL01B (2)	0.205
			Remote EN 175301-803-A connector	XS630B1NBL01C	0.205

Accessories (3)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS608B1PAL2 becomes XS608B1PAL5 with a 5 m cable.

(2) Protective cable gland included with sensor.



(3) For more information, see page 3/116.

Characteristics					
Sensor type		XS1/XS6●●B●●M8		XS1/XS6●●B●●M12	XS1/XS6●●B●●L2
Product certifications		UL, CSA, CE, E2			
Connection	Connector	M8		M12	—
	Pre-cabled	—		—	Length 2 m
	Remote connector	Screw terminal (L01B), EN 175301-803-A (L01C) and M18 (L01G) remote connectors on 0.15 m flying lead			
Operating zone (1)	Ø 6.5 and Ø 8	mm	0...2		
	Ø 12	mm	0...3.2		
	Ø 18	mm	0...6.4		
	Ø 30	mm	0...12		
Differential travel		%	1...15 of effective sensing distance (Sr)		
Degree of protection	Conforming to IEC 60529	IP 65 and IP 67			IP 65 and IP 68, double insulation  except Ø 6.5 and Ø 8: IP 67
	Conforming to DIN 40050	IP 69K for Ø 12, 18 and 30 sensors			
Storage temperature		°C	-40...+85		
Operating temperature		°C	-25...+70		
Materials	Case	Nickel plated brass (except XS608: stainless steel, grade 303)			
	Sensing face	PPS			
	Cable	—			PvR 3 x 0.34 mm² except Ø 6.5 and 8: 3 x 0.11 mm²
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)			
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms			
Output state indication		Yellow LED, 4 viewing ports at 90°			Yellow LED, annular
Rated supply voltage		V	XS1: --- 12...24 with protection against reverse polarity XS6: --- 12...48 with protection against reverse polarity		
Voltage limits (including ripple)		V	XS1: --- 10...36; XS6: --- 10...58		
Switching capacity		mA	≤ 200 with overload and short-circuit protection		
Voltage drop, closed state		V	≤ 2		
Current consumption, no-load		mA	≤ 10		
Maximum switching frequency	Ø 6.5, Ø 8 and Ø 12	Hz	2500		
	Ø 18	Hz	1000		
	Ø 30	Hz	500		
Delays	First-up	ms	≤ 10		
	Response	ms	≤ 0.2 for Ø 6.5, Ø 8 and Ø 12, ≤ 0.3 for Ø 18, ≤ 0.6 for Ø 30		
	Recovery	ms	≤ 0.2 for Ø 6.5, Ø 8 and Ø 12, ≤ 0.7 for Ø 18, ≤ 1.4 for Ø 30		

(1) Detection curves, see page 3/120.

Wiring schemes


Connector (1)	Pre-cabled
M8  M12 	BU: Blue BN: Brown BK: Black

PNP	NPN
	

For M8 connector, NO and NC outputs on terminal 4


(1) For pin arrangement of remote connectors L01B, L01C and L01G, see page 3/31.

Setting-up

Minimum mounting distances (mm)			
			
Sensors	Side by side	Face to face	Facing a metal object
Ø 6.5	e ≥ 5	e ≥ 30	e ≥ 8
Ø 8	e ≥ 5	e ≥ 30	e ≥ 8
Ø 12	e ≥ 8	e ≥ 50	e ≥ 12
Ø 18	e ≥ 16	e ≥ 100	e ≥ 25
Ø 30	e ≥ 30	e ≥ 180	e ≥ 45

Dimensions

Sensors		Pre-cabled (mm)		M8 connector (mm)		M12 connector (mm)	
Short case model		a	b	a	b	a	b
Ø 6.5	XS106B3	33	—	42	—	45	—
Ø 8	XS108B3	33	25	42	26	45	24
Ø 12	XS112B3	35	25	—	—	50	30
Ø 18	XS118B3	39	28	—	—	50	28
Ø 30	XS130B3	43	32	—	—	55	32
Sensors		Pre-cabled (mm)		M12 connector (mm)			
Long case model		a	b	a	b		
Ø 8	XS608B1	51	42	62	40		
Ø 12	XS612B1	53	42	62	42		
Ø 18	XS618B1	62	52	74	52		
Ø 30	XS630B1	62	52	74	52		




(1) LED

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, flush mountable


Two-wire DC, solid-state output




XS606B3●●L2




XS612B3●●L2



XS6●●B1●●L2



XS6●●B1●●M12



XSZB1●●

Sensors, 2-wire 12-24 V, short case model

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 6.5, plain				
2.5	NO	Pre-cabled (L = 2 m) (1)	XS606B3CAL2	0.060
		Remote M12 connector	XS606B3CAL01M12	0.070
	NC	Pre-cabled (L = 2 m) (1)	XS606B3CBL2	0.060
Ø 8, threaded M8 x 1				
2.5	NO	Pre-cabled (L = 2 m) (1)	XS608B3CAL2	0.070
		Remote M12 connector	XS608B3CAL01M12	0.070
	NC	Pre-cabled (L = 2 m) (1)	XS608B3CBL2	0.070
		Remote M12 connector	XS608B3CBL01M12	0.070
Ø 12, threaded M12 x 1				
4	NO	Pre-cabled (L = 2 m) (1)	XS612B3DAL2	0.090
		M12 connector	XS612B3DAM12	0.030
	NC	Pre-cabled (L = 2 m) (1)	XS612B3DBL2	0.090
		M12 connector	XS612B3DBM12	0.030
Ø 18, threaded M18 x 1				
8	NO	Pre-cabled (L = 2 m) (1)	XS618B3DAL2	0.110
		M12 connector	XS618B3DAM12	0.060
	NC	Pre-cabled (L = 2 m) (1)	XS618B3DBL2	0.110
		M12 connector	XS618B3DBM12	0.060
Ø 30, threaded M30 x 1.5				
15	NO	Pre-cabled (L = 2 m) (1)	XS630B3DAL2	0.180
		M12 connector	XS630B3DAM12	0.130
	NC	Pre-cabled (L = 2 m) (1)	XS630B3DBL2	0.180
		M12 connector	XS630B3DBM12	0.180

Sensors, 2-wire 12-48 V, long case model

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 6.5, plain				
2.5	NO	Pre-cabled (L = 2 m) (1)	XS606B1DAL2	0.060
	NC	Pre-cabled (L = 2 m) (1)	XS606B1DBL2	0.060
Ø 8, threaded M8 x 1				
2.5	NO	Pre-cabled (L = 2 m) (1)	XS608B1DAL2	0.035
		M12 connector	XS608B1DAM12	0.015
	NC	Pre-cabled (L = 2 m) (1)	XS608B1DBL2	0.035
		M12 connector	XS608B1DBM12	0.015
Ø 12, threaded M12 x 1				
4	NO	Pre-cabled (L = 2 m) (1)	XS612B1DAL2	0.180
		M12 connector	XS612B1DAM12	0.020
	NC	Pre-cabled (L = 2 m) (1)	XS612B1DBL2	0.075
		M12 connector	XS612B1DBM12	0.020
Ø 18, threaded M18 x 1				
8	NO	Pre-cabled (L = 2 m) (1)	XS618B1DAL2	0.100
		M12 connector	XS618B1DAM12	0.040
	NC	Pre-cabled (L = 2 m) (1)	XS618B1DBL2	0.100
		M12 connector	XS618B1DBM12	0.040
Ø 30, threaded M30 x 1.5				
15	NO	Pre-cabled (L = 2 m) (1)	XS630B1DAL2	0.205
		M12 connector	XS630B1DAM12	0.145
	NC	Pre-cabled (L = 2 m) (1)	XS630B1DBL2	0.205
		M12 connector	XS630B1DBM12	0.145

Accessories (2)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8 (M8 x1)	XSZB108	0.006
	Ø 12 (M12 x1)	XSZB112	0.006
	Ø 18 (M18 x1)	XSZB118	0.010
	Ø 30 (M30 x 1.5)	XSZB130	0.020





(1) For a 5 m cable, replace L2 by L5.


Example: XS606B3CAL2 becomes **XS606B3CAL5** with a 5 m cable.

(2) For more information, see page 3/116.

Characteristics			
Sensor type		XS6...B3...M12 XS6...B1D...M12	XS6...B3...L2 XS6...B1D...L2
Product certifications		UL, CSA, CE	
Connection	Connector	M12 or remote M12 connector (L01M12) on 0.15 m flying lead	
	Pre-cabled	Length 2 m	
Operating zone (1)	Ø 6.5 and Ø 8	mm	0...2
	Ø 12	mm	0...3.2
	Ø 18	mm	0...6.4
	Ø 30	mm	0...12
Differential travel		1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529	IP 65 and IP 67	
	Conforming to DIN 40050	IP 69K	
Storage temperature		°C -40...+85	
Operating temperature		°C -25...+70	
Materials	Case	Nickel plated brass (except XS606B1D or XS608B1D: stainless steel, grade 303)	
	Sensing face	PPS	
	Cable	PvR 2 x 0.34 mm ² except Ø 6.5 and Ø 8: 2 x 0.11 mm ²	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED, 4 viewing ports at 90°	
Rated supply voltage		V --- 12...48 non polarised for XS6...B1D --- 12...24 non polarised for XS6...B3... (except Ø 6.5 short and Ø 8 short: polarised), with protection against reverse polarity	
Voltage limits (including ripple)		V --- 10...58 for XS6...B1D --- 10...36 for XS6...B3...	
Switching capacity		mA ≤ 100 with overload and short-circuit protection	
Voltage drop, closed state		V ≤ 4.2	
Residual current, open state		mA ≤ 0.5 mA	
Maximum switching frequency	Ø 6.5, Ø 8	Hz	1400 for XS6...B1D, 1100 for XS6...B3...
	Ø 12	Hz	1300
	Ø 18	Hz	1500
	Ø 30	Hz	800
Delays	First-up	ms	≤ 10
	Response	ms	≤ 0.5
	Recovery	ms	≤ 0.2 for Ø 6.5, Ø 8 and Ø 12; 0.3 for Ø 18; 0.6 for Ø 30

(1) Detection curves, see page 3/120.

Wiring schemes		Setting-up	
M12 connector	Pre-cabled	Minimum mounting distances (mm)	
	BU: Blue BN: Brown		
2-wire --- non polarised		Facing a metal object	
NO output	NC output	Sensors	
		Side by side	
		Face to face	
		Facing a metal object	
2-wire --- polarised		Ø 6.5	e ≥ 5
XS6...B3CA		Ø 8	e ≥ 5
XS6...B3CB		Ø 12	e ≥ 8
		Ø 18	e ≥ 16
		Ø 30	e ≥ 30

Dimensions		Sensors		Pre-cabled (mm)		M12 connector (mm)	
		Short case model		a	b	a	b
	Ø 6.5	XS606B3C	33	—	—	—	—
	Ø 8	XS608B3C	33	25	—	24	—
	Ø 12	XS612B3D	35	25	50	30	—
	Ø 18	XS618B3D	40	28	50	28	—
	Ø 30	XS630B3D	44	32	55	32	—
		Long case model		a	b	a	b
	Ø 6.5	XS606B1D	51	—	—	—	—
	Ø 8	XS608B1D	51	42	62	40	—
	Ø 12	XS612B1D	53	42	61	42	—
	Ø 18	XS618B1D	62	52	74	52	—
	Ø 30	XS630B1D	62	52	74	52	—


(1) LED

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, flush mountable


Two-wire AC or DC ⁽¹⁾




XS6...B1M...L2




XS6...B1...U20

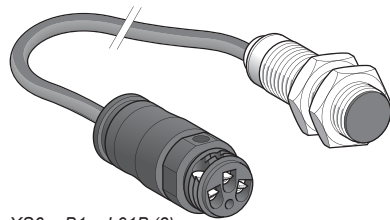


XS6...B1...L01B (3)

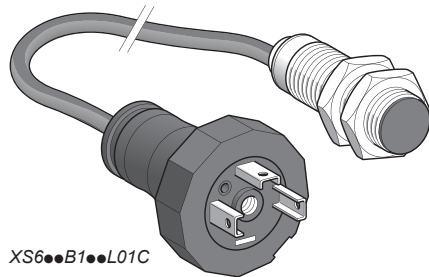

XS6...B1...L01C

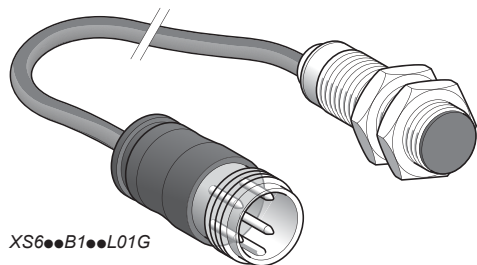

XS6...B1...L01G



XSZB1...

Sensors, 2-wire $\approx$ 24-240 V, long case model

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 12, threaded M12 x 1				
4	NO	Pre-cabled (L = 2 m) (2)	XS612B1MAL2	0.075
		1/2"-20 UNF connector	XS612B1MAU20	0.025
	NC	Pre-cabled (L = 2 m) (2)	XS612B1MBL2	0.075
		1/2"-20 UNF connector	XS612B1MBU20	0.025

Ø 18, threaded M18 x 1

8	NO	Pre-cabled (L = 2 m) (2)	XS618B1MAL2	0.100
		1/2"-20 UNF connector	XS618B1MAU20	0.060
		Remote screw terminal connector	XS618B1MAL01B (3)	0.100
		Remote EN 175301-803-A connector	XS618B1MAL01C	0.100
	NC	Remote M18 connector	XS618B1MAL01G	0.100
		Pre-cabled (L = 2 m) (2)	XS618B1MBL2	0.100
		1/2"-20 UNF connector	XS618B1MBU20	0.060
		Remote screw terminal connector	XS618B1MBL01B (3)	0.100
		Remote EN 175301-803-A connector	XS618B1MBL01C	0.100
		Remote M18 connector	XS618B1MBL01G	0.100

Ø 30, threaded M30 x 1.5

15	NO	Pre-cabled (L = 2 m) (2)	XS630B1MAL2	0.205
		1/2"-20 UNF connector	XS630B1MAU20	0.145
		Remote screw terminal connector	XS630B1MAL01B (3)	0.205
		Remote EN 175301-803-A connector	XS630B1MAL01C	0.205
	NC	Remote M18 connector	XS630B1MAL01G	0.205
		Pre-cabled (L = 2 m) (2)	XS630B1MBL2	0.205
		1/2"-20 UNF connector	XS630B1MBU20	0.145
		Remote screw terminal connector	XS630B1MBL01B (3)	0.205
		Remote EN 175301-803-A connector	XS630B1MBL01C	0.205
		Remote M18 connector	XS630B1MBL01G	0.205

Accessories (4)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) Ø8 plastic, double insulation version available (see page 3/60).

(2) For a 5 m cable replace L2 by L5; for a 10 m cable replace L2 by L10.

Example: XS612B1MAL2 becomes **XS612B1MAL5** with a 5 m cable.

(3) Protective cable gland included with sensor.

(4) For more information, see page 3/116.


Characteristics

Sensor type		XS6...B1M●U20	XS6...B1M●L●
Product certifications		UL, CSA, CE	
Connection	Connector	1/2" - 20 UNF	—
	Pre-cabled	—	Length 2 m
	Remote connector	Screw terminal (L01B), EN 175301-803-A (L01C) and M18 (L01G) remote connectors on 0.15 m flying lead	
Operating zone (1)	Ø 12	mm	0... 3.2
	Ø 18	mm	0... 6.4
	Ø 30	mm	0...12
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529	IP 65, IP 67	
	Conforming to DIN 40050	IP 69K	
Storage temperature		°C	-40...+85
Operating temperature		°C	-25...+70
Materials	Case	Nickel plated brass	
	Sensing face	PPS	
	Cable	PvR 2 x 0.34 mm ²	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED: annular on pre-cabled version Yellow LED with 4 viewing ports at 90° on connector version	
Rated supply voltage		V	≈ 24...240 (~ 50/60 Hz)
Voltage limits (including ripple)		V	≈ 20...264
Switching capacity	XS612B1M●●●	mA	5...200 (2)
	XS618B1M●●●	mA	~ 5...300 or ~ 5...200 (2)
	XS630B1M●●●	mA	~ 5...300 or ~ 5...200 (2)
Voltage drop, closed state		V	≤ 5.5
Residual current, open state		mA	≤ 0.8
Maximum switching frequency (DC/AC)	Ø 12	Hz	~ 1000 / ~ 25
	Ø 18	Hz	~ 1000 / ~ 25
	Ø 30	Hz	~ 500 / ~ 25
Delays	First-up	ms	≤ 25 for Ø 18 and Ø 30; ≤ 20 for Ø 12
	Response	ms	≤ 0.5
	Recovery	ms	≤ 0.2 for Ø 12; ≤ 0.5 for Ø 18; ≤ 2 for Ø 30

(1) Detection curves, see page 3/120.

(2) It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.




Wiring schemes

Connector (1)	Pre-cabled	2-wire ~ or —
1/2"-20 UNF 	BU: Blue BN: Brown	NO or NC output 
±: on connector models only		

(1) For pin arrangement of remote connectors L01B, L01C and L01G, see page 3/31.


Setting-up

Minimum mounting distances (mm)



Sensors	Side by side	Face to face	Facing a metal object
Ø 12	e ≥ 8	e ≥ 50	e ≥ 12
Ø 18	e ≥ 16	e ≥ 100	e ≥ 25
Ø 30	e ≥ 30	e ≥ 180	e ≥ 45

Dimensions



(1) LED


Sensors		Pre-cabled (mm)		Connector (mm)	
		a	b	a	b
Ø 12	XS612B1M●	53	42	62	42
Ø 18	XS618B1M●	62	52	73	52
Ø 30	XS630B1M●	62	52	73	52

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, increased range, non flush mountable


Three-wire DC, solid-state output




XS612B4●●L2



XS618B4●●M12



XS630B5●●M12



XSZB●●●

Sensors, 3-wire 12...48 V, long case model

Ø 12, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
7	NO	PNP	Pre-cabled (L = 2 m) (1)	XS612B4PAL2	0.075
			M12 connector	XS612B4PAM12	0.020
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS612B4NAL2	0.075
			M12 connector	XS612B4NAM12	0.020
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS612B4PBL2	0.075
			M12 connector	XS612B4PBM12	0.020
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS612B4NBL2	0.075
			M12 connector	XS612B4NBM12	0.020

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
12	NO	PNP	Pre-cabled (L = 2 m) (1)	XS618B4PAL2	0.100
			M12 connector	XS618B4PAM12	0.040
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS618B4NAL2	0.100
			M12 connector	XS618B4NAM12	0.040
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS618B4PBL2	0.100
			M12 connector	XS618B4PBM12	0.040
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS618B4NBL2	0.100
			M12 connector	XS618B4NBM12	0.040

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
30	NO	PNP	Pre-cabled (L = 2 m) (1)	XS630B5PAL2	0.205
			M12 connector	XS630B5PAM12	0.145
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS630B5NAL2	0.205
			M12 connector	XS630B5NAM12	0.145
	NC	PNP	Pre-cabled (L = 2 m) (1)	XS630B5PBL2	0.205
			M12 connector	XS630B5PBM12	0.145
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS630B5NBL2	0.205
			M12 connector	XS630B5NBM12	0.205

Accessories (2)

Description	For use with sensors	Reference	Weight kg
Fixing clamps	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS612B4PAL2 becomes XS612B4PAL5 with a 5 m cable.

(2) For more information, see page 3/116.

Inductive proximity sensors

OsiSense XS, general purpose



Cylindrical, increased range, non flush mountable

Three-wire DC, solid-state output

Characteristics


Sensor type		XS6...B...M12	XS6...B...L2
Product certifications		UL, CSA, CE, E2	
Connection	Connector	M12	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 12	mm	0...5.6
	Ø 18	mm	0...9.6
	Ø 30	mm	0...24
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529	IP 65 and IP 67	
	Conforming to DIN 40050	IP 69K	
Storage temperature		°C	-40...+85
Operating temperature		°C	-25...+70
Materials	Case	Nickel plated brass	
	Sensing face	PPS	
	Cable	—	PvR 3 x 0.34 mm ²
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED: 4 viewing ports at 90°	Yellow LED: annular
Rated supply voltage		V	12...48 with protection against reverse polarity
Voltage limits (including ripple)		V	10...58
Switching capacity		mA	≤ 200 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Current consumption, no-load		mA	≤ 10
Maximum switching frequency	XS612B4...	Hz	2500
	XS618B4...	Hz	1000
	XS630B5...	Hz	500
Delays	First-up	ms	≤ 10 for Ø 12 and Ø 18; ≤ 15 for Ø 30
	Response	ms	≤ 0.2 for Ø 12; ≤ 0.3 for Ø 18; ≤ 0.6 for Ø 30
	Recovery	ms	≤ 0.2 for Ø 12; ≤ 0.7 for Ø 18; ≤ 1.4 for Ø 30

Wiring schemes

Connector	Pre-cabled	PNP	NPN
M12 	BU: Blue BN: Brown BK: Black		


Setting-up

Minimum mounting distances (mm)




Side by side

Ø 12	e ≥ 48
Ø 18	e ≥ 72
Ø 30	e ≥ 300




Face to face

e ≥ 84
e ≥ 144
e ≥ 300



Facing a metal object


e ≥ 21
e ≥ 36
e ≥ 90



Mounted in a metal support

d ≥ 36, h ≥ 12
d ≥ 54, h ≥ 18
d ≥ 90, h ≥ 35

Dimensions



XS6	Pre-cabled (mm)			Connector (mm)		
	a	b	c	a	b	c
Ø 12	54	42	5	66	42	5
Ø 18	60	44	8	72	44	8
Ø 30	64	39	13	74	39	13

(1) LED


Inductive proximity sensors

OsiSense XS, general purpose, standard range


Flat format, flush mountable

Two-wire DC


Three-wire DC, solid-state output




XS7J1A1●●L2



XS7J1A1●●L01M8



XS7F1A1●●L2



XS7F1A1●●L01M8

Flat, 8 x 22 x 8 mm format (1) (2)

Three-wire ---

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
2.5	NO	PNP	Pre-cabled (L = 2 m) (3)	XS7J1A1PAL2	0.060
			Remote M8 connector on 0.15 m flying lead	XS7J1A1PAL01M8	0.040
	NPN	NPN	Pre-cabled (L = 2 m) (3)	XS7J1A1NAL2	0.060
			Remote M8 connector on 0.15 m flying lead	XS7J1A1NAL01M8	0.040
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS7J1A1PBL2	0.060
			Remote M8 connector on 0.15 m flying lead	XS7J1A1PBL01M8	0.040
		NPN	Pre-cabled (L = 2 m) (3)	XS7J1A1NBL2	0.060
			Remote M8 connector on 0.15 m flying lead	XS7J1A1NBL01M8	0.040

Two-wire ---

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
2.5	NO		Pre-cabled (L = 2 m) (3)	XS7J1A1DAL2	0.050
			Remote M8 connector on 0.15 m flying lead	XS7J1A1DAL01M8	0.035
	NC		Pre-cabled (L = 2 m) (3)	XS7J1A1DBL2	0.050
			Remote M8 connector on 0.15 m flying lead	XS7J1A1DBL01M8	0.035

Flat, 15 x 32 x 8 mm format (1)

Three-wire ---

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
5	NO	PNP	Pre-cabled (L = 2 m) (3)	XS7F1A1PAL2	0.065
			Remote M8 connector on 0.15 m flying lead	XS7F1A1PAL01M8	0.045
	NPN	NPN	Pre-cabled (L = 2 m) (3)	XS7F1A1NAL2	0.065
			Remote M8 connector on 0.15 m flying lead	XS7F1A1NAL01M8	0.045
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS7F1A1PBL2	0.065
			Remote M8 connector on 0.15 m flying lead	XS7F1A1PBL01M8	0.045
		NPN	Pre-cabled (L = 2 m) (3)	XS7F1A1NBL2	0.065
			Remote M8 connector on 0.15 m flying lead	XS7F1A1NBL01M8	0.045

Two-wire ---

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
5	NO		Pre-cabled (L = 2 m) (3)	XS7F1A1DAL2	0.055
			Remote M8 connector on 0.15 m flying lead	XS7F1A1DAL01M8	0.045
	NC		Pre-cabled (L = 2 m) (3)	XS7F1A1DBL2	0.055
			Remote M8 connector on 0.15 m flying lead	XS7F1A1DBL01M8	0.045

(1) For accessories, see page 3/116.

(2) Sensors **XS7J** include a fixing clamp with screw.

(3) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: **XS7J1A1PAL2** becomes **XS7J1A1PAL5** with a 5 m long cable.

Characteristics

Sensor type		XS7J●●●●●L01M8	XS7F●●●●●L01M8	XS7J●●●●●L2, XS7F●●●●●L2
Product certifications		CE	UL, CSA, CE	
Connection	Connector	Remote M8 connector on 0.15 m flying lead		—
	Pre-cabled	—		Length: 2 m
Operating zone	XS7J	mm	0...2	
	XS7F	mm	0...4	
Differential travel		%	1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529		IP 67 (XS7J), IP 68 (XS7F)	
Storage temperature		°C	-40...+85	
Operating temperature		°C	-25...+70	
Materials	Case		PBT	
	Cable		PvR 3 x 0.11 mm ² or 2 x 0.11 mm ² (XS7F: 2 or 3 x 0.34 mm ²)	
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27		50 gn, duration 11 ms	
Output state indication			Yellow LED	
Rated supply voltage		V	12...24 with protection against reverse polarity	
Voltage limits (including ripple)		V	10...36	
Current consumption, no-load	3-wire	mA	≤ 10	
Residual current, open state	2-wire	mA	≤ 0.5	
Switching capacity	3-wire	mA	100 with overload and short-circuit protection	
	2-wire	mA	1.5...100 with overload and short-circuit protection	
Voltage drop, closed state	3-wire	V	≤ 2	
	2-wire	V	≤ 4	
Maximum switching frequency	3-wire	kHz	2	
	2-wire	kHz	4 for XS7J, 5 for XS7F	
Delays	First-up	ms	Three-wire: 5	
		ms	Two-wire: 10 XS7J, 5 XS7F	
	Response	ms	Three-wire: 0,1	
		ms	Two-wire: 0,5 XS7J, 5 XS7F	
	Recovery	ms	Three-wire: 0,1	
		ms	Two-wire: 1 XS7J, 5 XS7F	

Wiring schemes

Connector	Pre-cabled	PNP NO or NC	NPN NO or NC	2-wire NO
M8 	BU: Blue BN: Brown BK: Black			


Setting-up

Minimum mounting distances (mm)


	Side by side	Face to face	Facing a metal object
XS7J	e ≥ 7.5	e ≥ 20	e ≥ 7.5
XS7F	e ≥ 15	e ≥ 40	e ≥ 15

Dimensions

XS7F



XS7J



(1) LED
(2) For CHC type screws


Inductive proximity sensors

OsiSense XS, general purpose, standard range

Flat format, flush mountable

Two-wire DC

Three-wire DC, solid-state output

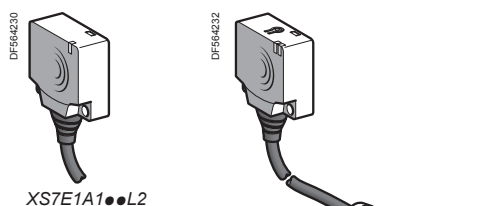


XS7E1A1●●L2




XS7●1A1●L0●M12


XS7E1A1●●M8

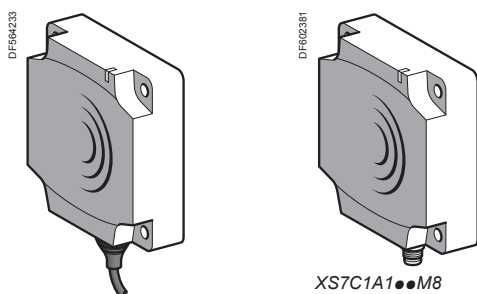


XS7C1A1●●L2




XS7C1A1●●M8

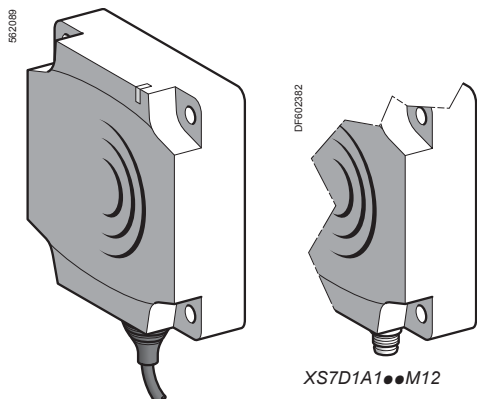


XS7D1A1●●L2



XS7D1A1●●M12

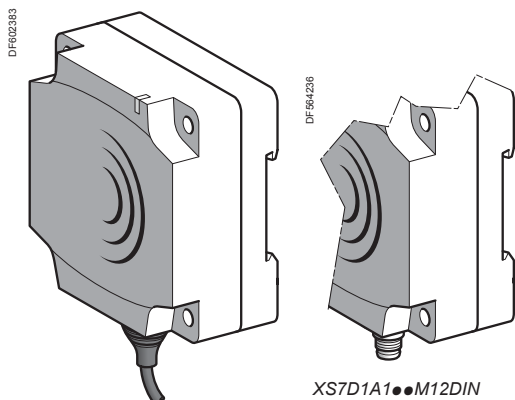

XS7D1A1●●L2DIN



XS7D1A1●●M12DIN

Sens. dist. (Sn) mm	Function	Output	Connection	Reference	Weight kg	
Flat, 26 x 26 x 13 mm format (1)						
Three-wire ---						
10	NO	PNP	Pre-cabled (L = 2 m) (4)	XS7E1A1PAL2	0.075	
			M8 connector	XS7E1A1PAM8	0.040	
			Remote M12 connector	XS7E1A1PAL01M12	0.040	
		NPN	Pre-cabled (L = 2 m) (4)	XS7E1A1NAL2	0.075	
			M8 connector	XS7E1A1NAM8	0.075	
			Remote M12 connector	XS7E1A1NAL01M12	0.040	
	NC	PNP	Pre-cabled (L = 2 m) (4)	XS7E1A1PBL2	0.075	
			M8 connector	XS7E1A1PBM8	0.040	
			Remote M12 connector	XS7E1A1PBL01M12	0.040	
			NPN	Pre-cabled (L = 2 m) (4)	XS7E1A1NBL2	0.075
M8 connector				XS7E1A1NBM8	0.040	
Remote M12 connector				XS7E1A1NBL01M12	0.040	
Two-wire ---						
10	NO		Pre-cabled (L = 2 m) (4)	XS7E1A1DAL2	0.070	
			M8 connector	XS7E1A1DAM8	0.040	
			Remote M12 connector	XS7E1A1DAL01M12	0.040	
	NO terminals 1 and 4 (2)		Remote M12 connector	XS7E1A1CAL01M12	0.040	
			Remote M12 connector (3)	XS7E1A1CAL08M12	0.065	
	NC		Pre-cabled (L = 2 m) (4)	XS7E1A1DBL2	0.070	
			M8 connector	XS7E1A1DBM8	0.040	
			Remote M12 connector	XS7E1A1DBL01M12	0.040	
Flat, 40 x 40 x 15 mm format (1)						
Three-wire ---						
15	NO	PNP	Pre-cabled (L = 2 m) (4)	XS7C1A1PAL2	0.095	
			M8 connector	XS7C1A1PAM8	0.060	
			Remote M12 connector	XS7C1A1PAL01M12	0.060	
		NPN	Pre-cabled (L = 2 m) (4)	XS7C1A1NAL2	0.095	
			M8 connector	XS7C1A1NAM8	0.060	
			Remote M12 connector	XS7C1A1NAL01M12	0.060	
	NC	PNP	Pre-cabled (L = 2 m) (4)	XS7C1A1PBL2	0.095	
			M8 connector	XS7C1A1PBM8	0.060	
			Remote M12 connector	XS7C1A1PBL01M12	0.060	
			NPN	Pre-cabled (L = 2 m) (4)	XS7C1A1NBL2	0.095
M8 connector				XS7C1A1NBM8	0.060	
Remote M12 connector				XS7C1A1NBL01M12	0.060	
Two-wire ---						
15	NO		Pre-cabled (L = 2 m) (4)	XS7C1A1DAL2	0.090	
			M8 connector	XS7C1A1DAM8	0.060	
			Remote M12 connector	XS7C1A1DAL01M12	0.060	
	NO terminals 1 and 4 (2)		Remote M12 connector	XS7C1A1CAL01M12	0.060	
			Remote M12 connector (3)	XS7C1A1CAL08M12	0.090	
	NC		Pre-cabled (L = 2 m) (4)	XS7C1A1DBL2	0.090	
			M8 connector	XS7C1A1DBM8	0.060	
			Remote M12 connector	XS7C1A1DBL01M12	0.060	
Flat, 80 x 80 x 26 mm format (1)						
Three-wire ---						
40	NO	PNP	Pre-cabled (L = 2 m) (4)	XS7D1A1PAL2 (5)	0.340	
			M12 connector	XS7D1A1PAM12 (5)	0.290	
		NPN	Pre-cabled (L = 2 m) (4)	XS7D1A1NAL2 (5)	0.340	
			M12 connector	XS7D1A1NAM12 (5)	0.290	
	NC	PNP	Pre-cabled (L = 2 m) (4)	XS7D1A1PBL2 (5)	0.340	
			M12 connector	XS7D1A1PBM12 (5)	0.290	
			NPN	Pre-cabled (L = 2 m) (4)	XS7D1A1NBL2 (5)	0.340
				M12 connector	XS7D1A1NBM12 (5)	0.290
Two-wire ---						
40	NO		Pre-cabled (L = 2 m) (4)	XS7D1A1DAL2 (5)	0.340	
			M12 connector	XS7D1A1DAM12 (5)	0.290	
	NO terminals 1 and 4 (2)		M12 connector	XS7D1A1CAM12 (5)	0.290	
		NC		Pre-cabled (L = 2 m) (4)	XS7D1A1DBL2 (5)	0.340
			M12 connector	XS7D1A1DBM12 (5)	0.290	

(1) For accessories, see page 3/116.

(2) The NO output is connected to terminals 1 and 4 of the M12 connector.

(3) Remote connector on 0.8 m flying lead.







(4) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

 Example: **XS7J1A1PAL2** becomes **XS7J1A1PAL5** with a 5 m long cable.

 (5) For clipping onto 35 mm omega rail or 80 x 80 x 40 mm format, add DIN to the end of the reference. Example: **XS7D1A1PAL2** becomes **XS7D1A1PAL2DIN**.




Characteristics				
Sensor type		XS7E●●●●●M8, XS7C●●●●●M8, XS7D●●●●●M12	XS7E●●●●●L01M12, XS7C●●●●●L01M12	XS7E●●●●●L2, XS7C●●●●●L2, XS7D●●●●●L2
Product certifications		UL, CSA, CE, ECOLAB		
Connection	Connector	M8 except M12 on XS7D●●●●●M12	M12 on 0.15 m flying lead for XS7●●●●●L01M12	—
	Pre-cabled	—	—	Length: 2 m
Operating zone	XS7E	mm	0...8	
	XS7C	mm	0...12	
	XS7D	mm	0...32	
Differential travel		%	1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529		IP 67, double insulation □ (except for M8 connector: IP 67)	
Storage temperature		°C	- 40...+ 85	
Operating temperature		°C	- 25...+ 70	
Materials	Case		PBT	
	Cable		—	
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27		50 gn, duration 11 ms	
Output state indication			Yellow LED	
Rated supply voltage		V	12...24 with protection against reverse polarity	
Voltage limits (including ripple)		V	10...36	
Current consumption, no-load	3-wire	mA	≤ 10	
Residual current, open state	2-wire	mA	≤ 0.5	
Switching capacity	3-wire	mA	≤ 100 with overload and short-circuit protection	
	2-wire	mA	1.5...100 with overload and short-circuit protection	
Voltage drop, closed state	3-wire	V	≤ 2	
	2-wire	V	≤ 4	
Maximum switching frequency	XS7E, XS7C	kHz	1	
	XS7D	Hz	100	
Delays	First-up	3-wire	ms 10 XS7E and XS7C, 30 XS7D	
		2-wire	ms 5 XS7E and XS7D, 10 XS7D	
	Response	3-wire	ms 2 XS7E and XS7C, 5 XS7D	
		2-wire	ms 0,3 XS7E and XS7D, 10 XS7D	
	Recovery	3-wire	ms 6 XS7E, 5 XS7C, 35 XS7D	
		2-wire	ms 0,7 XS7E and XS7D, 10 XS7D	

Wiring schemes

Connector	Pre-cabled	PNP/M12 or M8	2-wire NO/M12 or M8	2-wire NC/M12 or M8
M12 M8 	BU: Blue BN: Brown BK: Black			
		NPN/M12 or M8	2-wire NO/M12 XS7●●●●●CA●●●	
				For M8 connector, NO and NC outputs on terminal 4

Setting-up

Minimum mounting distances (mm)

Side by side	e ≥	XS7E	XS7C	XS7D
		30	45	120
Face to face	e ≥	XS7E	XS7C	XS7D
		72	110	300
Facing a metal object	e ≥	XS7E	XS7C	XS7D
		30	45	120

Dimensions

XS7C/D/E

XS7C/D

XS7E

(1) LED

(2) For CHC type screws


Sensor	A (cable)	A (connector)	B	C	D	E	F
XS7E	14	11	26	13	8.8	20	3.5
XS7C	14	11	40	15	9.8	33	4.5
XS7D	23	18	80	26	16	65	5.5
XS7D●●DIN	23	18	80	40	30	65	5.1


Inductive proximity sensors

OsiSense XS, general purpose

Cubic case, 40 x 40 x 70 mm, M12 or 1/2"-20UNF
connector

5 position turret head



Sensor	Flush mountable in metal		Non flush mountable in metal	
				
Nominal sensing distance (Sn)	15 mm	20 mm	40 mm	
References				
4-wire ---	PNP NO+NC	–	XS8C2A1PCM12	XS8C2A4PCM12
	NPN NO+NC	–	XS8C2A1NCM12	XS8C2A4NCM12
3-wire ---	PNP NO	XS7C2A1PAM12	–	–
	NPN NO	XS7C2A1NAM12	–	–
	PNP NC	XS7C2A1PBM12	–	–
	NPN NC	XS7C2A1NBM12	–	–
2-wire ---	NO	XS7C2A1DAM12	XS8C2A1DAM12	XS8C2A4DAM12
	NC	XS7C2A1DBM12	XS8C2A1DBM12	XS8C2A4DBM12
2-wire (~/---) unprotected (1)	NO	XS7C2A1MAU20	XS8C2A1MAU20	XS8C2A4MAU20
	NC	XS7C2A1MBU20	XS8C2A1MBU20	XS8C2A4MBU20
Weight (kg)	0.149	0.149	0.149	
Characteristics				
Operating zone	0...12 mm	0...16 mm	0...32 mm	
Product certifications	UL, CSA, CE, TÜV (4-wire), E2 (3-wire and 4-wire)			
Conformity to standards	IEC 60947-5-2			
Conformity to safety standards (2)	For XS8C2A●PCM12	EN 62061 (2005): SILcl2 EN 61508 (2010): SIL 2, EN ISO 13849 (2008): PL d		
Reliability data (2)	For XS8C2A●PCM12	MTTFd = 1546 years PFHd = 7.4 10-8 1/h		
Connection	M12 connector for --- versions 1/2"-20UNF connector for ~/--- versions			
Differential travel	3...15% of Sr			
Degree of protection	Conforming to IEC 60529 and DIN 40050	IP 65, IP 67 and IP 69K		
Temperature	Storage Operation (3)	- 40...+ 85°C - 25...+ 70°C		
Material	Case: PBT			
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10...55 Hz)		
Shock resistance	Conforming to IEC 60068-2-27	50 gn for 11 ms		
Indicators	Output state Power on	Yellow LED Green LED, for 4-wire ---, 3-wire --- and 2-wire ~/--- versions		
Rated supply voltage	4-wire ---	12...48 V with protection against reverse polarity		
	3-wire ---	12...24 V with protection against reverse polarity		
	2-wire ---	12...48 V with protection against reverse polarity		
	2-wire ~/---	24...240 V (~ 50/60 Hz)		
Voltage limits (including ripple)	4-wire ---	10...58 V		
	3-wire ---	10...36 V		
	2-wire ---	10...58 V		
	2-wire ~/---	20...264 V		
Current consumption, no-load	3-wire and 4-wire ---	< 15 mA		
Residual current, open state	2-wire ---	< 0.6 mA		
	2-wire ~/---	1.5 mA		
Switching capacity	3-wire and 4-wire ---	< 200 mA with overload and short-circuit protection		
	2-wire ---	< 100 mA with overload and short-circuit protection		
	2-wire ~/---	~: 5...300 mA (1) ---: 5...200 mA (1)		
Voltage drop, closed state	3-wire and 4-wire ---	< 2 V		
	2-wire ---	< 4.2 V		
	2-wire ---/~	< 5.5 V		
Maximum switching frequency	Flush mountable: --- 300 Hz, ~ 25 Hz Non flush mountable: --- 150 Hz, ~ 25 Hz			
Delays	First-up	7 ms (3-wire and 4-wire ---), 20 ms (2-wire --- and 2-wire ---/~)		
	Response	Flush mountable: ≤ 1.2 ms. Non flush mountable: ≤ 1.4 ms		
	Recovery	Flush mountable: ≤ 1.8 ms. Non flush mountable: ≤ 3.5 ms		

(1) Sensor must be protected by a 0.4 A quick-blow fuse (reference **XUZE04**) connected in series with the load.

(2) SIL 2 protection can only be obtained by connecting both outputs to a safety PLC. Please refer to the "Safety solutions using Preventa" catalogue.



(3) Sensors are available for very low temperatures (suffix **TF**: - 40°C, + 70°C) or very high temperatures (suffix **TT**: - 25°C, + 85°C). Please consult our Customer Care Centre.

Inductive proximity sensors

OsiSense XS, general purpose
Cubic case, 40 x 40 x 70 mm, M12 or 1/2"-20UNF
connector
5 position turret head



Setting-up precautions

Minimum mounting distances (mm)


				
Sensors flush mountable in metal	XS7C2A1●●	$e \geq 60$	$e \geq 120$	$e \geq 45$
	XS8C2A1●●	$e \geq 80$	$e \geq 160$	$e \geq 60$
Sensors non flush mountable in metal	XS8C2A4●●	$e \geq 160$	$e \geq 320$	$e \geq 120$

Wiring schemes


4-wire $\overline{\text{NPN}}$, NO + NC outputs




3-wire, PNP




3-wire, NPN




2-wire, 1/2"-20UNF




2-wire $\overline{\text{NPN}}$, NO output (M12 connector)




2-wire $\overline{\text{NPN}}$, NC output (M12 connector)



M12 connector




1/2"-20UNF connector




Accessory references

Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin, zinc die-cast, nickel plated clamping ring	Straight	2	XZCP1141L2	0.090
		5	XZCP1141L5	0.190
		10	XZCP1141L10	0.370
	Elbowed	2	XZCP1241L2	0.090
		5	XZCP1241L5	0.190
		10	XZCP1241L10	0.370
Pre-wired 1/2"-20UNF connectors Female, 3-pin, zinc die-cast, nickel plated clamping ring	Straight	5	XZCP1865L5	0.180
		10	XZCP1865L10	0.350
		10	XZCP1965L10	0.350
	Elbowed	5	XZCP1965L5	0.180
		10	XZCP1965L10	0.350
		10	XZCP1965L10	0.350


Dimensions

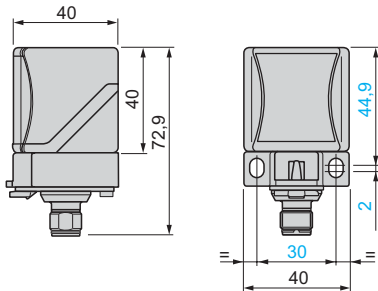

Head positions

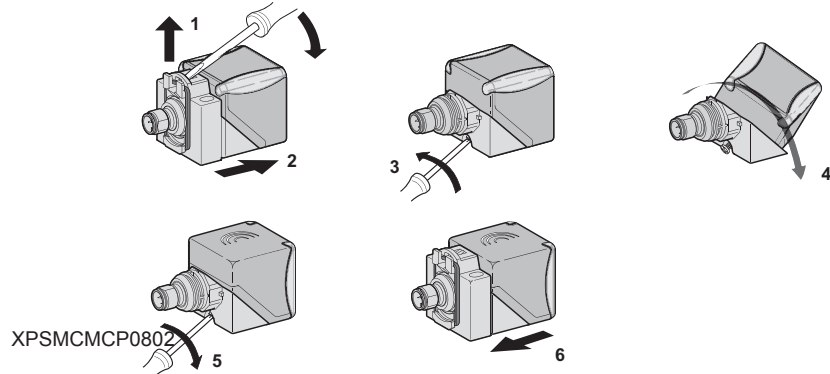

Example SIL 2 wiring scheme (with Preventa XPSMCMCP0802 safety PLC)

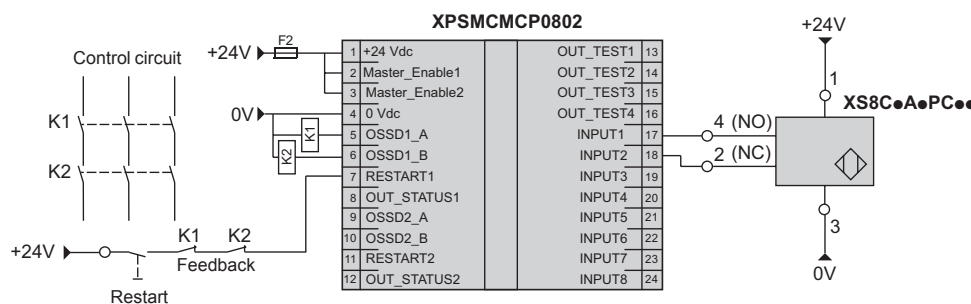

SFF (Safe Failure Fraction): 92,68 %
DC (Diagnosis Coverage): 75,8 %


Inductive proximity sensors

OsiSense XS, general purpose

Plastic case, 40 x 40 x 117 mm, plug-in

5 position turret head

Sensor	Flush mountable in metal	Non flush mountable in metal
--------	--------------------------	------------------------------



Nominal sensing distance (Sn)	15 mm	20 mm	40 mm
-------------------------------	-------	-------	-------

References

4-wire ---	PNP NO+NC	—	XS8C4A1PCP20	XS8C4A4PCP20
	NPN NO+NC	—	XS8C4A1NCP20	XS8C4A4NCP20
2-wire ---	NO or NC programmable	XS7C4A1DPP20	XS8C4A1DPP20	XS8C4A4DPP20
2-wire $(\sim/\text{---})$ unprotected (1)	NO or NC programmable	XS7C4A1MPP20	XS8C4A1MPP20	XS8C4A4MPP20
Weight (kg)		0.244	0.244	0.244

Note: These sensors have an M20 cable entry. They can also be supplied with a PG 13.5 cable entry (e.g. XS8C4A4PCG13) or a 1/2" NPT cable entry (e.g. XS8C4A1MPN12). Please consult our Customer Care Centre.

Characteristics

Operating zone		0...12 mm	0...16 mm	0...32 mm
Product certifications		UL, CSA, CE, TÜV (4-wire), E2 (4-wire)		
Conformity to standards		IEC 60947-5-2		
Conformity to safety standards (2)	For XS8C4A●PCP20	EN 62061 (2005): SILcl2, EN 61508 (2010): SIL 2, EN ISO 13849 (2008): PL d		
Reliability data (2)	For XS8C4A●PCP20	MTTFd = 1546 years PFHd = 7.4 10 ⁻⁸ 1/h		
Connection		Screw terminals, clamping capacity: 2 or 4 x 1.5 mm ² / 2 or 4 x 16 AWG (3)		
Differential travel		3...15% of Sr		
Degree of protection	Conforming to IEC 60529 and DIN 40050	IP 65, IP 67 and IP 69K		
Temperature	Storage	- 40...+ 85°C		
	Operation (4)	- 25...+ 70°C		
Material		Case: PBT		
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude $\pm$ 2 mm (f = 10...55 Hz)		
Shock resistance	Conforming to IEC 60068-2-27	50 gn for 11 ms		
Indicators	Output state	Yellow LED		
	Power on	Green LED, for 4-wire --- and 2-wire $\sim/\text{---}$ versions		
Rated supply voltage	4-wire ---	12...48 V with protection against reverse polarity		
	2-wire ---	12...48 V with protection against reverse polarity		
	2-wire $\sim/\text{---}$	24...240 V ($\sim$ 50/60 Hz)		
Voltage limits (including ripple)	4-wire ---	10...58 V		
	2-wire ---	10...58 V		
	2-wire $\sim/\text{---}$	20...264 V		
Current consumption, no-load	4-wire ---	< 15 mA		
Residual current, open state	2-wire ---	< 0.6 mA		
	2-wire $\sim/\text{---}$	1.5 mA		
Switching capacity	4-wire ---	< 200 mA with overload and short-circuit protection		
	2-wire ---	< 100 mA with overload and short-circuit protection		
	2-wire $\sim/\text{---}$	$\sim$: 5...300 mA (1) --- : 5...200 mA (1)		
Voltage drop, closed state	4-wire ---	< 2 V		
	2-wire ---	< 4.2 V		
	2-wire $\text{---}/\sim$	< 5.5 V		
Maximum switching frequency		Flush mountable: --- 300 Hz, $\sim$ 25 Hz Non flush mountable: --- 150 Hz, $\sim$ 25 Hz		
Delays	First-up	7 ms (3-wire and 4-wire ---), 20 ms (2-wire --- and 2-wire $\text{---}/\sim$)		
	Response	Flush mountable: $\leq$ 1.2 ms. Non flush mountable: $\leq$ 1.4 ms		
	Recovery	Flush mountable: $\leq$ 1.8 ms. Non flush mountable: $\leq$ 3.5 ms		

(1) Sensor must be protected by a 0.4 A quick-blow fuse (reference XUZE04) connected in series with the load.

(2) SIL 2 protection can only be obtained by connecting both outputs to a safety PLC. Please refer to the "Safety solutions using Preventa" catalogue.

(3) These sensors are supplied without a cable gland. An adaptable PG 13.5 cable gland is available (reference XSZPE13). Accessories are available for connection to an M12 or 7/8"-16UN connector which can be added to the PG 13.5 sensor. Please consult our Customer Care Centre.

(4) Sensors are available for very low temperatures (suffix TF: - 40°C, + 70°C) or very high temperatures (suffix TT: - 25°C, + 85°C). Please consult our Customer Care Centre.

Inductive proximity sensors

OsiSense XS, general purpose

Plastic case, 40 x 40 x 117 mm, plug-in

5 position turret head

Setting-up precautions


Minimum mounting distances (mm)

		Side by side	Face to face	Facing a metal object
Sensors flush mountable in metal	XS7C4A1●●	$e \geq 60$	$e \geq 120$	$e \geq 45$
	XS8C4A1●●	$e \geq 80$	$e \geq 160$	$e \geq 60$
Sensors non flush mountable in metal	XS8C4A4●●	$e \geq 160$	$e \geq 320$	$e \geq 120$


Wiring schemes

NO + NC outputs


4-wire ...




NO or NC outputs, depending on position of link




2-wire ... (non polarised)




2-wire ~ or ... (programmable)



Dimensions

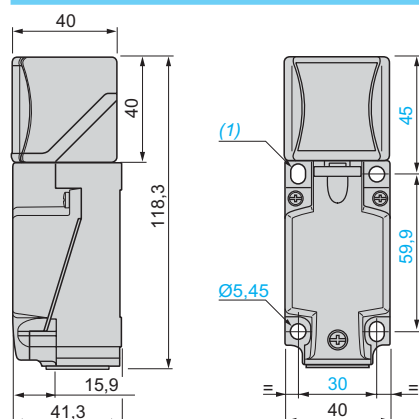


Head positions

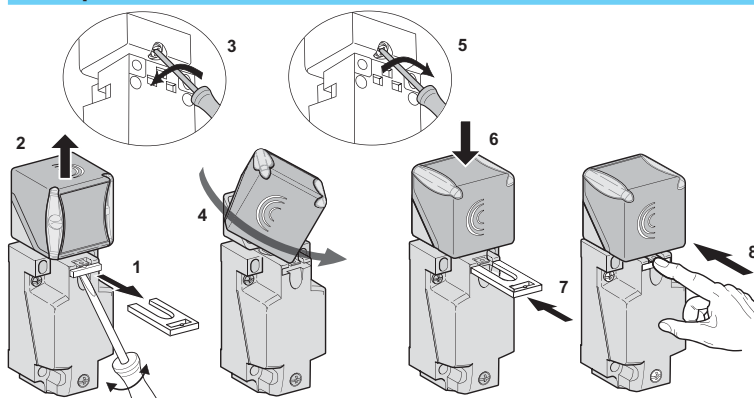

(1) 2 elongated holes Ø 5.3 x 7 cm.

Tightening torque of cover fixing screws and clamp screws: < 1.2 N.m / < 10.62 lb-in

Example SIL 2 wiring scheme (with Preventa XPSMCMCP0802 safety PLC)

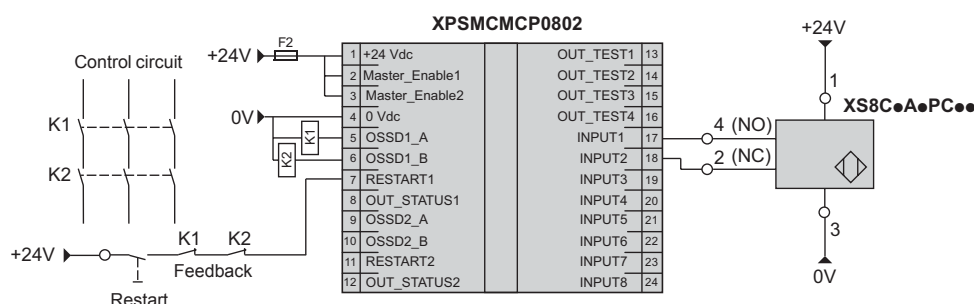

SFF (Safe Failure Fraction): 92,68 %


DC (Diagnosis Coverage): 75,8 %

Inductive proximity sensors


OsiSense XS, general purpose

Multivoltage sensor, cylindrical, flush mountable
and non flush mountable


Two-wire AC or DC, short-circuit protection




XS1M●●●●250

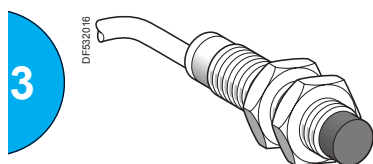


XS2M●●●●250



XS1M●●●●250K



XS2M●●●●250K



XSZB1●●

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
Ø 12, threaded M12 x 1				
Flush mountable				
2	NO	Pre-cabled (L = 2 m) (1) 1/2"-20UNF connector	XS1M12MA250 XS1M12MA250K	0.075 0.025
	NC	Pre-cabled (L = 2 m) (1) 1/2"-20UNF connector	XS1M12MB250 XS1M12MB250K	0.075 0.025
Non flush mountable				
4	NO	Pre-cabled (L = 2 m) (1) 1/2"-20UNF connector	XS2M12MA250 XS2M12MA250K	0.075 0.025
	NC	Pre-cabled (L = 2 m) (1)	XS2M12MB250	0.075
Ø 18, threaded M18 x 1				
Flush mountable				
5	NO	Pre-cabled (L = 2 m) (1) 1/2"-20UNF connector	XS1M18MA250 XS1M18MA250K	0.120 0.060
	NC	Pre-cabled (L = 2 m) (1) 1/2"-20UNF connector	XS1M18MB250 XS1M18MB250K	0.120 0.060
Non flush mountable				
8	NO	Pre-cabled (L = 2 m) (1) 1/2"-20UNF connector	XS2M18MA250 XS2M18MA250K	0.120 0.060
	NC	Pre-cabled (L = 2 m) (1) 1/2"-20UNF connector	XS2M18MB250 XS2M18MB250K	0.120 0.060
Ø 30, threaded M30 x 1.5				
Flush mountable				
10	NO	Pre-cabled (L = 2 m) (1) 1/2"-20UNF connector	XS1M30MA250 XS1M30MA250K	0.205 0.145
	NC	Pre-cabled (L = 2 m) (1) 1/2"-20UNF connector	XS1M30MB250 XS1M30MB250K	0.205 0.145
Non flush mountable				
15	NO	Pre-cabled (L = 2 m) (1) 1/2"-20UNF connector	XS2M30MA250 XS2M30MA250K	0.205 0.145
	NC	Pre-cabled (L = 2 m) (1) 1/2"-20UNF connector	XS2M30MB250 XS2M30MB250K	0.205 0.145
Accessories (2)				
Description mm			Reference	Weight kg
Fixing clamps	Ø 12		XSZB112	0.006
	Ø 18		XSZB118	0.010
	Ø 30		XSZB130	0.020

(1) For a 5 m long cable add L1 to the reference; for a 10 m long cable add L2 to the reference.

Example: XS1M18MA250 becomes XS1M18MA250L1 with a 5 m long cable.

(2) For further information, see page 3/116.

Characteristics				
Sensor type		XS●M●●M●250K		XS●M●●M●250
Product certifications		UL, CSA, CEC		
Connection		1/2"-20UNF connector		Pre-cabled, length: 2 m
Operating zone	Ø 12 flush mountable	mm	0...1.6	
	Ø 12 non flush mountable	mm	0...3.2	
	Ø 18 flush mountable	mm	0...4	
	Ø 18 non flush mountable	mm	0...6.4	
	Ø 30 flush mountable	mm	0...8	
	Ø 30 non flush mountable	mm	0...12	
Differential travel		%	1...15 of effective sensing distance (Sr)	
Degree of protection		Conforming to IEC 60529	IP 67	IP 68, double insulation
Storage temperature		°C	- 40...+ 85	
Operating temperature		°C	- 25...+ 70	
Materials	Case		Nickel plated brass	
	Cable		PvR 2 x 0.34 mm ²	
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Indicators	Output state		Yellow LED, 4 viewing ports at 90°	Yellow LED
	Supply on		–	Green LED (only on Ø 18 and Ø 30)
Rated supply voltage		V	~ 24...240 (50/60 Hz) or --- 24...210	
Voltage limits (including ripple)		V	~ or --- 20...264	
Switching capacity		mA	~ 5...300 or --- 5...200 (except Ø 12: ~ or --- 5...200) with overload and short-circuit protection	
Voltage drop, closed state		V	≤ 5.5	
Current consumption, no-load		mA	–	
Residual current, open state		mA	≤ 1.5	
Maximum switching frequency	Ø 12	Hz	~ 25 or --- 4000	
	Ø 18	Hz	~ 25 or --- 2000	
	Ø 30 flush mountable	Hz	~ 25 or --- 2000	
	Ø 30 non flush mountable	Hz	~ 25 or --- 1000	
Delays	First-up	ms	≤ 70	
	Response	ms	≤ 0.2 for Ø 12, ≤ 2 for Ø 18 and Ø 30	
	Recovery	ms	≤ 0.2 for Ø 12, ≤ 4 for Ø 18, ≤ 5 for Ø 30 flush mountable, ≤ 10 for Ø 30 non flush mountable	

Wiring schemes

1/2"-20UNF connector




Pre-cabled

BU: Blue
BN: Brown

2-wire ~ or ---

NO or NC output




± : on connector models only.

Setting-up

Sensor	Minimum mounting distances (mm)			
	Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 12 flush mountable	e ≥ 4	e ≥ 24	e ≥ 6	d ≥ 12 h ≥ 0
Ø 12 non flush mountable	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36 h ≥ 8
Ø 18 flush mountable	e ≥ 10	e ≥ 60	e ≥ 15	d ≥ 18 h ≥ 0
Ø 18 non flush mountable	e ≥ 16	e ≥ 96	e ≥ 24	d ≥ 54 h ≥ 16
Ø 30 flush mountable	e ≥ 20	e ≥ 120	e ≥ 30	d ≥ 30 h ≥ 0
Ø 30 non flush mountable	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90 h ≥ 30

Dimensions




Sensor	Flush mountable in metal					Non flush mountable in metal				
	Pre-cabled		Connector		c	Pre-cabled		Connector		c
	a	b	a	b		a	b	a	b	
Ø 12	57	42	66	48	5	57	42	66	42	5
Ø 18	60	51	72	51	8	60	44	72	44	8
Ø 30	60	51	72	51	13	63	41	75	41	13

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, metal and plastic, flush mountable
and non flush mountable


Four-wire DC, solid-state NO + NC output




XS1L06●C410



XS1●●●●C410



XS2●●●●C410



XS1N●●●C410D

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
--------------------------	----------	--------	------------	-----------	-----------

Ø 6.5 plain

Stainless steel case, flush mountable

1.5	NO + NC	PNP	Pre-cabled (L = 2 m)	XS1L06PC410	0.025
		NPN	Pre-cabled (L = 2 m)	XS1L06NC410	0.025

Ø 8, threaded M8 x 1

Stainless steel case, flush mountable

1.5	NO + NC	PNP	Pre-cabled (L = 2 m)	XS1M08PC410	0.035
			M12 connector	XS1M08PC410D	0.025
		NPN	Pre-cabled (L = 2 m)	XS1M08NC410	0.035
			M12 connector	XS1M08NC410D	0.025

Stainless steel case, non flush mountable

2.5	NO + NC	PNP	Pre-cabled (L = 2 m) (1)	XS2M08PC410	0.035
			M12 connector	XS2M08PC410D	0.025
		NPN	Pre-cabled (L = 2 m)	XS2M08NC410	0.035
			M12 connector	XS2M08NC410D	0.025

Plastic case, non flush mountable

2.5	NO + NC	PNP (3)	Pre-cabled (L = 2 m) (1)	XS4P08PC410	0.035
-----	---------	---------	--------------------------	--------------------	-------

Ø 12, threaded M12 x 1

Brass case, flush mountable

2	NO + NC	PNP	Pre-cabled (L = 2 m) (1) (2)	XS1N12PC410	0.070
			M12 connector	XS1N12PC410D	0.020
		NPN	Pre-cabled (L = 2 m) (1)	XS1N12NC410	0.070
			M12 connector	XS1N12NC410D	0.020

Plastic case, non flush mountable

4	NO + NC	PNP (3)	Pre-cabled (L = 2 m) (1)	XS4P12PC410	0.070
			M12 connector	XS4P12PC410D	0.020

(1) For a 5 m long cable add **L1** to the reference. Example: **XS1N12PC410** becomes **XS1N12PC410L1** with a 5 m long cable.

(2) For a 10 m long cable add **L2** to the reference. Example: **XS1N12PC410** becomes **XS1N12PC410L2** with a 10 m long cable.


(3) These sensors can be supplied in NPN versions. Please contact our Customer Care Centre.

Inductive proximity sensors


OsiSense XS, general purpose

Cylindrical, metal and plastic, flush mountable
and non flush mountable


Four-wire DC, solid-state NO + NC output




XS18C410



XS18C410D



XS30C410



XSZB100

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 18, threaded M18 x 1					
Brass case, flush mountable					
5	NO + NC	PNP	Pre-cabled (L = 2 m) (1) (2)	XS1N18PC410	0.100
			M12 connector	XS1N18PC410D	0.040
	NPN	Pre-cabled (L = 2 m)	XS1N18NC410	0.100	
		M12 connector	XS1N18NC410D	0.040	
Plastic case, non flush mountable					
8	NO + NC	PNP (3)	Pre-cabled (L = 2 m)	XS4P18PC410	0.100
			M12 connector	XS4P18PC410D	0.040
Ø 30, threaded M30 x 1.5					
Brass case, flush mountable					
10	NO + NC	PNP	Pre-cabled (L = 2 m) (1) (2)	XS1N30PC410	0.160
			M12 connector	XS1N30PC410D	0.100
	NPN	Pre-cabled (L = 2 m)	XS1N30NC410	0.160	
		M12 connector	XS1N30NC410D	0.100	
Plastic case, non flush mountable					
15	NO + NC	PNP (3)	Pre-cabled (L = 2 m)	XS4P30PC410	0.160
			M12 connector	XS4P30PC410D	0.100
Accessories (4)					
Description				Reference	Weight kg
Fixing clamps		Ø 8		XSZB108	0.006
		Ø 12		XSZB112	0.006
		Ø 18		XSZB118	0.010
		Ø 30		XSZB130	0.020

(1) For a 5 m long cable add **L1** to the reference. Example: **XS1N18PC410** becomes **XS1N18PC410L1** with a 5 m long cable.

(2) For a 10 m long cable add **L2** to the reference. Example: **XS1N18PC410** becomes **XS1N18PC410L2** with a 10 m long cable.

(3) These sensors can be supplied in NPN versions. Please contact our Customer Care Centre.

(4) For further information, see page 3/116.

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, metal and plastic, flush mountable
and non flush mountable

Four-wire DC, solid-state NO + NC output

Characteristics						
Sensor type			XS●●●●PC410D	XS●●●●NC410D	XS●●●●PC410	XS●●●●NC410
Product certifications	Ø 6.5 and Ø 8		UL, CSA, CÉ			
	Ø 12, Ø 18 and Ø 30		UL, CSA, CÉ, E2 (1)	UL, CSA, CÉ	UL, CSA, CÉ, E2 (2)	UL, CSA, CÉ
Conformity to safety standards	Ø 6.5 and Ø 8		–			
	Ø 12, Ø 18 and Ø 30		EN/IEC 61508: SIL 2 EN/ISO 13849-1: PL =d IEC 62061: SILcl2 (3)	–	EN/IEC 61508: SIL 2 EN/ISO 13849-1: PL =d IEC 62061: SILcl2 (4)	–
Reliability data	Ø 12, Ø 18 and Ø 30		MTTFd = 1810 years, PFHd = 69.9 10 ⁻⁹ 1/h, SFF > 92 %, DC > 75 % (with a safety controller) (3)	–	MTTFd = 1810 years, PFHd = 69.9 10 ⁻⁹ 1/h, SFF > 92 %, DC > 75 % (with a safety controller) (4)	–
Connection			M12 connector		Pre-cabled, length: 2 m	
Operating zone	Ø 6.5 and Ø 8 flush mountable	mm	0...1.2			
	Ø 8 non flush mountable	mm	0...2			
	Ø 12 flush mountable	mm	0...1.6			
	Ø 12 non flush mountable	mm	0...3.2			
	Ø 18 flush mountable	mm	0...4			
	Ø 18 non flush mountable	mm	0...6.4			
	Ø 30 flush mountable	mm	0...8			
	Ø 30 non flush mountable	mm	0...12			
Differential travel		%	1...15 of effective sensing distance (Sr)			
Degree of protection	Conforming to IEC 60529		IP 65 and IP 67	IP 67	IP 67, double insulation (Ø 6.5 and Ø 8) IP 68, double insulation (Ø 12, Ø 18 and Ø 30)	
	Conforming to DIN 40050		IP 69K (Ø 12, Ø 18 and Ø 30)	–	–	
Storage temperature		°C	- 40...+ 85			
Operating temperature		°C	- 25...+ 70 (5)			
Materials	Case		Nickel plated brass for XS1N●●●. Stainless steel 303 for XS1M08●●● and XS2M08●●●. Plastic, PPS, for XS4P●●●.			
	Cable		–		PvR 4 x 0.08 mm² (Ø 6.5 and Ø 8) PvR 4 x 0.22 mm² (Ø 12, Ø 18 and Ø 30)	
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)			
Shock resistance	Conforming to IEC 60068-2-27		50 gn, duration 11 ms			
Output state indication			Yellow LED, 4 viewing ports at 90°		Yellow LED, annular	
Rated supply voltage		V	--- 12...24 with protection against reverse polarity			
Voltage limits (including ripple)		V	--- 9...36 (--- 10...36 for XS4P●●●)	--- 10...36	--- 9...36 (--- 10...36 for XS4P18●●●)	--- 10...36
Switching capacity		mA	≤ 200 with overload and short-circuit protection			
Voltage drop, closed state		V	≤ 2			
Current consumption, no-load		mA	≤ 10			
Maximum switching frequency	Ø 6.5, Ø 8 and Ø 12	Hz	5000			
	Ø 18	Hz	2000			
	Ø 30	Hz	1000			
Delays	First-up	ms	≤ 5			
	Response	ms	≤ 0.1 for Ø 8 and Ø 12, ≤ 0.15 for Ø 18, ≤ 0.3 for Ø 30			
	Recovery	ms	≤ 0.1 for Ø 8 and Ø 12, ≤ 0.35 for Ø 18, ≤ 0.7 for Ø 30			

(1) Except XS4P●●●: UL, CSA and CÉ.

(2) Except XS4P18●●●: UL, CSA and CÉ.

(3) Except XS4P●●●.

(4) Except XS4P18●●●.

(5) Sensors are available for very low temperatures (suffix TF: -40°C, + 70°C) or very high temperatures (suffix TT: - 25°C, + 85°C). Please consult our Customer Care Centre.

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, metal and plastic, flush mountable
and non flush mountable

Four-wire DC, solid-state NO + NC output

Wiring schemes


M12 connector




Pre-cabled

BU: Blue
BN: Brown
BK: Black
WH: White

PNP 4-wire



NPN 4-wire




Setting-up

Minimum mounting distances (mm)

Sensor	Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 6.5 flush mountable XS1L06	$e \geq 3$	$e \geq 18$	$e \geq 4.5$	$d \geq 6.5 \ h \geq 0$
Ø 8 flush mountable XS1M08	$e \geq 3$	$e \geq 18$	$e \geq 4.5$	$d \geq 8 \ h \geq 0$
Ø 8 non flush mountable XS4P08	$e \geq 10$	$e \geq 30$	$e \geq 7.5$	$d \geq 24 \ h \geq 5$
Ø 12 flush mountable XS1N12	$e \geq 4$	$e \geq 24$	$e \geq 6$	$d \geq 12 \ h \geq 0$
Ø 12 non flush mountable XS4P12	$e \geq 16$	$e \geq 48$	$e \geq 12$	$d \geq 36 \ h \geq 8$
Ø 18 flush mountable XS1N18	$e \geq 10$	$e \geq 60$	$e \geq 15$	$d \geq 18 \ h \geq 0$
Ø 18 non flush mountable XS4P18	$e \geq 16$	$e \geq 96$	$e \geq 24$	$d \geq 54 \ h \geq 16$
Ø 30 flush mountable XS1N30	$e \geq 20$	$e \geq 120$	$e \geq 30$	$d \geq 30 \ h \geq 0$
Ø 30 non flush mountable XS4P30	$e \geq 60$	$e \geq 180$	$e \geq 45$	$d \geq 90 \ h \geq 30$

Dimensions



Flush mountable in metal

Sensor	Pre-cabled (mm)		M12 connector (mm)	
	a	b	a	b
Ø 6.5 stainless steel XS1L06	50	—	—	—
Ø 8 stainless steel XS1M08	51	42	62	40
Ø 12 brass XS1N12	37	25	50	31
Ø 18 brass XS1N18	41	29	51	28
Ø 30 brass XS1N30	45	33	54	33

Non flush mountable in metal

Sensor	Pre-cabled (mm)		M12 connector (mm)	
	a	b	a	b
Ø 8 stainless steel XS2M08	54	42	65	40
Ø 8 plastic XS4P08	34	25	—	—
Ø 12 plastic XS4P12	37	25	50	31
Ø 18 plastic XS4P18	41	29	51	28
Ø 30 plastic XS4P30	45	33	54	33


Inductive proximity sensors

OsiSense XS, general purpose


Cylindrical, metal and plastic, flush and non flush mountable

Four-wire DC, solid-state PNP + NPN NO/NC


programmable output




XS1M●●KP340
XS4P●●KP340

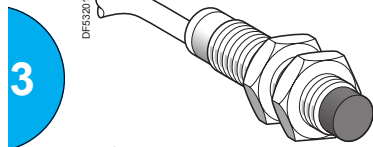


XS2M●●KP340



XS1M●●KP340D
XS4P●●KP340D



XS2M●●KP340D



XSZB1●●

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 12, threaded M12 x 1					
Metal case, flush mountable					
2	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS1M12KP340	0.075
			M12 connector	XS1M12KP340D	0.025
Metal case, non flush mountable					
4	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS2M12KP340	0.075
			M12 connector	XS2M12KP340D	0.025
Plastic case, non flush mountable					
4	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS4P12KP340	0.075
			M12 connector	XS4P12KP340D	0.025
Ø 18, threaded M18 x 1					
Metal case, flush mountable					
5	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS1M18KP340	0.120
			M12 connector	XS1M18KP340D	0.060
Metal case, non flush mountable					
8	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS2M18KP340	0.120
			M12 connector	XS2M18KP340D	0.060
Plastic case, non flush mountable					
8	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS4P18KP340	0.120
			M12 connector	XS4P18KP340D	0.060
Ø 30, threaded M30 x 1.5					
Metal case, flush mountable					
10	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS1M30KP340	0.205
			M12 connector	XS1M30KP340D	0.145
Metal case, non flush mountable					
15	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS2M30KP340	0.205
			M12 connector	XS2M30KP340D	0.145
Plastic case, non flush mountable					
15	NO/NC programmable	PNP + NPN	Pre-cabled (L = 2 m) (1)	XS4P30KP340	0.205
			M12 connector	XS4P30KP340D	0.145
Accessories (2)					
Description mm				Reference	Weight kg
Fixing clamps	Ø 12			XSZB112	0.006
	Ø 18			XSZB118	0.010
	Ø 30			XSZB130	0.020

(1) For a 5 m long cable add L1 to the reference; for a 10 m long cable add L2 to the reference.

Example: XS1M12KP340 becomes XS1M12KP340L1 with a 5 m long cable.

(2) For further information, see page 3/116.

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, metal and plastic, flush and non flush mountable

Four-wire DC, solid-state PNP + NPN NO/NC
programmable output

Characteristics

Sensor type		XS●M●●KP340D		XS●M●●KP340	
Product certifications		UL, CSA, C€			
Connection		M12 connector		Pre-cabled, length: 2 m	
Operating zone	Ø 12 flush mountable	mm	0...1.6		
	Ø 12 non flush mountable	mm	0...3.2		
	Ø 18 flush mountable	mm	0...4		
	Ø 18 non flush mountable	mm	0...6.4		
	Ø 30 flush mountable	mm	0...8		
	Ø 30 non flush mountable	mm	0...12		
Differential travel		%	1...15 of effective sensing distance (Sr)		
Degree of protection		Conforming to IEC 60529	IP 67		IP 68, double insulation
Storage temperature		°C	- 40...+ 85		
Operating temperature		°C	- 25...+ 70		
Materials	Case	Nickel plated brass for XS1M and XS2M, PPS for XS4P			
	Cable	–		PvR 4 x 0.34 mm²	
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)		
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms		
Output state indication		Yellow LED, 4 viewing ports at 90°		Yellow LED, annular	
Rated supply voltage		V	12...24 with protection against reverse polarity		
Voltage limits (including ripple)		V	10...36		
Switching capacity		mA	≤ 200 with overload and short-circuit protection		
Voltage drop, closed state		V	≤ 2.6		
Current consumption, no-load		mA	≤ 10		
Maximum switching frequency	Ø 12	Hz	5000		
	Ø 18	Hz	2000		
	Ø 30 flush mountable	Hz	1000		
	Ø 30 non flush mountable	Hz	1000		
Delays	First-up	ms	≤ 5		
	Response	ms	≤ 0.1 for Ø 12, ≤ 0.15 for Ø 18, ≤ 0.3 for Ø 30		
	Recovery	ms	≤ 0.1 for Ø 12, ≤ 0.35 for Ø 18, ≤ 0.7 for Ø 30		

Wiring schemes

M12 connector




Pre-cabled

BU: Blue
BN: Brown
BK: Black
WH: White

PNP + NPN


4-wire programmable, NO or NC output

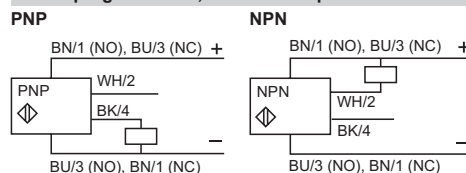

Setting-up

Sensor	Minimum mounting distances (mm)			
	Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 12 flush mountable XS1M12	e ≥ 4	e ≥ 24	e ≥ 6	d ≥ 12 h ≥ 0
Ø 12 non flush mountable XS2M12 and XS4P12	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36 h ≥ 8
Ø 18 flush mountable XS1M18	e ≥ 10	e ≥ 60	e ≥ 15	d ≥ 18 h ≥ 0
Ø 18 non flush mountable XS2M18 and XS4P18	e ≥ 16	e ≥ 96	e ≥ 24	d ≥ 54 h ≥ 16
Ø 30 flush mountable XS1M30	e ≥ 20	e ≥ 120	e ≥ 30	d ≥ 30 h ≥ 0
Ø 30 non flush mountable XS2M30 and XS4P30	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90 h ≥ 30

Dimensions



Sensor	Flush mountable in metal				Non flush mountable in metal				
	Pre-cabled		Connector		Pre-cabled		Connector		
Ø 12 metal	a	b	a	b	a	b	a	b	c
Ø 12 plastic	54	42	61	42	55	42	66	42	5
Ø 18 metal	—	—	—	—	54	42	61	43	0
Ø 18 plastic	60	51	72	51	60	44	72	44	8
Ø 30 metal	—	—	—	—	60	51	70	51	0
Ø 30 plastic	60	51	72	51	63	41	75	41	13
	—	—	—	—	60	51	70	51	0


Inductive proximity sensors

OsiSense XS, general purpose


Plastic, cylindrical, non flush mountable

Two-wire AC or DC


Three-wire DC, solid-state output



XS4P●●●●340
 XS4P●●●●370
 XS4P●●●●230



XS4P●●●●340D
 XS4P●●●●370D
 XS4P●●●●230K



XS4P08●●340S

Sensing dist. (Sn) mm	Function	Output	Connection	Reference	Weight kg
Ø 8, threaded M8 x 1					
Three-wire --- 12-24 V					
2.5	NO	PNP	Pre-cabled (L = 2 m) (1) (2)	XS4P08PA340	0.025
		NPN	Pre-cabled (L = 2 m) (1) (2)	XS4P08NA340	0.025
	NC	PNP	Pre-cabled (L = 2 m) (1) (2)	XS4P08PB340	0.025
		NPN	Pre-cabled (L = 2 m) (1) (2)	XS4P08NB340	0.025
Three-wire --- 12-48 V					
2.5	NO	PNP	Pre-cabled (L = 2 m) (1)	XS4P08PA370	0.030
		NPN	Pre-cabled (L = 2 m)	XS4P08NA370	0.030
	NC	PNP	Pre-cabled (L = 2 m)	XS4P08PB370	0.030
		NPN	Pre-cabled (L = 2 m)	XS4P08NB370	0.030
Two-wire ~ or --- 24-240 V					
2.5	NO		Pre-cabled (L = 2 m) (1)	XS4P08MA230	0.030
			1/2"-20UNF connector	XS4P08MA230K	0.020
	NC		Pre-cabled (L = 2 m) (1)	XS4P08MB230	0.030
			1/2"-20UNF connector	XS4P08MB230K	0.020
Ø 12, threaded M12 x 1					
Three-wire --- 12-24 V					
4	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P12PA340	0.060
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P12NA340	0.060
	NC	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P12PB340	0.060
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P12NB340	0.060
Three-wire --- 12-48 V					
4	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P12PA370	0.065
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P12NA370	0.065
	NC	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P12PB370	0.065
		NPN	Pre-cabled (L = 2 m) (3)	XS4P12NB370	0.065
Two-wire ~ or --- 24-240 V					
4	NO		Pre-cabled (L = 2 m) (1)	XS4P12MA230	0.065
			1/2"-20UNF connector	XS4P12MA230K	0.030
	NC		Pre-cabled (L = 2 m) (1)	XS4P12MB230	0.065
			1/2"-20UNF connector	XS4P12MB230K	0.030
Ø 18, threaded M18 x 1					
Three-wire --- 12-24 V					
8	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P18PA340	0.090
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P18NA340	0.090
	NC	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P18PB340	0.090
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P18NB340	0.090
Three-wire --- 12-48 V					
8	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P18PA370	0.100
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P18NA370	0.100
	NC	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P18PB370	0.100
		NPN	Pre-cabled (L = 2 m) (3)	XS4P18NB370	0.100
Two-wire ~ or --- 24-240 V					
8	NO		Pre-cabled (L = 2 m) (1)	XS4P18MA230	0.100
			1/2"-20UNF connector	XS4P18MA230K	0.040
	NC		Pre-cabled (L = 2 m) (1)	XS4P18MB230	0.100
			1/2"-20UNF connector	XS4P18MB230K	0.040
Ø 30, threaded M30 x 1.5					
Three-wire --- 12-24 V					
15	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P30PA340	0.120
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P30NA340	0.120
	NC	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P30PB340	0.120
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P30NB340	0.120
Three-wire --- 12-48 V					
15	NO	PNP	Pre-cabled (L = 2 m) (1) (3)	XS4P30PA370	0.140
		NPN	Pre-cabled (L = 2 m) (1) (3)	XS4P30NA370	0.140
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS4P30PB370	0.140
		NPN	Pre-cabled (L = 2 m) (3)	XS4P30NB370	0.140
Two-wire ~ or ---					
15	NO		Pre-cabled (L = 2 m) (1)	XS4P30MA230	0.140
			1/2"-20UNF connector	XS4P30MA230K	0.080
	NC		Pre-cabled (L = 2 m) (1)	XS4P30MB230	0.140
			1/2"-20UNF connector	XS4P30MB230K	0.080

(1) For a 5 m long cable add L1 to the reference; for a 10 m long cable add L2 to the reference. Example: XS4P08PA340 becomes XS4P08PA340L1 with a 5 m long cable.

(2) For an M8 connector, add S to the reference. Example: XS4P08PA340 becomes XS4P08PA340S with an M8 connector.

(3) For an M12 connector, add D to the reference. Example: XS4P12PA370 becomes XS4P12PA370D with an M12 connector.

Inductive proximity sensors

OsiSense XS, general purpose

Plastic, cylindrical, non flush mountable

Two-wire AC or DC

Three-wire DC, solid-state output

Characteristics			
Sensor type		XS4P●●●●340●	XS4P●●●●370●
Product certifications		UL, CSA, Cc, ECOLAB	
Connection	Pre-cabled	Length: 2 m	
	Connector	M8 on Ø 8 M12 on Ø 12, Ø 18 and Ø 30	1/2"-20UNF
Operating zone	Ø 6.5 and Ø 8	mm	0...2
	Ø 12	mm	0...3.2
	Ø 18	mm	0...6.4
	Ø 30	mm	0...12
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529		IP 68, double insulation for pre-cabled version (except Ø 8: IP 67) IP 67 for connector version
Storage temperature		°C	-40...+85
Operating temperature		°C	-25...+70
Materials	Case	PPS	
	Cable	PvR 3 x 0.34 mm ² except Ø 6.5 and 8: 3 x 0.11 mm ²	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED: annular on pre-cabled version Yellow LED: 4 viewing ports at 90° on connector version	
Rated supply voltage		V	12...24 with protection against reverse polarity
Voltage limits (including ripple)		V	10...36
Switching capacity		mA	≤ 200 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Residual current, open state		mA	—
Current consumption, no-load		mA	≤ 10
Maximum switching frequency	Ø 6.5, Ø 8 and Ø 12	Hz	5000
	Ø 18	Hz	2000
	Ø 30	Hz	1000
			3000, ~ 25
Delays	First-up	ms	≤ 10
	Response	ms	≤ 0.1 for Ø 8 and Ø 12, ≤ 0.15 for Ø 18, ≤ 0.3 for Ø 30
	Recovery	ms	≤ 0.1 for Ø 8 and Ø 12, ≤ 0.35 for Ø 18, ≤ 0.7 for Ø 30
			≤ 0.2 for Ø 8, Ø 12 and Ø 18, ≤ 0.4 for Ø 30

Wiring schemes

Connector	Pre-cabled	PNP	NPN	2-wire ~ or —
 	BU: Blue BN: Brown BK: Black	 For M8 connector, NO and NC outputs on terminal 4		

Setting-up

Minimum mounting distances (mm)

	Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 8	e ≥ 10	e ≥ 30	e ≥ 7.5	d ≥ 24 h ≥ 5
Ø 12	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36 h ≥ 8
Ø 18	e ≥ 16	e ≥ 96	e ≥ 24	d ≥ 54 h ≥ 16
Ø 30	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90 h ≥ 30

Dimensions


	3-wire — 12-24 V				3-wire — 12-48 V or 2-wire ~ / — 24-240 V			
	Pre-cabled (mm)		Connector (mm)		Pre-cabled (mm)		Connector (mm)	
XS4P	a	b	a	b	a	b	a	b
Ø 8	33	26	42	26	50	42	61	40
Ø 12	35	25	48	27	54	42	61	42
Ø 18	36	25	48	29	62	52	70	52
Ø 30	43	32	50	34	62	52	70	52

Inductive proximity sensors


OsiSense XS, general purpose

Basic, cylindrical, metal, flush and non flush mountable


Three-wire DC, solid-state output




XS108BLPAM8

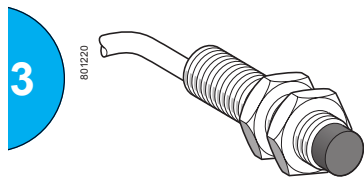

XS208BLAL



XS112BL



XS212BLAM12


Sensing distance (Sn)	Function	Output	Connection	Reference	Weight
mm					kg
Ø 8, threaded M8 x 1					
Three-wire --- 12-24 V, flush mountable					
1.5	NO	PNP	Pre-cabled (L = 2 m)	XS108BLPAL2	0.035
			Pre-cabled (L = 5 m)	XS108BLPAL5	0.105
			M8 connector	XS108BLPAM8	0.008
			M12 connector	XS108BLPAM12	0.015
	NPN		Pre-cabled (L = 2 m)	XS108BLNAL2	0.035
			M12 connector	XS108BLNAM12	0.015
Three-wire --- 12-24 V, non flush mountable					
2.5	NO	PNP	Pre-cabled (L = 2 m)	XS208BLPAL2	0.035
			Pre-cabled (L = 5 m)	XS208BLPAL5	0.105
			M8 connector	XS208BLPAM8	0.008
			M12 connector	XS208BLPAM12	0.015
	NPN		Pre-cabled (L = 2 m)	XS208BLNAL2	0.035
			M12 connector	XS208BLNAM12	0.015
Ø 12, threaded M12 x 1					
Three-wire --- 12-24 V, flush mountable					
2	NO	PNP	Pre-cabled (L = 2 m)	XS112BLPAL2	0.070
			Pre-cabled (L = 3 m)	XS112BLPAL3	0.095
			Pre-cabled (L = 5 m)	XS112BLPAL5	0.140
			M12 connector	XS112BLPAM12	0.015
	NPN		Pre-cabled (L = 2 m)	XS112BLNAL2	0.070
			M12 connector	XS112BLNAM12	0.015
	NC	PNP	Pre-cabled (L = 2 m)	XS112BLPBL2	0.070
			M12 connector	XS112BLPBM12	0.015
Three-wire --- 12-24 V, non flush mountable					
4	NO	PNP	Pre-cabled (L = 2 m)	XS212BLPAL2	0.070
			Pre-cabled (L = 5 m)	XS212BLPAL5	0.140
			M12 connector	XS212BLPAM12	0.015
	NPN		Pre-cabled (L = 2 m)	XS212BLNAL2	0.070
			Pre-cabled (L = 7 m)	XS212BLNAL7	0.185
			M12 connector	XS212BLNAM12	0.015
	NC	PNP	Pre-cabled (L = 2 m)	XS212BLPBL2	0.070
			Pre-cabled (L = 5 m)	XS212BLPBL5	0.140
		NPN		Pre-cabled (L = 2 m)	XS212BLNBL2

Inductive proximity sensors


OsiSense XS, general purpose

Basic, cylindrical, metal, flush and non flush mountable


Three-wire DC, solid-state output




XS118BL●●M12




XS118BL●●L2●




XS130BL●●L●



XS230BL●●L●



XSZB1●●



XZCPV1141L●●

Sensing distance (Sn)	Function	Output	Connection	Reference	Weight
mm					kg
Ø 18, threaded M18 x 1					
Three-wire 12-24 V, flush mountable					
5	NO	PNP	Pre-cabled (L = 2 m)	XS118BLPAL2	0.105
			Pre-cabled (L = 5 m)	XS118BLPAL5	0.175
			M12 connector	XS118BLPAM12	0.035
	NPN		Pre-cabled (L = 2 m)	XS118BLNAL2	0.105
			Pre-cabled (L = 5 m)	XS118BLNAL5	0.175
			M12 connector	XS118BLNAM12	0.035
	NC	PNP	Pre-cabled (L = 2 m)	XS118BLPBL2	0.105
			M12 connector	XS118BLPBM12	0.035

Three-wire 12-24 V, non flush mountable					
8	NO	PNP	Pre-cabled (L = 2 m)	XS218BLPAL2	0.105
			Pre-cabled (L = 5 m)	XS218BLPAL5	0.175
			M12 connector	XS218BLPAM12	0.035
	NPN		Pre-cabled (L = 2 m)	XS218BLNAL2	0.105
			Pre-cabled (L = 5 m)	XS218BLNAL5	0.175
			Pre-cabled (L = 7 m)	XS218BLNAL7	0.220
	NC	PNP	Pre-cabled (L = 2 m)	XS218BLPBL2	0.105
			M12 connector	XS218BLPBM12	0.035

Ø 30, threaded M30 x 1.5					
Three-wire 12-24 V, flush mountable					
10	NO	PNP	Pre-cabled (L = 2 m)	XS130BLPAL2	0.165
			M12 connector	XS130BLPAM12	0.075
	NPN		Pre-cabled (L = 2 m)	XS130BLNAL2	0.165
			Pre-cabled (L = 3 m)	XS130BLNAL3	0.190
			M12 connector	XS130BLNAM12	0.075
	NC	PNP	Pre-cabled (L = 2 m)	XS130BLPBL2	0.165
			M12 connector	XS130BLPBM12	0.075

Three-wire 12-24 V, non flush mountable					
15	NO	PNP	Pre-cabled (L = 2 m)	XS230BLPAL2	0.155
			Pre-cabled (L = 5 m)	XS230BLPAL5	0.225
			M12 connector	XS230BLPAM12	0.085
	NPN		Pre-cabled (L = 2 m)	XS230BLNAL2	0.155
			Pre-cabled (L = 7 m)	XS230BLNAL7	0.225
			M12 connector	XS230BLNAM12	0.085
	NC	PNP	Pre-cabled (L = 2 m)	XS230BLPBL2	0.155

Fixing accessories (1)			
Description	For use with sensors	Reference	Weight
Fixing clamps	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

Cabling accessories			
Description	Length of cable	Reference	Weight
Pre-wired connectors female straight	m		kg
M12 connector, 4 pins	5	XZCPV1141L5	0.210
PVC cable	10	XZCPV1141L10	0.390

(1) For further information, see page 3/116.

Inductive proximity sensors

OsiSense XS, general purpose



Basic, cylindrical, metal, flush and non flush mountable

Three-wire DC, solid-state output

Characteristics

Sensor type			XS1●●BLP●L● XS1●●BLN●L●	XS1●●BLP●M● XS1●●BLN●M●	XS2●●BLP●L XS2●●BLN●L	XS2●●BLP●M● XS2●●BLN●M●	
Product certifications			UL, CSA, CE				
Connection	Pre-cabled		Length 2, 3 or 5 m, depending on model		Length 2, 5 or 7m, depending on model	–	
	Connector		–	M8 on Ø 8 M12 on Ø 8, Ø 12, Ø 18 and Ø 30	–	M8 on Ø 8 M12 on Ø 8, Ø 12, Ø 18 and Ø 30	
Operating zone (1)	Ø 8	mm	0...1.2		0...2		
	Ø 12	mm	0...1.6		0...3.2		
	Ø 18	mm	0...4		0...6.4		
	Ø 30	mm	0...8		0...12		
Differential travel		%	1...15 of effective sensing distance (Sr)				
Degree of protection		Conforming to IEC 60529	IP 65 and IP 67				
Storage temperature		°C	- 40...+ 85				
Operating temperature		°C	- 25...+ 70				
Materials	Case		Nickel plated brass				
	Cable		PVC 3 x 0.14 mm² except Ø 8 : 3 x 0.11 mm²	–	PVC 3 x 0.14 mm² except Ø 8 : 3 x 0.11 mm²	–	
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)				
Shock resistance		Conforming to IEC 60068-2-27	50 gn, duration 11 ms				
Output state indication			Yellow LED, on rear	Yellow LED: 2 viewing ports at 180°	Yellow LED, on rear	Yellow LED: 2 viewing ports at 180°	
Rated supply voltage		V	12...24 with protection against reverse polarity				
Voltage limits (including ripple)		V	10...36				
Switching capacity		mA	≤ 200 (except Ø 8: ≤ 50) with overload and short-circuit protection (2)				
Voltage drop, closed state		V	≤ 2				
Current consumption, no-load		mA	≤ 10				
Residual current, open state		mA	–				
Maximum switching frequency	Ø 8	Hz	1000		1000		
	Ø 12	Hz	2500		1200		
	Ø 18	Hz	1200		500		
	Ø 30	Hz	500		300		
Delays	First-up	ms	≤ 15		≤ 15		
	Response	Ø 8	ms	≤ 5		≤ 5	
		Ø 12	ms	≤ 0.1		≤ 0.1	
		Ø 18	ms	≤ 0.1		≤ 0.1	
		Ø 30	ms	≤ 0.1		≤ 0.2	
	Recovery	Ø 8	ms	≤ 0.3		≤ 0.3	
		Ø 12	ms	≤ 0.15		≤ 0.4	
		Ø 18	ms	≤ 0.3		≤ 1	
Ø 30		ms	≤ 1		≤ 1.4		

Wiring schemes





Connector	Pre-cabled	PNP	NPN
M8 	M12 	BU: Blue BN: Brown BK: Black 	

(1) Detection curves, see page 3/120.

(2) These sensors do not incorporate overload or short-circuit protection and therefore, it is essential to connect a 0.4 A "quick-blow" fuse in series with the load, see page 3/116.


Setting-up

Minimum mounting distances (mm)



Sensors		Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 8 flush mountable	XS108	$e \geq 3$	$e \geq 18$	$e \geq 4.5$	$d \geq 8$ $h \geq 0$
Ø 8 non flush mountable	XS208	$e \geq 10$	$e \geq 30$	$e \geq 7.5$	$d \geq 24$ $h \geq 5$
Ø 12 flush mountable	XS112	$e \geq 4$	$e \geq 24$	$e \geq 6$	$d \geq 12$ $h \geq 0$
Ø 12 non flush mountable	XS212	$e \geq 16$	$e \geq 48$	$e \geq 12$	$d \geq 36$ $h \geq 8$
Ø 18 flush mountable	XS118	$e \geq 10$	$e \geq 60$	$e \geq 15$	$d \geq 18$ $h \geq 0$
Ø 18 non flush mountable	XS218	$e \geq 16$	$e \geq 96$	$e \geq 24$	$d \geq 54$ $h \geq 16$
Ø 30 flush mountable	XS130	$e \geq 20$	$e \geq 120$	$e \geq 30$	$d \geq 30$ $h \geq 0$
Ø 30 non flush mountable	XS230	$e \geq 60$	$e \geq 180$	$e \geq 45$	$d \geq 90$ $h \geq 30$

Dimensions



Sensors		Flush mountable in metal					
		Pre-cabled (mm)		M8 connector (mm)		M12 connector (mm)	
		a	b	a	b	a	b
Ø 8	XS108	42	40	53	42	62	39
Ø 12	XS112	44	31	—	—	55	34
Ø 18	XS118	53	41	—	—	64	43
Ø 30	XS130	57	44	—	—	68	47


Sensors		Non flush mountable in metal								
		Pre-cabled (mm)			M8 connector (mm)			M12 connector (mm)		
		a	b	c	a	b	c	a	b	c
Ø 8	XS208	42	36	4	53	38	4	62	36	4
Ø 12	XS212	44	26	5	—	—	—	55	29	5
Ø 18	XS218	53	33	8	—	—	—	64	35	8
Ø 30	XS230	57	32	13	—	—	—	68	34	13

Inductive proximity sensors

OsiSense XS, general purpose

Cylindrical, almost flush mountable, increased range

Three-wire DC, solid-state output



XS1L06●A349

Sensing distance (Sn) (mm)	Function	Output	Connection	Reference	Weight kg
Ø 6.5, plain					
2.5	NO	PNP	Pre-cabled (L = 2 m)	XS1L06PA349	0.025
			M8 connector	XS1L06PA349S	0.010
			M12 connector	XS1L06PA349D	0.015
	NPN	PNP	Pre-cabled (L = 2 m)	XS1L06NA349	0.025
			M8 connector	XS1L06NA349S	0.010
			M12 connector	XS1L06NA349D	0.015
	NC	PNP	Pre-cabled (L = 2 m)	XS1L06PB349	0.025
			M8 connector	XS1L06PB349S	0.010
			M12 connector	XS1L06PB349D	0.015

Ø 8, threaded M8 x 1

2.5	NO	PNP	Pre-cabled (L = 2 m)	XS1N08PA349	0.035
			M8 connector	XS1N08PA349S	0.015
			M12 connector	XS1N08PA349D	0.020
	NPN	PNP	Pre-cabled (L = 2 m)	XS1N08NA349	0.035
			M8 connector	XS1N08NA349S	0.015
			M12 connector	XS1N08NA349D	0.020
	NC	PNP	Pre-cabled (L = 2 m)	XS1N08PB349	0.035
			M8 connector	XS1N08PB349S	0.015
			M12 connector	XS1N08PB349D	0.020

Ø 12, threaded M12 x 1

4	NO	PNP	Pre-cabled (L = 2 m)	XS1N12PA349	0.070
			M12 connector	XS1N12PA349D	0.020
			M12 connector	XS1N12PA349D	0.020
	NPN	PNP	Pre-cabled (L = 2 m)	XS1N12NA349	0.070
			M12 connector	XS1N12NA349S	0.020
			M12 connector	XS1N12NA349D	0.020

Ø 18, threaded M18 x 1

10	NO	PNP	Pre-cabled (L = 2 m)	XS1N18PA349	0.100
			M12 connector	XS1N18PA349D	0.040
			M12 connector	XS1N18PA349D	0.040
	NPN	PNP	Pre-cabled (L = 2 m)	XS1N18NA349	0.100
			M12 connector	XS1N18NA349S	0.040
			M12 connector	XS1N18NA349D	0.040


Ø 30, threaded M30 x 1.5

20	NO	PNP	Pre-cabled (L = 2 m)	XS1N30PA349	0.160
			M12 connector	XS1N30PA349D	0.100
			M12 connector	XS1N30PA349D	0.100
	NPN	PNP	Pre-cabled (L = 2 m)	XS1N30NA349	0.160
			M12 connector	XS1N30NA349S	0.100
			M12 connector	XS1N30NA349D	0.100


Accessories (1)

Accessories (*)			
Description mm		Reference	Weight kg
Fixing clamps	Ø 6.5 (plain)	XSZB165	0.005
	Ø 8	XSZB108	0.006
	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020


(1) For further information, see page 3/116.



XS1N08●●A349S



XS1N●●●●A349D



XSZB1●●

Characteristics			
Sensor type		XS1.....349D	XS1.....349S
Product certifications		UL, CSA, CEC	
Connection		M12 connector	M8 connector
Operating zone	Ø 6.5 and Ø 8	mm	0...2
	Ø 12	mm	0...3.2
	Ø 18	mm	0...8
	Ø 30	mm	0...16
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529	IP 67	IP 68, double insulation (except Ø 6.5 and Ø 8: IP 67)
	Conforming to DIN 40050	IP 69K for Ø 12 to Ø 30	
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 70
Materials	Case	Nickel plated brass	
	Cable	PvR 3 x 0.34 mm ² except Ø 6.5 and 8: 3 x 0.11 mm ²	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED, 4 viewing ports at 90°	Yellow LED, annular
Rated supply voltage		V	12...24 with protection against reverse polarity
Voltage limits (including ripple)		V	10...36
Switching capacity		mA	≤ 200 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Current consumption, no-load		mA	≤ 10
Maximum switching frequency	Ø 6.5, Ø 8 and Ø 12	Hz	2500
	Ø 18	Hz	1000
	Ø 30	Hz	500
Delays	First-up	ms	≤ 5
	Response	ms	≤ 0.2 for Ø 8 and Ø 12, ≤ 0.3 for Ø 18, ≤ 0.6 for Ø 30
	Recovery	ms	≤ 0.2 for Ø 8 and Ø 12, ≤ 0.7 for Ø 18, ≤ 1.4 for Ø 30

Wiring schemes

Connector	Pre-cabled	PNP 3-wire	NPN 3-wire
M8 	M12 	BU: Blue BN: Brown BK: Black 	


For M8 connector, NO and NC outputs on terminal 4

Setting-up precautions

Sensor	Minimum mounting distances (mm)			
	Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 6.5	 e ≥ 5	 e ≥ 30	 e ≥ 7.5	 d ≥ 10 h ≥ 1.6
Ø 8	 e ≥ 5	 e ≥ 30	 e ≥ 7.5	 d ≥ 10 h ≥ 1.6
Ø 12	 e ≥ 8	 e ≥ 48	 e ≥ 12	 d ≥ 14 h ≥ 2.4
Ø 18	 e ≥ 20	 e ≥ 96	 e ≥ 30	 d ≥ 28 h ≥ 3.6
Ø 30	 e ≥ 40	 e ≥ 240	 e ≥ 60	 d ≥ 50 h ≥ 6

Dimensions

Sensor	Flush mountable in metal					
	Pre-cabled		M8 connector		M12 connector	
	a	b	a	b	a	b
Ø 6.5	33	—	42	—	45	—
Ø 8	33	25	42	26	45	23
Ø 12	35	25	—	—	50	30
Ø 18	39	28	—	—	50	28
Ø 30	43	32	—	—	55	32




Inductive proximity sensors


OsiSense XS, general purpose

Miniature, cylindrical, flush and non flush mountable


Three-wire DC, solid-state output




XS1L04●●310




XS1N05●●310




XS1N05●●311S




XS1L04●●310S



XS●L06●●340



XS●L06●●340S
XS●L06●●349S



XS●L06●●340D

Ø 4 plain (1)

Sensing distance (Sn) mm	Function	Output	Connection (2)	Reference	Weight kg
Brass case, flush mountable					
1	NO	PNP	Pre-cabled (L = 2 m)	XS1L04PA310	0,025
			M8 connector	XS1L04PA310S	0,010
	NPN		Pre-cabled (L = 2 m)	XS1L04NA310	0,025
			M8 connector	XS1L04NA310S	0,010
	NC	PNP	Pre-cabled (L = 2 m)	XS1L04PB310	0,025
			M8 connector	XS1L04PB310S	0,010
		NPN	Pre-cabled (L = 2 m)	XS1L04NB310	0,025
			M8 connector	XS1L04NB310S	0,010

Stainless steel case, flush mountable

0,8	NO	PNP	Pre-cabled (L = 2 m)	XS1L04PA311	0,025
			M8 connector	XS1L04PA311S	0,010
	NPN		Pre-cabled (L = 2 m)	XS1L04NA311	0,025
			M8 connector	XS1L04NA311S	0,010
	NC	PNP	Pre-cabled (L = 2 m)	XS1L04PB311	0,025
			M8 connector	XS1L04PB311S	0,010
		NPN	Pre-cabled (L = 2 m)	XS1L04NB311	0,025
			M8 connector	XS1L04NB311S	0,010

Ø 5, threaded M5 x 0.5 (1)

Sensing distance (Sn) mm	Function	Output	Connection (2)	Reference	Weight kg
Brass case, flush mountable					
1	NO	PNP	Pre-cabled (L = 2 m)	XS1N05PA310	0,030
				XS1N05NA310	0,030
	NC	PNP	Pre-cabled (L = 2 m)	XS1N05PB310	0,030
				XS1N05NB310	0,030

Stainless steel case, flush mountable

0,8	NO	PNP	Pre-cabled (L = 2 m)	XS1N05PA311	0,030
			M8 connector	XS1N05PA311S	0,015
	NPN		Pre-cabled (L = 2 m)	XS1N05NA311	0,030
			M8 connector	XS1N05NA311S	0,015
	NC	PNP	Pre-cabled (L = 2 m)	XS1N05PB311	0,030
			M8 connector	XS1N05PB311S	0,015
		NPN	Pre-cabled (L = 2 m)	XS1N05NB311	0,030
			M8 connector	XS1N05NB311S	0,015

Ø 6.5 plain (1)

Sensing distance (Sn) mm	Function	Output	Connection (2)	Reference	Weight kg
Stainless steel case, non flush mountable					
2,5	NO	PNP	Pre-cabled (L = 2 m)	XS2L06PA340	0,025
			M8 connector	XS2L06PA340S	0,010
			M12 connector	XS2L06PA340D	0,015
		NPN	Pre-cabled (L = 2 m)	XS2L06NA340	0,025
			M8 connector	XS2L06NA340S	0,010
			M12 connector	XS2L06NA340D	0,015
	NC	PNP	Pre-cabled (L = 2 m)	XS2L06PB340	0,025
			M8 connector	XS2L06PB340S	0,010
			M12 connector	XS2L06PB340D	0,015
		NPN	Pre-cabled (L = 2 m)	XS2L06NB340	0,025
			M8 connector	XS2L06NB340S	0,010
			M12 connector	XS2L06NB340D	0,015

(1) For accessories, see page 3/116.

(2) For a 5 m long cable add L1 to the reference; for a 10 m long cable add L2 to the reference.
Example: XS1L04PA310 becomes XS1L04PA310L1 with a 5 m long cable.

Characteristics			
Sensor type		XS1.....S, XS1.....D, XS2L06A340	XS1....., XS2L06A340
Product certifications		UL, CSA, CEE	
Connection (1)	Connector	M8 on XS1.....S and M12 on XS1.....D	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 4	mm	0...0.8 (brass), 0...0.6 (stainless steel)
	Ø 5	mm	0...0.8 (brass), 0...0.6 (stainless steel)
	Ø 6.5 non flush mountable	mm	0...2 (stainless steel)
Degree of protection	Conforming to IEC 60529	IP 67	
Storage temperature		°C	- 40...+ 85
Operating temperature		°C	- 25...+ 70
Materials	Case	Nickel plated brass or stainless steel 303	
	Cable	PvR 3 x 0.11 mm ² or 4 x 0.08 mm ²	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED, 4 viewing ports at 90°	Yellow LED, annular
Rated supply voltage		V	— 5...24 for XS1L04..... and XS1N05..... — 12...24 for XS2L06.....
Voltage limits (including ripple)		V	— 5...30 for XS1L04..... and XS1N05..... — 10...38 for XS2L06.....
Current consumption, no-load		mA	≤ 10
Switching capacity	3-wire PNP/NPN	mA	≤ 100 with overload and short-circuit protection ≤ 200 for XS2L06 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Maximum switching frequency		kHz	5
Delays	First-up	ms	≤ 5
	Response	ms	≤ 0.1
	Recovery	ms	≤ 0.1

(1) Detection curves, see page 3/120

Wiring schemes

Connector	Pre-cabled	PNP 3-wire	NPN 3-wire
	BU: Blue BN: Brown BK: Black WH: White		

For M8 connector, NO and NC outputs on terminal 4.

Setting-up

Minimum mounting distances (mm)


Sensor	Side by side	Face to face	Facing a metal object
Ø 4	$e \geq 2$	$e \geq 12$	$e \geq 3$
Ø 5	$e \geq 2$	$e \geq 12$	$e \geq 3$
Ø 6.5	$e \geq 5$	$e \geq 30$	$e \geq 7.5$

Tightening torque

Stainless steel: 2.2 N.m. Brass: 1.6 N.m (values obtained with washers mounted)

Dimensions

Sensor	Pre-cabled			M8 connector			M12 connector		
	a	b	c	a	b	c	a	b	c
Ø 4	28	—	—	42	—	—	—	—	—
Ø 5	28	24	—	42	24	—	—	—	—
Ø 6.5	33	—	4	46	—	4	49	—	4




Inductive proximity sensors

OsiSense XS Application

Adjustable range sensors

Cylindrical, flush mountable and non flush mountable

Three-wire DC, solid-state output

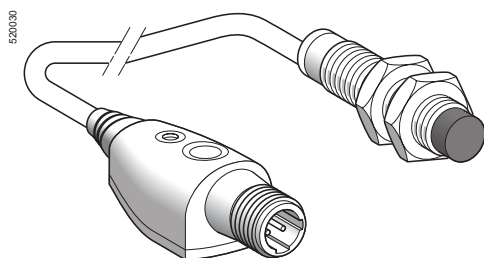

XS6...B2...L01M12

Ø 12, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
5	NO	PNP	Remote M12 connector on 0.15 m flying lead	XS612B2PAL01M12	0.100
		NPN	Remote M12 connector on 0.15 m flying lead	XS612B2NAL01M12	0.100
	NC	PNP	Remote M12 connector on 0.15 m flying lead	XS612B2PBL01M12	0.100
		NPN	Remote M12 connector on 0.15 m flying lead	XS612B2NBL01M12	0.100

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
9	NO	PNP	Remote M12 connector on 0.15 m flying lead	XS618B2PAL01M12	0.140
		NPN	Remote M12 connector on 0.15 m flying lead	XS618B2NAL01M12	0.140
	NC	PNP	Remote M12 connector on 0.15 m flying lead	XS618B2PBL01M12	0.140
		NPN	Remote M12 connector on 0.15 m flying lead	XS618B2NBL01M12	0.140

Ø 30, threaded M30 x 1.5


Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
18	NO	PNP	Remote M12 connector on 0.15 m flying lead	XS630B2PAL01M12	0.220
		NPN	Remote M12 connector on 0.15 m flying lead	XS630B2NAL01M12	0.220
	NC	PNP	Remote M12 connector on 0.15 m flying lead	XS630B2PBL01M12	0.220
		NPN	Remote M12 connector on 0.15 m flying lead	XS630B2NBL01M12	0.220

Accessories (1)


Description	Reference	Weight kg
Remote control fixing clamp	XSZBPM12	0.015
Sensor fixing clamps	Ø 12	XSZB112
	Ø 18	XSZB118
	Ø 30	XSZB130

(1) For further information, see page 3/116.

3



XSZBPM12



XSZB...

Characteristics


Sensor type			XS6●●B2●●L01M12	
Product certifications			UL, CSA, C€	
Connection	Connector		Remote M12 connector on 0.15 m flying lead	
Sensing distance and adjustment zone	Ø 12	Nominal sensing distance (Sn)	mm	0...5 non flush mounted / 0...3.4 flush mounted
		Precision adjustment zone	mm	1.7...5 non flush mounted / 1.7...3.4 flush mounted
	Ø 18	Nominal sensing distance (Sn)	mm	0...9 non flush mounted / 0...6 flush mounted
		Precision adjustment zone	mm	3...9 non flush mounted / 3...6 flush mounted
	Ø 30	Nominal sensing distance (Sn)	mm	0...18 non flush mounted / 0...11 flush mounted
		Precision adjustment zone	mm	6...18 non flush mounted / 6...11 flush mounted
Differential travel			%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529		IP 67, ☐	
Storage temperature			°C	- 40...+ 85
Operating temperature			°C	- 25...+ 70
Materials	Case		Nickel plated brass	
	Remote control		PBT	
	Cable		PvR - Ø 4.2 mm	
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27		50 gn, duration 11 ms	
Indicators	Output state		Yellow LED	
	Supply on and teach mode		Green LED	
Rated supply voltage			V	12...24 with protection against reverse polarity
Voltage limits (including ripple)			V	10...36
Switching capacity			mA	≤ 100 with overload and short-circuit protection
Voltage drop, closed state			V	≤ 2
Current consumption, no-load			mA	≤ 10
Maximum switching frequency			Hz	1000
Delays	First-up		ms	≤ 10
	Response		ms	≤ 0.3
	Recovery		ms	≤ 0.7

Wiring schemes


Connector



PNP






NPN



Setting-up

Minimum mounting distances (mm)



Side by side

flush mounted not flush mounted

Ø 12	e ≥ 14	50
Ø 18	e ≥ 28	100
Ø 30	e ≥ 48	180

Face to face

flush mounted not flush mounted


e ≥ 50	100
e ≥ 100	200
e ≥ 180	360

Facing a metal object

e ≥ 3.4
e ≥ 6
e ≥ 11

Dimensions

XS6

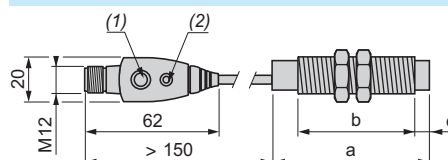

- (1) Teach mode button
(2) LED

Connector (mm)

	a	b	c
Ø 12	59	42	5
Ø 18	64	44	8
Ø 30	62.6	41	13

Inductive proximity sensors


OsiSense XS, general purpose with increased range

 Flat, flush mountable/non flush mountable + teach mode ⁽¹⁾

Two-wire AC or DC

Three-wire DC, solid-state output


3

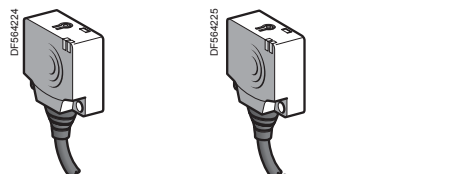


XS8E1A1●●L2




XS8E1A1●●M8

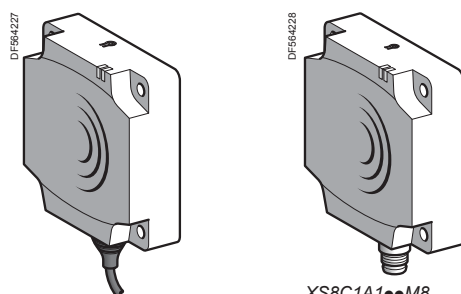

XS8C1A1●●L2

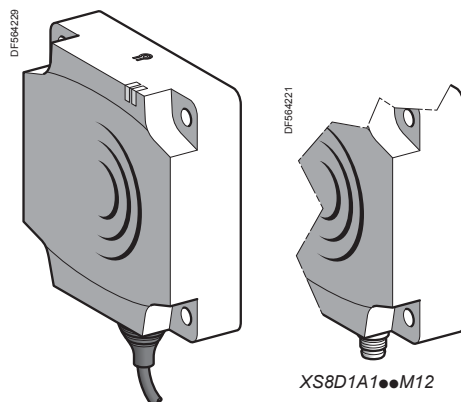

XS8D1A1●●L2

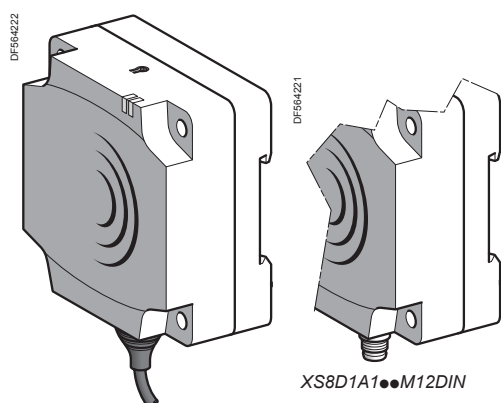

XS8D1A1●●L2DIN

 XS8E1A1●●L01M12
 XS8E1A1●●L01U20

XS8C1A1●●M8

XS8D1A1●●M12

XS8D1A1●●M12DIN

Flat, 26 x 26 x 13 mm format ⁽²⁾

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire --- with overload and short-circuit protection					
15	NO	PNP	Pre-cabled (L = 2 m) (3)	XS8E1A1PAL2	0.075
			M8 connector	XS8E1A1PAM8	0.040
			Remote M12 connector	XS8E1A1PAL01M12	0.040
		NPN	Pre-cabled (L = 2 m) (3)	XS8E1A1NAL2	0.075
			M8 connector	XS8E1A1NAM8	0.040
			Remote M12 connector	XS8E1A1NAL01M12	0.040
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS8E1A1PBL2	0.075
			M8 connector	XS8E1A1PBM8	0.040
			Remote M12 connector	XS8E1A1PBL01M12	0.040
		NPN	Pre-cabled (L = 2 m) (3)	XS8E1A1NBL2	0.075
			M8 connector	XS8E1A1NBM8	0.040
			Remote M12 connector	XS8E1A1NBL01M12	0.040

Two-wire ~ or --- unprotected ⁽⁴⁾

15	NO	-	Pre-cabled (L = 2 m) (3)	XS8E1A1MAL2	0.070
			Remote 1/2"-20UNF connector	XS8E1A1MAL01U20	0.040
	NC	-	Pre-cabled (L = 2 m) (3)	XS8E1A1MBL2	0.070
			Remote 1/2"-20UNF connector	XS8E1A1MBL01U20	0.040

Flat, 40 x 40 x 15 mm format ⁽²⁾

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire --- with overload and short-circuit protection					
25	NO	PNP	Pre-cabled (L = 2 m) (3)	XS8C1A1PAL2	0.095
			M8 connector	XS8C1A1PAM8	0.060
			Remote M12 connector	XS8C1A1PAL01M12	0.060
		NPN	Pre-cabled (L = 2 m) (3)	XS8C1A1NAL2	0.095
			M8 connector	XS8C1A1NAM8	0.060
			Remote M12 connector	XS8C1A1NAL01M12	0.060
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS8C1A1PBL2	0.095
			M8 connector	XS8C1A1PBM8	0.060
			Remote M12 connector	XS8C1A1PBL01M12	0.060
		NPN	Pre-cabled (L = 2 m) (3)	XS8C1A1NBL2	0.095
			M8 connector	XS8C1A1NBM8	0.060
			Remote M12 connector	XS8C1A1NBL01M12	0.060

Two-wire ~ or --- unprotected ⁽⁴⁾

25	NO	-	Pre-cabled (L = 2 m) (3)	XS8C1A1MAL2	0.090
			Remote 1/2"-20UNF connector	XS8C1A1MAL01U20	0.060
	NC	-	Pre-cabled (L = 2 m) (3)	XS8C1A1MBL2	0.090
			Remote 1/2"-20UNF connector	XS8C1A1MBL01U20	0.060

Flat, 80 x 80 x 26 mm format ⁽²⁾

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg	
Three-wire  with overload and short-circuit protection						
60	NO	PNP	Pre-cabled (L = 2 m) (3)	XS8D1A1PAL2 (5)	0.390	
			M12 connector	XS8D1A1PAM12 (5)	0.340	
		NPN	Pre-cabled (L = 2 m) (3)	XS8D1A1NAL2 (5)	0.390	
			M12 connector	XS8D1A1NAM12 (5)	0.340	
	NC	PNP	Pre-cabled (L = 2 m) (3)	XS8D1A1PBL2 (5)	0.390	
			M12 connector	XS8D1A1PBM12 (5)	0.340	
		NPN	Pre-cabled (L = 2 m) (3)	XS8D1A1NBL2 (5)	0.390	
			M12 connector	XS8D1A1NBM12 (5)	0.340	
	Two-wire  or  unprotected (4)					
	60	NO	—	Pre-cabled (L = 2 m) (3)	XS8D1A1MAL2 (5)	0.390
				1/2"-20UNF connector	XS8D1A1MAU20 (5)	0.340
		NC	—	Pre-cabled (L = 2 m) (3)	XS8D1A1MBL2 (5)	0.390
1/2"-20UNF connector				XS8D1A1MBU20 (5)	0.340	

⁽¹⁾ For further information on flush or non flush mountable sensors using teach mode, see page 3/22.

⁽²⁾ For accessories, see page 3/116.

⁽³⁾ For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

⁽⁴⁾ It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

⁽⁵⁾ For clipping onto 35 mm omega rail or 80 x 80 x 40 mm format, add DIN to the end of the reference. Example: XS8D1A1PAL2 DIN.

Characteristics			
Sensor type		XS8E●●●●M8, XS8C●●●●M8, XS8D●●●●M12, XS8D●●●●U20	XS8E●●●●L01M12, XS8E●●●●L01U20, XS8C●●●●L01M12, XS8C●●●●L01U20
Product certifications		UL, CSA, CE, ECOLAB	
Connection	Connector	M8 except XS8●●●●M12: M12 XS8●●●●U20: 1/2"-20UNF	Remote on 0.15 m flying lead XS8●●●●L01M12: M12 XS8●●●●L01U20: 1/2"-20UNF
	Pre-cabled	—	—
Sensing distance and adjustment zone	XS8E	Nominal sensing dist. Sn	mm 0...15 not flush mounted / 0...10 flush mounted
		Fine adjustment zone	mm 5...15 not flush mounted / 5...10 flush mounted
	XS8C	Nominal sensing dist. Sn	mm 0...25 not flush mounted / 0...15 flush mounted
		Fine adjustment zone	mm 8...25 not flush mounted / 8...15 flush mounted
	XS8D	Nominal sensing dist. Sn	mm 0...60 not flush mounted / 0...40 flush mounted
		Fine adjustment zone	mm 20...60 not flush mounted / 20...40 flush mounted
Differential travel		%	1...15 of effective sensing distance (Sr)
Degree of protection	Conforming to IEC 60529		IP 67, double insulation □ (except M8 connector: IP 67)
Storage temperature		°C	-40...+85
Operating temperature		°C	-25...+70
Materials	Case		PBT
	Cable		—
Vibration resistance	Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)
Shock resistance	Conforming to IEC 60068-2-27		50 gn, duration 11 ms
Indicators	Output state		Yellow LED
	Supply on and teach mode		Green LED
Rated supply voltage	3-wire	V	12...24 with protection against reverse polarity
	2-wire	V	~ or — 24...240 (~ 50/60 Hz)
Voltage limits (including ripple)	3-wire	V	10...36
	2-wire	V	~ or — 20...264
Current consumption, no-load	3-wire	mA	≤ 10
Residual current, open state	2-wire	mA	≤ 1.5
Switching capacity	3-wire	mA	≤ 100 XS8E, ≤ 200 XS8C and XS8D, with overload and short-circuit protection
	2-wire	mA	5...200 ~ XS8E, 5...300 ~ XS8C and XS8D, 5...200 — XS8C and XS8D
Voltage drop, closed state	3-wire	V	≤ 2
	2-wire	V	≤ 5.5
Maximum switching frequency		Hz	2000 XS8E, 1000 XS8C, 150 XS8D
Delays	First-up	ms	≤ 10 XS8E, XS8C and XS8D (3-wire), ≤ 10 XS8E and XS8C, ≤ 15 XS8D (2-wire)
	Response	ms	≤ 0.3
	Recovery	ms	≤ 0.8 XS8E and XS8C, ≤ 6 XS8D

Wiring schemes

Connector	Pre-cabled	PNP/M12 or M8	NPN/M12 or M8	2-wire 1/2"-20UNF
	BU: Blue BN: Brown BK: Black			

For M8 connector, NO and NC outputs on terminal 4

Setting-up

Minimum mounting distances (mm)

Side by side	e ≥	XS8E	XS8C	XS8D
Flush mounted		40	60	200
Not flush mounted		150	125	600
Face to face	e ≥	XS8E	XS8C	XS8D
Flush mounted		80	120	400
Not flush mounted		300	250	not recommended
Facing a metal object	e ≥	XS8E	XS8C	XS8D
		10	15	40

Dimensions

XS8C/D/E

Side view diagram of the XS8C/D/E sensor. It shows a rectangular body with a cable on the left and a connector on the right. Dimensions C and D are indicated for the top width, and B is indicated for the total height.

XS8C/D

Top and bottom view diagrams of the XS8C/D sensor. The top view shows a square body with four mounting holes and a central cable. Dimensions B and E are indicated for the top width, and A is indicated for the cable length. The bottom view shows the connector and dimensions F(3) and H. A label (1) points to the LED on the top view.

XS8E

Top and bottom view diagrams of the XS8E sensor. The top view shows a square body with four mounting holes and a central cable. Dimensions B and F(3) are indicated for the top width, and E and B are indicated for the cable length.

(1) LED
 (2) Teach mode button
 (3) For CHC type screws

Sensor	A (cable)	A (connector)	B	C	D	E	F	G	H
XS8E	14	11	26	13	8.8	20	3.5	6.8	6.6
XS8C	14	11	40	15	9.8	33	4.5	8.3	13.6
XS8D	23	18	80	26	16	65	5.5	8.5	37.8
XS8D●●DIN	23	18	80	40	30	65	5.1	22.5	37.8


Inductive proximity sensors

OsiSense XS Application

Sensors for rotation monitoring, slip detection, shaft
overload detection

Cylindrical form

Example:
Coupling breakage monitoring



822138

Functions

These self-contained rotation speed monitoring sensors have the special feature of incorporating, in the same case, the pulse sensing and processing electronics as well as the output switching amplifier that are required to establish an integrated rotation monitoring device.

The unit provides an economical solution for detecting slip, belt breakage, drive shaft shear and overloading, etc., in the following applications: conveyor belts, bucket elevators, Archimedian screws, grinders, crushers, pumps, centrifugal driers, mixers, etc.

Operating principle

The output signal of this type of sensor is processed by an impulse comparator incorporated in the sensor. The impulse frequency F_c generated by the moving part to be monitored is compared to the frequency F_r preset on the sensor. The output switching circuit of the sensor is in the closed state for $F_c > F_r$ and the open state for $F_c < F_r$.

Sensors XSAV are particularly suitable for the detection of underspeed: when the speed of the moving part F_c falls below a preset threshold F_r , this causes the output circuit of the sensor to switch off.

Note: Following power-up, the operational status of the sensor is subject to a delay of 9 seconds in order for the moving part being monitored to run-up to its nominal speed. During this time, the output of the sensor remains in the closed state.

Adjustment of frequency threshold



- Adjustment of sensor's frequency threshold: using potentiometer, 15 turns approximately.
- To increase the frequency threshold: turn the adjustment screw clockwise (+).
- To decrease the frequency threshold: turn the adjustment screw anti-clockwise (-).

	Diameter of sensor		
	a	b	c
1: Potentiometer			
2: LED			
3: Metal target	M30	4...6 mm	30 mm
		60 mm	

Potentiometer adjustment curves (for XSAV1●801, 2-wire ~ or --- sensors)

Low speed version (6...150 impulses/minute)


High speed version (120...3000 impulses/minute)

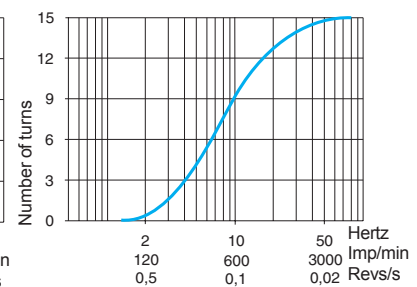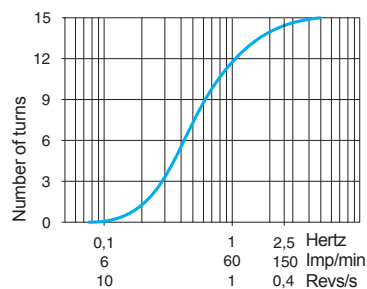

Setting-up


Minimum distances (mm)

Side by side



$e \geq 20$


Facing a metal object



$e \geq 30$


Fixing nut tightening torque: < 50 N.m

Face to face




$e \geq 120$



Mounted in a metal support



$d \geq 30, h \geq 0$

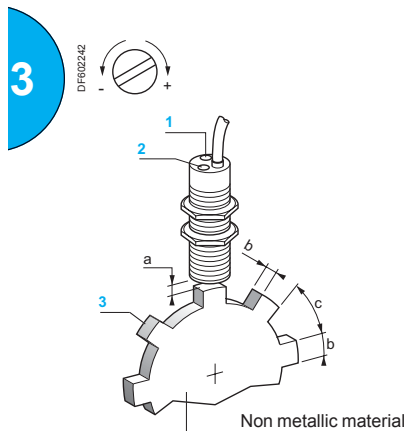

Flush mountable in metal



Lengths (mm):

a = Overall

b = Threaded section

a = 81

b = 67

Ø = M30

	DC	DC	AC/DC	AC/DC
Nominal sensing distance (Sn)	10 mm	10 mm	10 mm	10 mm
Adjustable frequency range	6...150 impulses/min	120...3000 impulses/min	6...150 impulses/min	120...3000 impulses/min

References


3-wire	PNP / NC	XSAV11373	XSAV12373	—	—
2-wire	— or ~ / NC	—	—	XSAV11801	XSAV12801
Weight (kg)	0.300				

Characteristics


Connection	Pre-cabled, 3 x 0.34 mm ² , length 2 m (1)	Pre-cabled, 2 x 0.34 mm ² , length 2 m (1)
Degree of protection conforming to IEC 60529	IP 67	
Operating zone	0...8 mm	
Repeat accuracy	3 % of Sr	
Differential travel	3...15 % of Fr	
Operating temperature	-25...+70 °C	
Output state indication	Red LED	
Rated supply voltage	— 12...48 V with protection against reverse polarity	~ 24...240 V (50/60 Hz) or — 24...210 V
Voltage limits (including ripple)	— 10...58 V	~ or — 20...264 V
Switching capacity	≤ 200 mA with overload and short-circuit protection	~ 5...350 mA or — 5...200 mA (2)
Voltage drop, closed state	≤ 1.8 V	≤ 5.7 V
Residual current, open state	—	≤ 1.5 mA
Current consumption, no-load	≤ 15 mA	—
Maximum switching frequency	6000 impulses/min (for XSAV11●●●); 48,000 impulses/min (for XSAV12●●●)	
"Run-up" delay following power-up	9 seconds ± 20 % + 1/Fr (3)	

Wiring schemes

3-wire
XSAV1●373



2-wire ~ or —
XSAV1●801



(1) For a 5 m long cable add L05 to the reference, for a 10 m long cable add L10 to the reference.

Example: XSAV11373 becomes XSAV11373L05 with a 5 m long cable.

(2) These sensors do not incorporate overload or short-circuit protection and therefore, it is essential to connect a 0.4 A "quick-blow" fuse in series with the load, see page 3/116.


(3) For a sensor without a "run-up" delay following power-up, replace XSAV1 in the reference by XSAV0. Example: XSAV11801 becomes XSAV01801 without a "run-up" delay. For a reduced "run-up" delay of 3 s, replace XSAV1 in the reference by XSAV3.

Inductive proximity sensors

OsiSense XS Application


Sensors for rotation monitoring, slip detection and shaft overload detection, with teach mode

Operating principle and applications

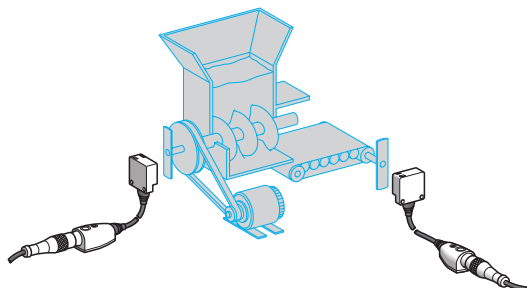


- These inductive proximity sensors are designed for monitoring rotational speed or the speed of the flow of objects to be protected or monitored. They operate on the principle of comparing a speed threshold preset by the operator against the instantaneous measurement of the speed of the moving object to be protected.
- They provide a simple, economical solution for detecting slip, belt breakage, coupling breakage and overload, etc.
- They are widely used in grinder/crusher, mixer, pump, centrifugal driver, conveyor belt, bucket elevator, Archimedean screw, etc. type applications.

Installation and setting-up

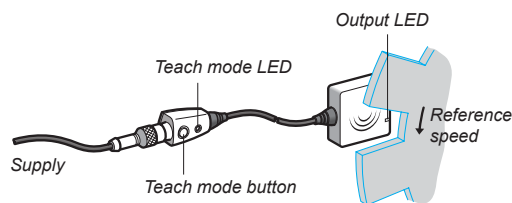

Setting-up and positioning the sensor

- In the positioning phase, the XS9 sensor can operate as a standard inductive sensor (Schneider Electric patent). Operation in inductive mode enables validation of reliable detection of all the moving objects to be monitored.
- Using this system, the positioning is therefore made 100 % reliable and can be checked at any time without altering the settings of the sensor.



Speed adjustment in teach mode

- The normal or reference speed of the moving object (1) to be monitored is adjusted by simply pressing the teach mode button (2) and is then validated by the display LED.
- If in doubt, the sensor can be reset at any time to the factory settings.
- (1) To allow the moving object to reach its normal speed (machine inertia), the sensor holds its output closed for 9 seconds.
- (2) The sensor's default drop-out underspeed corresponds to the preset speed - 30 %.

Example: If the preset speed is 1000 rpm, the sensor drops out on underspeed when the speed of the moving object drops below $1000 - (1000 \times 0.3) = 700$ rpm.

- 20 %, - 11 % and - 6 % thresholds can be obtained by pressing the teach mode button.


Setting-up

Minimum mounting distances (mm)

Type	Side by side	Face to face
XS9E	$e \geq 40$	$e \geq 80$
XS9C	$e \geq 60$	$e \geq 120$

Dimensions

XS9E, XS9C

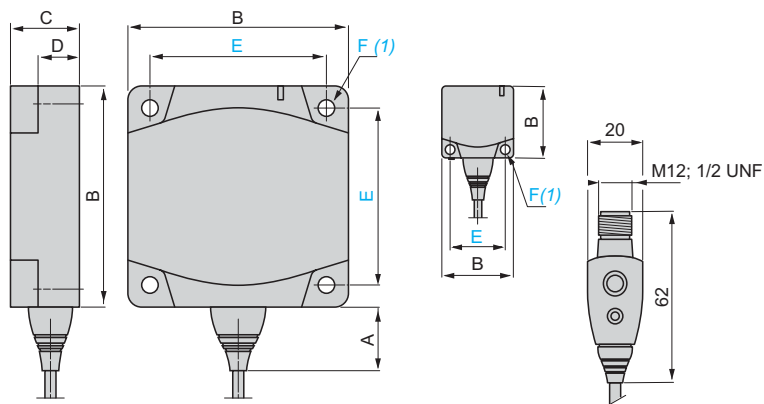

(1) For CHC type screws

Type	A	B	C	D	E	F
XS9E	14	26	13	8.8	20	3.5
XS9C	14	40	15	9.8	33	4.5



Inductive proximity sensors

OsiSense XS Application

Sensors for rotation monitoring, slip detection and shaft overload detection, with teach mode

Flush mountable in metal

PBT case

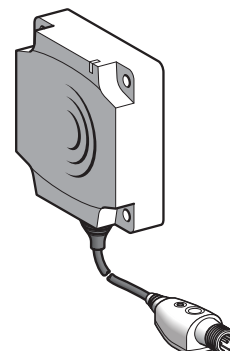

Nominal sensing distance (Sn)	10 mm	15 mm	10 mm	15 mm
Adjustable frequency range	6...6000 impulses/min			

References

3-wire	PNP / NC	XS9E11RPBL01M12	XS9C11RPBL01M12	—	—
2-wire	— or ~ / NC	—	—	XS9E11RMBL01U20	XS9C11RMBL01U20
Weight (kg)		0.040	0.060	0.040	0.060

Characteristics

Product certifications		UL, CSA, CE			
Connection		Remote M12 connector on 0.15 m flying lead		Remote 1/2"-20UNF connector on 0.15 m flying lead	
Operating zone		0...8 mm	0...12 mm	0...8 mm	0...12 mm
Degree of protection	Conforming to IEC 60529	IP 67, double insulation ㉔			
Storage temperature		- 40...+ 85 °C			
Operating temperature		- 25...+ 70 °C			
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)			
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms			
Indicators	Output state	Yellow LED			
	Supply on	Green LED			
Rated supply voltage		--- 12...24 V		~ or --- 24...240 V (50/60 Hz)	
Voltage limits (including ripple)		--- 10...36 V		~ or --- 20...264 V	
Switching capacity		≤ 100 mA (1)	≤ 200 mA (1)	~ or --- 5...100 mA (2)	--- 5...200 mA, ~ 5...300 mA(2)
Voltage drop, closed state		≤ 2 V		≤ 5.5 V	
Residual current, open state		≤ 100 mA		≤ 1.5 mA	
Current consumption, no-load		≤ 10 mA		—	
Maximum switching frequency		48,000 impulses/min			
“Run-up” delay following power-up		9 seconds + 1/Fr			

(1) With overload and short-circuit protection.

(2) It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Wiring schemes


Connector

M12 1/2"-20UNF




3-wire —

XS9E11RPBL01M12




2-wire ~ or —

XS9E11RMBL01U20



Accessory (1)



XSZBPM12

(1) For accessories, see page 3/116.

Description	Reference	Weight kg
Remote control fixing clamp	XSZBPM12	0.015

Inductive proximity sensors

OsiSense XS Application


Sensors with analogue output signal 0...10 V ⁽¹⁾

or 4...20 mA

For position, displacement and deformation control/monitoring

Functions

Example:
Sorting parts



These analogue output proximity sensors are solid-state sensors designed for monitoring displacement. They are not measuring sensors. They are suitable for use in many sectors, particularly for applications involving:


- deformation and displacement monitoring,
- vibration amplitude and frequency monitoring,
- control of dimensional tolerances,
- position control,
- concentricity or eccentricity monitoring.

Operating principle


The operating principle of the sensor is that of a damped oscillator. The degree of damping will depend on the distance of an object from the sensing face. The sensor will sense the distance and produce an output current with a value directly proportional to this distance.

Output curves 4...20 mA, 2-wire connection


XS1M12AB120
Sn = 0.2...2 mm

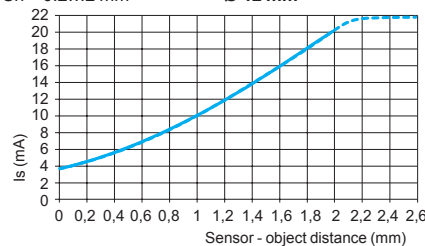


XS1M18AB120
Sn = 0.5...5 mm

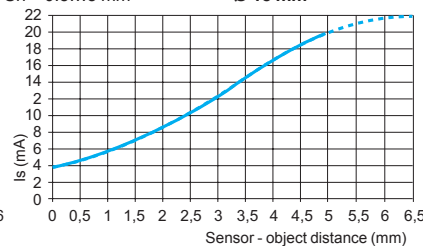


XS1M30AB120
Sn = 1...10 mm

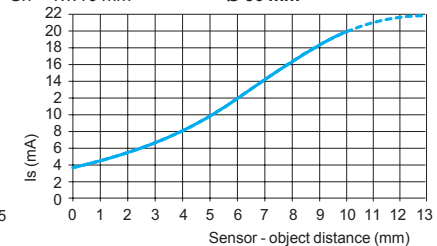


XS4P12AB120
Sn = 0.4...4 mm

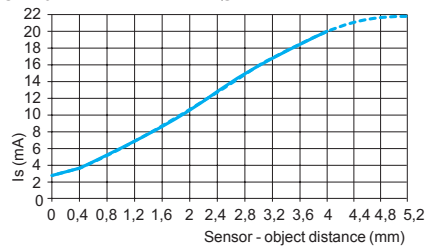

XS4P18AB120
Sn = 0.8...8 mm

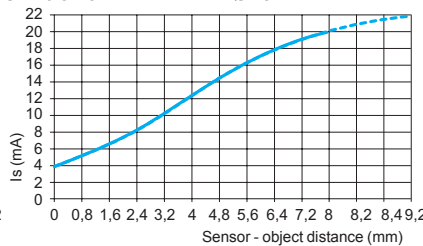


XS4P30AB120
Sn = 1.5...15 mm

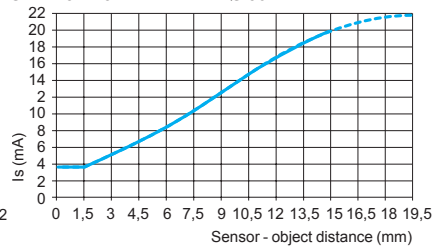


Output curves 0...10 V, 3-wire connection


XS4P12AB110
Sn = 0.4...4 mm

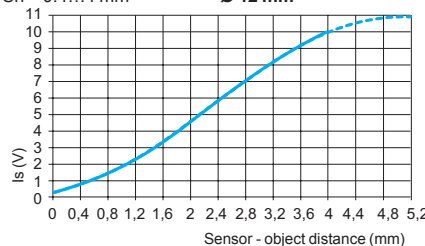

XS4P18AB110
Sn = 0.8...8 mm

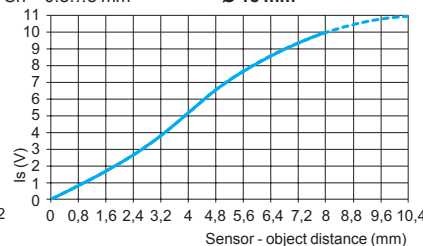


XS4P30AB110
Sn = 1.5...15 mm

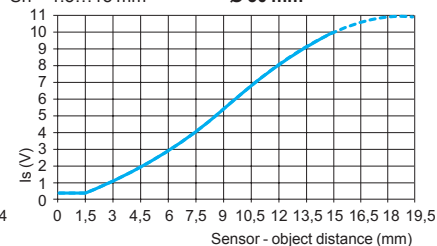

Wiring schemes

2-wire connection




	Output current	Load impedance value
12 V	4...20 mA	$R \leq 8.2 \Omega$
24 V	4...20 mA	$R \leq 470 \Omega$

Ensure a minimum of 10 V between the + and the - (terminal 3) of the sensor.

⁽¹⁾ Voltage range only obtained with a load impedance of 1000 Ω .

3-wire connection



	Output current	Load impedance value	Output voltage	Load impedance value
24 V	0...10 mA	$R \leq 1500 \Omega$	0...10 V	$R = 1000 \Omega$
48 V	0...10 mA	$R \leq 3300 \Omega$	0...10 V	$R = 1000 \Omega$

Ensure a minimum of 5 V between the + and the sensor output (terminal 4).





Inductive proximity sensors

OsiSense XS Application

Sensors with analogue output signal 0...10 V ⁽¹⁾

or 4...20 mA

For position, displacement and deformation control/monitoring

Sensor	Flush mountable in metal	Non flush mountable in metal	
			
Lengths (mm): a = Overall b = Threaded section	a = 50 b = 42	a = 50 b = 42	a = 54 b = 42
Nominal sensing distance (Sn)	Metal case	Plastic case	Plastic case
	2 mm	4 mm	4 mm

References

3-wire ---	Output 0...10 V (2)	—	—	XS4P12AB110
2-wire ---	Output 4...20 mA (2)	XS1M12AB120	XS4P12AB120	—
Weight (kg)		0.075	0.065	0.065





Characteristics

Product certifications	CE, UL, CSA		
Connection	Pre-cabled, PvR 3 x 0.34 mm ² , length 2 m		
Degree of protection Conforming to IEC 60529	IP 67		
Operating zone	0.2...2 mm	0.4...4 mm	0.4...4 mm
Repeat accuracy	± 3 %		
Linearity error	± 2 mA		± 1 V
Ambient air temperature	For operation: - 25...+ 70 °C		
Rated supply voltage	--- 12...24 V	--- 12...24 V	--- 24...48 V
Voltage limits (including ripple)	--- 10...36 V	--- 10...36 V	--- 15...58 V
Output current drift Ambient temperature: - 25...+ 70 °C	≤ 10 %		
Current consumption, no-load	4 mA		
Maximum operating rate	1500 Hz		

(1) Voltage range only obtained with a load impedance of 1000 Ω.





(2) Output current range Is, see page 3/78.

Setting-up

Minimum mounting distances (mm)	Side by side	Face to face	Facing a metal object	Mounted in a metal support
				
XS1M12AB120 flush mountable	e ≥ 4	e ≥ 24	e ≥ 6	d ≥ 12, h ≥ 0
XS4P12AB110 non flush mountable	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36, h ≥ 8
XS4P12AB120 non flush mountable	e ≥ 16	e ≥ 48	e ≥ 12	d ≥ 36, h ≥ 8

Fixing nut tightening torque < 6 N.m (metal case), < 2 N.m (plastic case)

Other versions Please consult our Customer Care Centre.

Sensor	Flush mountable in metal	Non flush mountable in metal	
			
Lengths (mm): a = Overall b = Threaded section c = For non flush mountable sensors	a = 53 b = 44 c = 0	a = 41 b = 26 c = 8	a = 41 b = 26 c = 8
Nominal sensing distance (S _n)	Metal case 5 mm	Plastic case 8 mm	Plastic case 8 mm

References

3-wire --- Output 0...10 V (2)	—	—	XS4P18AB110
2-wire --- Output 4...20 mA (2)	XS1M18AB120	XS4P18AB120	—
Weight (kg)	0.120	0.080	0.080





Characteristics





Product certifications	CE, UL, CSA		
Connection	Pre-cabled, PVR 3 x 0.34 mm ² , length 2 m		
Degree of protection Conforming to IEC 60529	IP 67		
Operating zone	0.5...5 mm	0.8...8 mm	0.8...8 mm
Repeat accuracy	± 3 %		
Linearity error	± 2 mA		± 1 V
Ambient air temperature	For operation: - 25...+ 70 °C		
Rated supply voltage	--- 12...24 V	--- 12...24 V	--- 24...48 V
Voltage limits (including ripple)	--- 10...36 V	--- 10...36 V	--- 15...58 V
Output current drift Ambient temperature: - 25...+ 70 °C	≤ 10 %		
Current consumption, no-load	4 mA		
Maximum operating rate	500 Hz		

(1) Voltage range only obtained with a load impedance of 1000 Ω.

(2) Output current range Is, see page 3/78.

Setting-up

Minimum mounting distances (mm)	Side by side	Face to face	Facing a metal object	Mounted in a metal support
				
XS1M18AB120 flush mountable	$e \geq 10$	$e \geq 60$	$e \geq 15$	$d \geq 18, h \geq 0$
XS4P18AB110 non flush mountable	$e \geq 32$	$e \geq 96$	$e \geq 24$	$d \geq 54, h \geq 16$
XS4P18AB120 non flush mountable	$e \geq 32$	$e \geq 96$	$e \geq 24$	$d \geq 54, h \geq 16$
Fixing nut tightening torque	< 15 N.m (metal case), < 5 N.m (plastic case)			
Other versions	Please consult our Customer Care Centre.			





Sensor	Flush mountable in metal	Non flush mountable in metal	
			
Lengths (mm): a = Overall b = Threaded section c = For non flush mountable sensors	a = 50 b = 42 c = 0	a = 53 b = 32 c = 13	a = 53 b = 32 c = 13
Nominal sensing distance (Sn)	Metal case 10 mm	Plastic case 15 mm	Plastic case 15 mm

References				
3-wire ---	Output 0...10 V (2)	—	—	XS4P30AB110
2-wire ---	Output 4...20 mA (2)	XS1M30AB120	XS4P30AB120	—
Weight (kg)		0.200	0.100	0.100

Characteristics			
Product certifications	CE, UL, CSA		
Connection	Pre-cabled, PvR 3 x 0.34 mm ² , length 2 m		
Degree of protection Conforming to IEC 60529	IP 67		
Operating zone	1...10 mm	1.5...15 mm	1.5...15 mm
Repeat accuracy	± 3 %		
Linearity error	± 2 mA		± 1 V
Ambient air temperature	For operation: - 25...+ 70 °C		
Rated supply voltage	--- 12...24 V	--- 12...24 V	--- 24...48 V
Voltage limits (including ripple)	--- 10...36 V	--- 10...36 V	--- 15...58 V
Output current drift Ambient temperature: - 25...+ 70 °C	≤ 10 %		
Current consumption, no-load	4 mA		
Maximum operating rate	300 Hz		

(1) Voltage range only obtained with a load impedance of 1000 Ω.

(2) Output current range Is, see page 3/78.

Setting-up				
Minimum mounting distances (mm)	Side by side	Face to face	Facing a metal object	Mounted in a metal support
				
XS1M30AB120 flush mountable	e ≥ 20	e ≥ 120	e ≥ 30	d ≥ 30, h ≥ 0
XS4P30AB110 non flush mountable	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90, h ≥ 30
XS4P30AB120 non flush mountable	e ≥ 60	e ≥ 180	e ≥ 45	d ≥ 90, h ≥ 30

Fixing nut tightening torque < 40 N.m (metal case), < 20 N.m (plastic case)

Other versions Please consult our Customer Care Centre.

Inductive proximity sensors

OsiSense XS Application

Sensors with analogue output signal 0...10 V (1)

For position, displacement and deformation control/monitoring

Functions

These analogue output proximity sensors are solid-state sensors designed for monitoring displacement. They are not measuring sensors.

They are suitable for use in many sectors, particularly for applications involving:

- deformation and displacement monitoring,
- vibration amplitude and frequency monitoring,
- control of dimensional tolerances,
- position control,
- concentricity or eccentricity monitoring.


Operating principle

The operating principle of the sensor is that of a damped oscillator. The degree of damping will depend on the distance of an object from the sensing face. The sensor will sense the distance and produce an output current with a value directly proportional to this distance.


3

Output curves 0...10 V, 3-wire connection


XS9F




XS9E



XS9C




XS9D



Wiring schemes


Connector



Pre-cabled

BN: Brown
BU: Blue
BK: Black

3-wire connection



	Output current	Load impedance value	Output voltage	Load impedance value
24 V	0...10 mA	$R \leq 1400 \Omega$	0...10 V	$R = 1000 \Omega$


Note: Ensure a minimum of 5 V between the + (terminal 1) and the sensor output (terminal 4).

(1) Voltage range only obtained with a load impedance of 1000 Ω .

Flush mountable in metal



PBT case

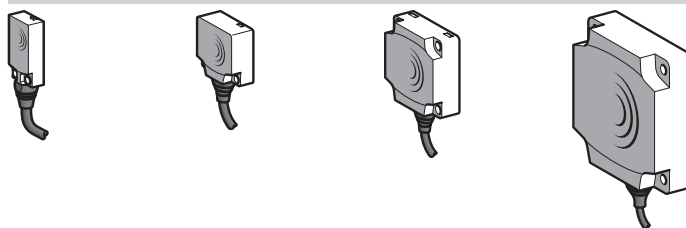

Nominal sensing distance (Sn)	5 mm	10 mm	15 mm	40 mm
-------------------------------	------	-------	-------	-------

References


3-wire --- 0...10 V	Pre-cabled (L = 2 m) (2)	XS9F111A1L2	XS9E111A1L2	XS9C111A1L2	XS9D111A1L2
	Connector	XS9F111A1L01M8	XS9E111A1L01M12	XS9C111A1L01M12	XS9D111A1M12
Weight (kg)	Pre-cabled (L = 2 m) (2)	0.060	0.075	0.095	0.340
	Connector	0.040	0.055	0.075	0.320

Characteristics


Product certifications		UL, CSA, C€		UL, CSA, C€, ECOLAB	
Connection	Pre-cabled	PvR 3 x 0.34 mm², length 2 m for XS9●111A●L2			
	Connector	0.15 m flying lead with M8 connector	0.15 m flying lead with M12 connector		M12
Operating zone		1...5 mm	1...10 mm	2...15 mm	5...40 mm
Degree of protection	Pre-cabled	IP 68	IP 68, double insulation ☐		
Conforming to IEC 60529	Connector	IP 67	IP 67, double insulation ☐		
Storage temperature		- 40...+ 85 °C			
Operating temperature		- 25...+ 70 °C			
Materials		PBT case			
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)			
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms			
Output state indication		No			
Rated supply voltage		--- 24 V			
Voltage limits (including ripple)		--- 15...36 V			
Repeat accuracy		± 3 %			
Linearity error		± 1 V			
Current consumption, no-load		≤ 4 mA with overload and short-circuit protection			
Maximum operating frequency		2000 Hz	1000 Hz	100 Hz	
Output current drift		≤ 10 % (throughout the operating temperature range)			

Dimensions


XS9F




XS9E/C/D



XS9C/D



XS9E



(3) For CHC type screws

Type	A (L2)	A (M12)	B	C	D	E	F
XS9E	14	—	26	13	8.8	20	3.5
XS9C	14	—	40	15	9.8	33	4.5
XS9D	23	14	80	26	16	65	5.5

Setting-up (Minimum mounting distances (mm))

Type	Side by side	Face to face	Facing a metal object
XS9F			
XS9E	e ≥ 15	e ≥ 36	e ≥ 15
XS9C	e ≥ 30	e ≥ 72	e ≥ 30
XS9D	e ≥ 45	e ≥ 110	e ≥ 45
XS9D	e ≥ 120	e ≥ 300	e ≥ 120

(1) Voltage range only obtained with a load impedance of 1000 Ω.

(2) For a 5 m long cable replace L2 by L5, for a 10 m long cable replace L2 by L10.

Example: XS9C111A1L2 becomes **XS9C111A1L5** with a 5 m long cable.

Inductive proximity sensors

OsiSense XS Application

Sensors with analogue output signal 4...20 mA

For position, displacement and deformation control/monitoring

Functions

These analogue output proximity sensors are solid-state sensors designed for monitoring displacement. They are not measuring sensors.

They are suitable for use in many sectors, particularly for applications involving:

- ☐ deformation and displacement monitoring,
- ☐ vibration amplitude and frequency monitoring,
- ☐ control of dimensional tolerances,
- ☐ position control,
- ☐ concentricity or eccentricity monitoring.


Operating principle

The operating principle of the sensor is that of a damped oscillator. The degree of damping will depend on the distance of an object from the sensing face. The sensor will sense the distance and produce an output current with a value directly proportional to this distance.

Output curves 4...20 mA, 2-wire connection


XS9F

Sn = 1...5 mm

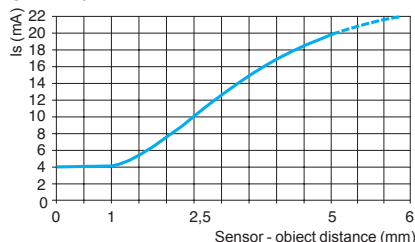


XS9E

Sn = 1...10 mm

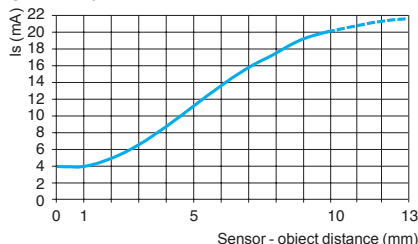


XS9C

Sn = 2...15 mm

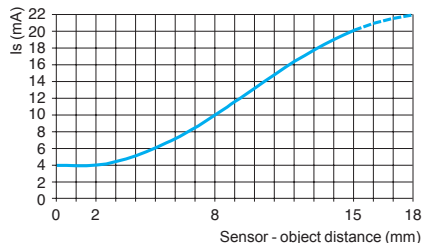

XS9D

Sn = 5...40 mm

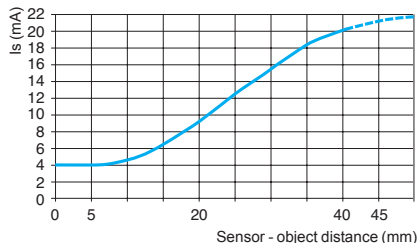

Wiring schemes


Connector



Pre-cabled

BN: Brown
BU: Blue
BK: Black

2-wire connection



	Output current	Load impedance value
12 V	4...20 mA	$R \leq 8.2 \Omega$
24 V	4...20 mA	$R \leq 470 \Omega$

Note: Ensure a minimum of 10 V between the + (terminal 1) and - (terminal 3) of the sensor.

Inductive proximity sensors


OsiSense XS Application

Sensors with analogue output signal 4...20 mA
For position, displacement and deformation
control/monitoring

Flush mountable in metal



PBT case

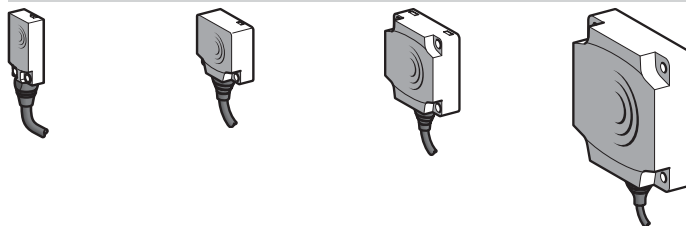

Nominal sensing distance (Sn)	5 mm	10 mm	15 mm	40 mm
-------------------------------	------	-------	-------	-------

References

2-wire ---	Pre-cabled (L = 2 m) (1)	XS9F111A2L2	XS9E111A2L2	XS9C111A2L2	XS9D111A2L2
4...20 mA	Connector	XS9F111A2L01M8	XS9E111A2L01M12	XS9C111A2L01M12	XS9D111A2M12
Weight (kg)	Pre-cabled (L = 2 m)	0.060	0.075	0.095	0.340
	Connector	0.040	0.055	0.075	0.320

Characteristics

Product certifications		UL, CSA, CE		UL, CSA, CE, ECOLAB	
Connection	Pre-cabled	PvR 3 x 0.34 mm², length 2 m for XS9●111A●L2			
	Connector	0.15 m flying lead with M8 connector	0.15 m flying lead with M12 connector		M12
Operating zone		1...5 mm	1...10 mm	2...15 mm	5...40 mm
Degree of protection	Pre-cabled	IP 68	IP 68, double insulation ☐		
Conforming to IEC 60529	Connector	IP 67	IP 67, double insulation ☐		
Storage temperature		- 40...+ 85 °C			
Operating temperature		- 25...+ 60 °C	- 25...+ 70 °C		
Materials		PBT case			
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)			
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms			
Output state indication		No			
Rated supply voltage		--- 12...24 V			
Voltage limits (including ripple)		--- 10...36 V			
Repeat accuracy		± 3 %			
Linearity error		± 2 mA			
Current consumption, no-load		≤ 4 mA with overload and short-circuit protection			
Maximum operating frequency		2000 Hz	1000 Hz	100 Hz	
Output current drift		≤ 10 % (throughout the operating temperature range)			

Dimensions

XS9F

XS9E/C/D

XS9C/D

XS9E

(2) For CHC type screws

Type	A (L2)	A (M12)	B	C	D	E	F
XS9E	14	—	26	13	8.8	20	3.5
XS9C	14	—	40	15	9.8	33	4.5
XS9D	23	14	80	26	16	65	5.5

Setting-up (Minimum mounting distances (mm))

Type	Side by side	Face to face	Facing a metal object
XS9F			
XS9E	e ≥ 15	e ≥ 36	e ≥ 15
XS9C	e ≥ 30	e ≥ 72	e ≥ 30
XS9D	e ≥ 45	e ≥ 110	e ≥ 45
	e ≥ 120	e ≥ 300	e ≥ 120



(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.
Example: XS9F111A2L2 becomes XS9F111A2L5 with a 5 m long cable.

Inductive proximity sensors

OsiSense XS Application

Sensors with analogue output signal 0...10 V ⁽¹⁾
or 4...20 mA. Plastic case, 40 x 40 mm front face
5 position turret head

Sensor	Non flush mountable in metal	
Dimensions	40 x 40 x 70 mm	40 x 40 x 117 mm



Nominal sensing distance (Sn)	25 mm
-------------------------------	-------

References

3-wire	0...10 V output ⁽¹⁾	XS9C2A2A1M12	XS9C4A2A1P20 ⁽²⁾
2-wire	4...20 mA output	XS9C2A2A2M12	XS9C4A2A2P20 ⁽²⁾

XS9C4...P20 sensors are available with an ISO M20 cable entry and can be supplied with a PG 13.5 (e.g. XS9C4A2A1G13) or a 1/2" NPT (e.g. XS9C4A2A2N12) cable entry: please consult our Customer Care Centre for more information.



Weight (kg)	0.149	0.244
-------------	-------	-------

Characteristics

Product certifications	UL, CSA, CE	
Conformity to standards	IEC 60947-5-2 and IEC 60947-5-7	
Connection	M12 connector (4-pin)	Screw terminals, clamping capacity 3 x 1.5 mm ² / 3 x 16 AWG
Operating zone	2...27 mm	
Linearity error	< 3%	
Repeat accuracy	< 3%	
Output current drift	< 5%	
Degree of protection	Conforming to IEC 60529 and DIN 40050	IP 65, IP 67 and IP 69K
Temperature	Storage	-40...+85°C
	Operation ⁽³⁾	-25...+70°C
Material	Case: PBT	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10...55 Hz)
Shock resistance	Conforming to IEC 60068-2-27	50 gn for 11 ms
Indicators	Output state (alignment aid)	Yellow LED
Rated supply voltage	4...20 mA	12...24 V with protection against reverse polarity
	0...10 V	24 V with protection against reverse polarity
Voltage limits (including ripple)	4...20 mA	12...36 V
	0...10 V	15...36 V
Current consumption, no-load	3-wire	< 4 mA
Delays	First-up	< 7 ms
	Response	< 6 ms
	Recovery	< 6 ms

Analogue outputs 4-20 mA and 0-10 V

XS9C2A2A2M12 and XS9C4A2A2P20	XS9C2A2A1M12 and XS9C4A2A1P20
-------------------------------	-------------------------------

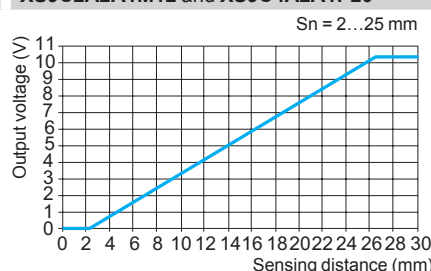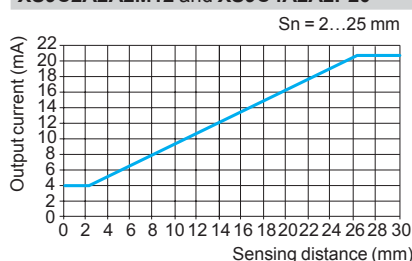

⁽¹⁾ Voltage range only obtained with a load impedance of 1000 Ω.

⁽²⁾ These sensors are supplied without a cable gland. An adaptable PG 13.5 cable gland is available (reference XSZPE13).

⁽³⁾ Sensors are available for very low temperatures (suffix TF: -40°C, +70°C) or very high temperatures (suffix TT: -25°C, +85°C); please consult our Customer Care Centre.


Inductive proximity sensors

OsiSense XS Application

Sensors with analogue output signal 0...10 V ⁽¹⁾
or 4...20 mA. Plastic case, 40 x 40 mm front face
5 position turret head

Setting-up precautions

Minimum mounting distances (mm)



Side by side

Face to face

Facing a metal object

Sensors non flush mountable in metal


$e \geq 120$

$e \geq 240$

$e \geq 90$

Wiring schemes


2-wire



	Output current	Load impedance value
12 V	4...20 mA	$R \leq 82 \Omega$
24 V	4...20 mA	$R \leq 560 \Omega$

Ensure a minimum of 10 V between the + and the - (terminal 3) of the sensor.

3-wire




	Output current	Load impedance value	Output voltage	Load impedance value
12 V	0...10 mA	$R \leq 630 \Omega$	—	—
24 V	0...10 mA	$R \leq 1500 \Omega$	0...10 V	$R = 1000 \Omega$

Ensure a minimum of 5 V between the + and the sensor output (terminal 4).


Dimensions

XS9C2A2A1M12 and XS9C2A2A2M12

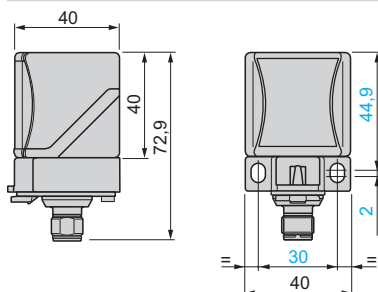


Head positions


XS9C2A2A1M12 and XS9C2A2A2M12

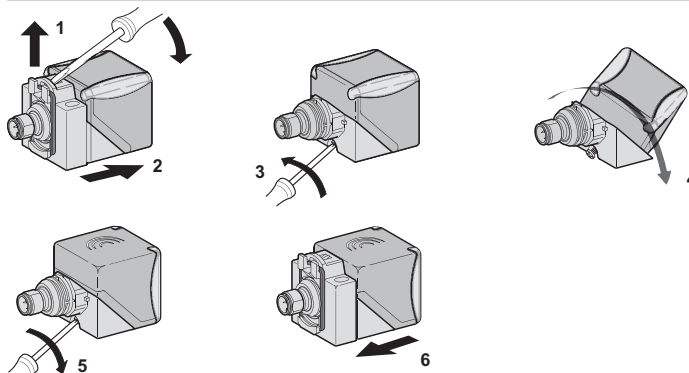

XS9C4A2A1P20 and XS9C4A2A2P20

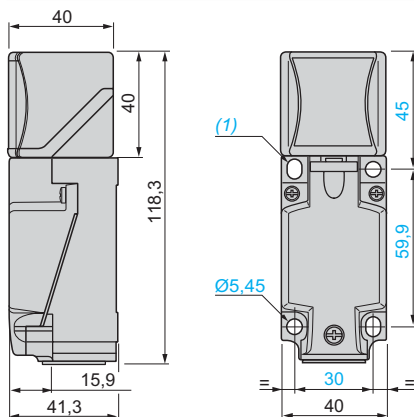

XS9C4A2A1P20 and XS9C4A2A2P20

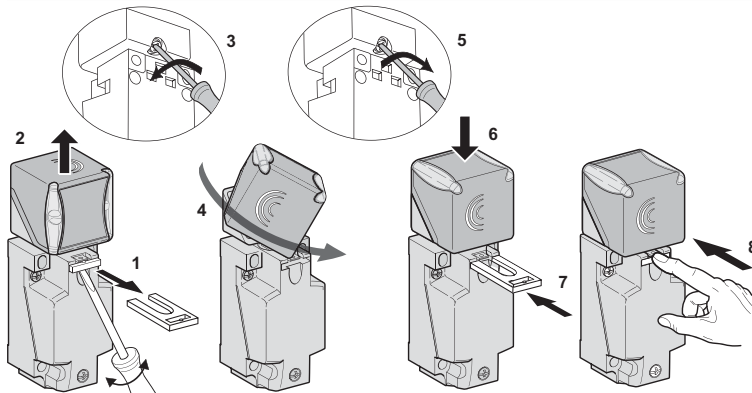

(1) 2 elongated holes Ø 5.3 x 7 mm.

Tightening torque of cover fixing screws and clamp screws: < 1.2 N.m / < 10.62 lb-in

(1) Voltage range only obtained with a load impedance of 1000 Ω.


Inductive proximity sensors

OsiSense XS Application


Cylindrical, stainless steel 316L front face
for food and beverage applications and harsh industrial
environments. Three-wire DC, solid-state output

ECOLAB®


certified




XS912●1PAM12




XS918●1PAM12




XS930●1PAM12

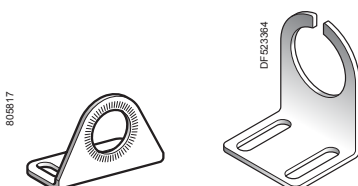

XSZBS30



XZCP1141L●



XZCP1241L●

Ø 12 mm, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{DC}}$, flush mountable					
6	NO	PNP	M12	XS912S1PAM12	0.024

Three-wire 12-24V $\overline{\text{DC}}$, non flush mountable

10	NO	PNP	M12	XS912S4PAM12	0.023
----	----	-----	-----	---------------------	-------

Ø 18 mm, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{DC}}$, flush mountable					
10	NO	PNP	M12	XS918S1PAM12	0.051

Three-wire 12-24V $\overline{\text{DC}}$, non flush mountable

20	NO	PNP	M12	XS918S4PAM12	0.051
----	----	-----	-----	---------------------	-------

Ø 30 mm, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{DC}}$, flush mountable					
20	NO	PNP	M12	XS930S1PAM12	0.140

Three-wire 12-24V $\overline{\text{DC}}$, non flush mountable

40	NO	PNP	M12	XS930S4PAM12	0.145
----	----	-----	-----	---------------------	-------

Accessories

Description	For use with sensor	Reference	Weight kg
Stainless steel mounting bracket	Ø 12	XSZBS12	0.090
	Ø 18	XUZA118	0.190
	Ø 30	XSZBS30	0.370

Connecting cables (PVC) (1)


Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin Stainless steel clamping ring	Straight	2	XZCPA1141L2	0.090
		5	XZCPA1141L5	0.190
		10	XZCPA1141L10	0.370
	Elbowed	2	XZCPA1241L2	0.090
		5	XZCPA1241L5	0.190
		10	XZCPA1241L10	0.370

Wiring schemes

M12 connector



PNP



(1) For further information, please consult the catalogue "Cabling accessories OsiSense XZ" on our site www.tesensors.com.

Inductive proximity sensors

OsiSense XS Application

Cylindrical, stainless steel 316L front face
for food and beverage applications and harsh industrial
environments. Three-wire DC, solid-state output

Characteristics

Sensor type		Flush	XS912S1PAM12		XS918S1PAM12		XS930S1PAM12		
		Non flush	XS912S4PAM12		XS918S4PAM12		XS930S4PAM12		
Product certifications			CE, cULus, ECOLAB						
Connection		Connector	M12						
Operating zone		Flush	mm	0...4.8		0...8		0...16	
		Non flush	mm	0...8		0...16		0...32	
Differential travel			%	1...15 (real sensing distance Sr)					
Degree of protection		Conforming to IEC 60529	IP 68 (5 meters underwater for 1 month)						
		Conforming to DIN 40050	IP 69K						
Storage temperature			°C	-25...+ 85 (-13...185°F)					
Operating temperature			°C	-25...+ 85 (-13...185°F)					
Materials		Case	Stainless steel 316L						
Front face thickness			mm	0.4		0.6		1.0	
Mechanical shock resistance		Conforming to EN 50102	IK10						
Vibration resistance		Conforming to IEC 60068-2-6	25 gn, amplitude ± 1 mm (f = 10 to 55 Hz)						
Shock resistance		Conforming to IEC 60068-2-27	30 gn, duration 11 ms						
Output state indication			Yellow LED, 4 viewing points at 90° (blinking from 0.8 Sr and Sr)						
Rated supply voltage			V	12...24 with protection against reverse polarity					
Voltage limits (including ripple)			V	10...30					
Switching capacity			mA	≤ 200 with overload and short-circuit protection					
Voltage drop, closed state			V	≤ 2					
Current consumption, no-load			mA	≤ 10					
Maximum switching frequency		Flush	Hz	600		300		100	
		Non flush	Hz	400		200		90	
Delays		First set-up	ms	40					
		Response	µs	0.06					
		Recovery	µs	15					

Setting-up

Minimum mounting distances in mm, flush version

Side by side	Face to face	Facing a metal object	Mounted in a metal support
$\varnothing 12$ $e \geq 38$ $\varnothing 18$ $e \geq 42$ $\varnothing 30$ $e \geq 80$	$e \geq 30$ $e \geq 40$ $e \geq 70$	$e \geq 20$ $e \geq 30$ $e \geq 60$	$d \geq 24$ $d \geq 50$ $d \geq 90$

Minimum mounting distances in mm, non flush version

Side by side	Face to face	Facing a metal object	Mounted in a metal support
$\varnothing 12$ $e \geq 108$ $\varnothing 18$ $e \geq 182$ $\varnothing 30$ $e \geq 270$	$e \geq 40$ $e \geq 70$ $e \geq 130$	$e \geq 30$ $e \geq 60$ $e \geq 120$	$d \geq 30$ $h \geq 22$ $d \geq 60$ $h \geq 34$ $d \geq 120$ $h \geq 34$

Dimensions

Lengths (mm):
 a = overall
 b = threaded
 c = for non flush
 mountable sensors

	Flush sensor			Non flush sensor		
	M12	M18	M30	M12	M18	M30
a (mm)	60	63.5	63.5	60	63.5	63.5
b (mm)	41	42	42	36	35	32
c (mm)	0	0	0	5	7	10

Reduction coefficient


Flush-non mounted		Flush sensor			Non flush sensor		
		M12	M18	M30	M12	M18	M30
Steel		1	1	1	1	1	1
Aluminum		1	1	1	1	1	1
Brass		1.3	1.2	1.3	1.4	1.35	1.2
Copper		0.85	0.8	0.9	0.8	0.9	0.9
Stainless steel	Thickness 1 mm	0.5	0.5	0.35	(1)	0.3	(1)
	Thickness 2 mm	0.9	0.9	0.7	0.66	0.6	0.25
Flush mounted		M12	M18	M30	(1) No detection.		
Steel		0.7	0.75	0.9			
Aluminum		1.15	0.9	0.7			
Brass		1.05	0.75	0.6			
Stainless steel		0.8	0.8	1.3			

Inductive proximity sensors


OsiSense XS Application, food and beverage processing series

Cylindrical, stainless steel, non flush mountable


Three-wire DC, solid-state output




XS212SA L2



XS218SA M12




XS2L2SA L2



XS230SA L2



XUZB2005



XSZBS12



XUZA118



XSZBS30

Ø 12, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
7	NO	PNP	Pre-cabled (L = 2 m) (1)	XS212SAPAL2	0.075
			M12 connector	XS212SAPAM12	0.035
		NPN	Pre-cabled (L = 2 m) (1)	XS212SANAL2	0.075
			M12 connector	XS212SANAM12	0.035

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
12	NO	PNP	Pre-cabled (L = 2 m) (1)	XS218SAPAL2	0.120
			M12 connector	XS218SAPAM12	0.060
		NPN	Pre-cabled (L = 2 m) (1)	XS218SANAL2	0.120
			M12 connector	XS218SANAM12	0.060

Ø 18, plain

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
12	NO	PNP	Pre-cabled (L = 2 m) (1)	XS2L2SAPAL2	0.120
			M12 connector	XS2L2SAPAM12	0.060
		NPN	Pre-cabled (L = 2 m) (1)	XS2L2SANAL2	0.120
			M12 connector	XS2L2SANAM12	0.060

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
22	NO	PNP	Pre-cabled (L = 2 m) (1)	XS230SAPAL2	0.205
			M12 connector	XS230SAPAM12	0.145
		NPN	Pre-cabled (L = 2 m) (1)	XS230SANAL2	0.205
			M12 connector	XS230SANAM12	0.145

Accessories (2)

Description	For use with	Reference	Weight kg
Plastic fixing clamp, 24.1 mm centres, with locking screw	Ø 18 sensor, plain case	XUZB2005	0.007
Stainless steel fixing bracket	Ø 12 sensor	XSZBS12	0.060
	Ø 18 sensor	XUZA118	0.045
	Ø 30 sensor	XSZBS30	0.080

Connecting cables

Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin, stainless steel clamping ring	Straight	2	XZCPA1141L2	0.090
		5	XZCPA1141L5	0.210
		10	XZCPA1141L10	0.410
	Elbowed	2	XZCPA1241L2	0.090
		5	XZCPA1241L5	0.210
		10	XZCPA1241L10	0.410
M12 jumper cable Male, 3-pin, stainless steel clamping ring	Straight	2	XZCRA151140A2	0.095
		5	XZCRA151140A5	0.200

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: XS212SAPAL2 becomes XS212SAPAL5 with a 5 m long cable.



(2) For further information, see page 3/116.

Characteristics


Sensor type		XS2...SA...M12	XS2...SA...L2
Product certifications/approvals		UL, CSA, CEC	
Connection	Connector	M12	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 12	mm 0...5.6	
	Ø 18	mm 0...9.6	
	Ø 30	mm 0...17.6	
Differential travel		% 1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529	IP 67	IP 68, double insulation □
	DIN 40050	IP 69K	
Storage temperature		°C - 40...+ 85 (1)	
Operating temperature		°C - 25...+ 85	
Materials	Case	Stainless steel 316 L	
	Cable	—	Non-poisonous PVC, 3 x 0.34 mm ²
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED: 4 viewing ports at 90°	Yellow LED: annular
Rated supply voltage		V — 12...24 with protection against reverse polarity	
Voltage limits (including ripple)		V — 10...36	
Switching capacity		mA ≤ 200 with overload and short-circuit protection	
Voltage drop, closed state		V ≤ 2	
Current consumption, no-load		mA ≤ 10	
Maximum switching frequency	XS212SA...●●●●	Hz 2500	
	XS218SA...●●●● and XS2L2...●●●●	Hz 1000	
	XS230SA...●●●●	Hz 500	
Delays	First-up	ms ≤ 10	
	Response	ms ≤ 0.2 Ø 12, ≤ 0.3 Ø 18, ≤ 0.6 Ø 30	
	Recovery	ms ≤ 0.2 Ø 12, ≤ 0.7 Ø 18, ≤ 1.4 Ø 30	

(1) + 100 °C for cleaning and sterilization phases whilst not in service.

Wiring schemes

Connector	Pre-cabled	PNP	NPN
M12 4 	BU: Blue BN: Brown BK: Black		

Setting-up

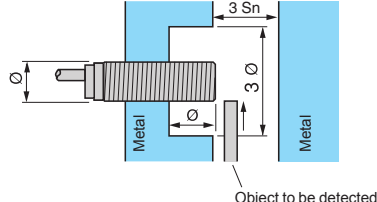Minimum mounting distances (mm)			
			
	Side by side	Face to face	Facing a metal object
	Ø 12 e ≥ 48	e ≥ 84	e ≥ 21
	Ø 18 e ≥ 72	e ≥ 144	e ≥ 36
Ø 30	e ≥ 120	e ≥ 264	e ≥ 66

Dimensions

XS2

Diagram of the XS2 sensor showing dimensions: (1) LED, a, b, c.

(1) LED

XS2	Pre-cabled (mm)		Connector (mm)		
	a	b	a	b	c
Ø 12	54.5	38	61	37	5
Ø 18	60	40	70	42	8
Ø 30	62.5	41	70	36	13

XSZBS12

Diagram of the XSZBS12 sensor showing dimensions: Ø, 7.9, 5.6, 11.1, 25.4, 2.3, Ø12.5, 30.2, 22.4.

XUZA118

Diagram of the XUZA118 sensor showing dimensions: 2.5, 35, 28, Ø18.2, 50, 15, 1, 6.5, 20, 10, 16.5, 6.5.


XSZBS30

Diagram of the XSZBS30 sensor showing dimensions: Ø, 44.45, 3.18, 7.92, 28.6, 38.10, 2.36, Ø32.54, 6.35, 60.33.


Ø: 2 elongated holes Ø 4.8 x 12.7

Inductive proximity sensors


OsiSense Application, food and beverage processing series
Cylindrical, stainless steel, non flush mountable
Two-wire AC or DC



XS218SAM•L2




XS218SAM•U20



XS230SAM•L2



XUZA118



XSZBS30

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
12	NO	Pre-cabled (L = 2 m) (1)	XS218SAMAL2	0.120
		1/2"-20UNF connector	XS218SAMAU20	0.060

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
22	NO	Pre-cabled (L = 2 m) (1)	XS230SAMAL2	0.205
		1/2"-20UNF connector	XS230SAMAU20	0.145

Connecting cables

Description	Type	Length m	Reference	Weight kg
Pre-wired connectors 1/2"-20UNF 3-pin female, stainless steel clamping ring	Straight	5	XZCPA1865L5	0.210
		10	XZCPA1865L10	0.410
	Elbowed	5	XZCPA1965L5	0.250
		10	XZCPA1965L10	0.485

Accessories

Description	For use with	Reference	Weight kg
Stainless steel fixing brackets	Ø 18 sensor	XUZA118	0.045
	Ø 30 sensor	XSZBS30	0.080

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.
Example: **XS218SAMAL2** becomes **XS218SAMAL5** with a 5 m long cable.

Characteristics

Sensor type		XS2●●SAM●U20	XS2●●SAM●L2
Product certifications/approvals		UL, CSA, CEC	
Connection	Connector	1/2"-20UNF	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 18	mm 0...9.6	
	Ø 30	mm 0...17.6	
Differential travel		% 1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529	IP 67	IP 68, double insulation □
	DIN 40050	IP 69K	
Storage temperature		°C - 40...+ 85 (1)	
Operating temperature		°C - 25...+ 85	
Materials	Case	Stainless steel 316 L	
	Cable	—	Non-poisonous PVC, 2 x 0.34 mm ²
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED: 4 viewing ports at 90°	Yellow LED: annular
Rated supply voltage		V ~ or — 24...240 (~ 50/60 Hz)	
Voltage limits (including ripple)		V ~ or — 20...264	
Switching capacity		mA ~ 5...300 or — 5...200 (2)	
Voltage drop, closed state		V ≤ 5.5	
Residual current, open state		mA ≤ 0.8	
Maximum switching frequency	XS218SAM●●●	Hz ~ 25 or — 1000	
	XS230SAM●●●	Hz ~ 25 or — 300	
Delays	First-up	ms ≤ 30	
	Response	ms ≤ 0.5	
	Recovery	ms ≤ 0.5 XS218SAM●●●, ≤ 2 XS230SAM●●●	

(1) + 100 °C for cleaning and sterilization phases whilst not in service.

(2) It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Wiring schemes

Connector

1/2"-20UNF



AC/DC: 2
± : 1
AC/DC: 3

Pre-cabled

BU: Blue
BN: Brown

2-wire ~ or —



NO output



±: on connector models only


Setting-up

Minimum mounting distances (mm)

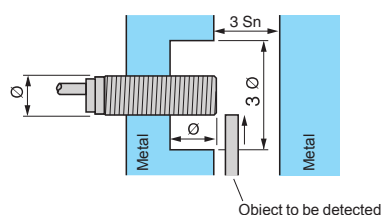


Side by side

Ø 18
e ≥ 72
Ø 30
e ≥ 120



Face to face

e ≥ 144
e ≥ 264




Facing a metal object

e ≥ 36
e ≥ 66

Dimensions



XS2




(1) LED

	Pre-cabled (mm)		Connector (mm)		
XS2	a	b	a	b	c
Ø 18	60	40	72	44	8
Ø 30	62.5	41	74	40	13

XSZA118



XSZBS30

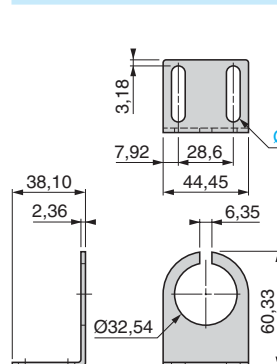


Ø: 2 elongated holes Ø 7.14 x 29.36

Inductive proximity sensors


OsiSense Application, food and beverage processing series

Cylindrical, plastic, non flush mountable


Three-wire DC, solid-state output




XS212AAAL2



XS218AAM12



XS230AAL2



XSZB112

Ø 12, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
7	NO	PNP	Pre-cabled (L = 2 m) (1)	XS212AAPAL2	0.065
			M12 connector	XS212AAPAM12	0.030
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS212AANAL2	0.065
			M12 connector	XS212AANAM12	0.030

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
12	NO	PNP	Pre-cabled (L = 2 m) (1)	XS218AAPAL2	0.100
			M12 connector	XS218AAPAM12	0.040
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS218AANAL2	0.100
			M12 connector	XS218AANAM12	0.040

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
22	NO	PNP	Pre-cabled (L = 2 m) (1)	XS230AAPAL2	0.140
			M12 connector	XS230AAPAM12	0.080
	NPN	PNP	Pre-cabled (L = 2 m) (1)	XS230AANAL2	0.140
			M12 connector	XS230AANAM12	0.080

Accessories (2)

Description		Reference	Weight kg
Fixing clamps	Ø 12	XSZB112	0.006
	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

Connecting cables

Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin, stainless steel clamping ring	Straight	2	XZCPA1141L2	0.090
		5	XZCPA1141L5	0.190
		10	XZCPA1141L10	0.370
	Elbowed	2	XZCPA1241L2	0.090
		5	XZCPA1241L5	0.190
		10	XZCPA1241L10	0.370
M12 jumper cable Male, 3-pin, stainless steel clamping ring	Straight	2	XZCRA151140A2	0.090
		5	XZCRA151140A5	0.190

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.

Example: **XS212AAPAL2** becomes **XS212AAPAL5** with a 5 m long cable.

(2) For further information, see page 3/116.


Characteristics

Sensor type		XS2●●AA●●M12	XS2●●AA●●L2
Product certifications/approvals		UL, CSA, CEC	
Connection	Connector	M12	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 12	mm	0...5.6
	Ø 18	mm	0...9.6
	Ø 30	mm	0...17.6
Differential travel		1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529	IP 67	IP 68, double insulation □
	DIN 40050	IP 69K	
Storage temperature		°C - 40...+ 85	
Operating temperature		°C - 25...+ 85	
Materials	Case	PPS	
	Cable	—	PvR and 3 x 0.34 mm ²
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED: annular	
Rated supply voltage		V — 12...48 for T - 25...+ 85 °C	
Voltage limits (including ripple)		V — 10...58 for T - 25...+ 85 °C	
Switching capacity		mA ≤ 200 with overload and short-circuit protection	
Voltage drop, closed state		V ≤ 2	
Current consumption, no-load		mA ≤ 10	
Maximum switching frequency	XS212AA●●●●	Hz	2500
	XS218AA●●●●	Hz	1000
	XS230AA●●●●	Hz	500
Delays	First-up	ms	≤ 10
	Response	ms	≤ 0.2 Ø 12, ≤ 0.3 Ø 18, ≤ 0.6 Ø 30
	Recovery	ms	≤ 0.2 Ø 12, ≤ 0.7 Ø 18, ≤ 1.4 Ø 30

Wiring schemes

Connector	Pre-cabled	PNP	NPN
M12 4 3 1 2	BU: Blue BN: Brown BK: Black		


Setting-up

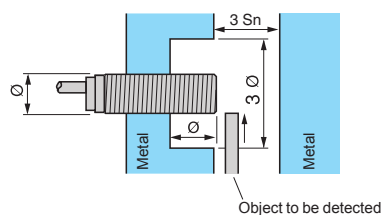

Minimum mounting distances (mm)

	Side by side	Face to face	Facing a metal object
Ø 12	e ≥ 48	e ≥ 84	e ≥ 21
Ø 18	e ≥ 72	e ≥ 144	e ≥ 36
Ø 30	e ≥ 120	e ≥ 264	e ≥ 66

Dimensions




XS2


	Pre-cabled (mm)		Connector (mm)	
XS2	a	b	a	b
Ø 12	50	42	61	43
Ø 18	60	51	70	52
Ø 30	60	51	70	52

Inductive proximity sensors


OsiSense XS Application, food and beverage processing series
Cylindrical, plastic, non flush mountable
Two-wire AC or DC




XS218AAM L2



XS230AAM U20



XS230AAM L2



XSZB1

Ø 18, threaded M18 x 1

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
12	NO	Pre-cabled (L = 2 m) (1)	XS218AAMAL2	0.100
		1/2"-20UNF connector	XS218AAMAU20	0.040

Ø 30, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Connection	Reference	Weight kg
22	NO	Pre-cabled (L = 2 m) (1)	XS230AAMAL2	0.140
		1/2"-20UNF connector	XS230AAMAU20	0.080

Accessories (2)

Description		Reference	Weight kg
Fixing clamps	Ø 18	XSZB118	0.010
	Ø 30	XSZB130	0.020

Connecting cables

Description	Type	Length m	Reference	Weight kg
Pre-wired connectors 1/2"-20UNF 3-pin female, stainless steel 316 L clamping ring	Straight	5	XZCPA1865L5	0.180
		10	XZCPA1865L10	0.350
	Elbowed	5	XZCPA1965L5	0.180
		10	XZCPA1965L10	0.350

(1) For a 5 m long cable replace L2 by L5; for a 10 m long cable replace L2 by L10.
Example: XS218AAMAL2 becomes XS218AAMAL5 with a 5 m long cable.


(2) For further information, see page 3/116.

Characteristics





Sensor type		XS2●●AAM●U20	XS2●●AAM●L2
Product certifications/approvals		UL, CSA, CEC	
Connection	Connector	1/2"-20UNF	—
	Pre-cabled	—	Length: 2 m
Operating zone	Ø 18	mm 0...9.6	
	Ø 30	mm 0...17.6	
Differential travel		1...15 of effective sensing distance (Sr)	
Degree of protection	Conforming to IEC 60529	IP 67	IP 68, double insulation □
	DIN 40050	IP 69K	
Storage temperature		°C - 40...+ 85	
Operating temperature		°C - 25...+ 85	
Materials	Case	PPS	
	Cable	—	PvR and 2 x 0.34 mm ²
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms	
Output state indication		Yellow LED: annular	
Rated supply voltage		V ~ or — 24...240 (~ 50/60 Hz)	
Voltage limits (including ripple)		V ~ or — 20...264	
Switching capacity		mA ~ 5...300 or — 5...200 (1)	
Voltage drop, closed state		V ≤ 5.5	
Residual current, open state		mA ≤ 0.8	
Maximum switching frequency	XS218AAM●●●	Hz ~ 25 or — 1000	
	XS230AAM●●●	Hz ~ 25 or — 300	
Delays	First-up	ms ≤ 30	
	Response	ms ≤ 0.5	
	Recovery	ms ≤ 0.5 XS218AAM●●●, ≤ 2 XS230AAM●●●	

(1) It is essential to connect a 0.4 A "quick-blow" fuse in series with the load.

Wiring schemes


Connector	Pre-cabled	2-wire ~ or —
1/2"-20UNF	BU: Blue BN: Brown	NO output
		

Setting-up

Minimum mounting distances (mm)			
			
Side by side	Face to face	Facing a metal object	
Ø 18 e ≥ 72	e ≥ 144	e ≥ 36	
Ø 30 e ≥ 120	e ≥ 264	e ≥ 66	

Dimensions

XS2



(1) LED

XS2	Pre-cabled (mm)		Connector (mm)	
	a	b	a	b
Ø 18	60	51	70	52
Ø 30	60	51	70	52


Inductive proximity sensors

OsiSense XS Application


Cylindrical, stainless steel 303 front face

for harsh industrial environments


Three-wire DC, solid-state output




XS908●1PAM12




XS912●1PAM12




XS918●1PAM12



XS930●1PAM12



XZCP1141L●



XZCP1241L●

Ø 8 mm, threaded M8 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{V}}$, flush mountable					
3	NO	PNP	M12	XS908R1PAM12	0.018

Three-wire 12-24V $\overline{\text{V}}$, non flush mountable

6	NO	PNP	M12	XS908R4PAM12	0.018
---	----	-----	-----	--------------	-------

Ø 12 mm, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{V}}$, flush mountable					
6	NO	PNP	M12	XS912R1PAM12	0.024

Three-wire 12-24V $\overline{\text{V}}$, non flush mountable

10	NO	PNP	M12	XS912R4PAM12	0.023
----	----	-----	-----	--------------	-------

Ø 18 mm, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{V}}$, flush mountable					
10	NO	PNP	M12	XS918R1PAM12	0.044

Three-wire 12-24V $\overline{\text{V}}$, non flush mountable

20	NO	PNP	M12	XS918R4PAM12	0.051
----	----	-----	-----	--------------	-------

Ø 30 mm, threaded M30 x 1.5

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{V}}$, flush mountable					
20	NO	PNP	M12	XS930R1PAM12	0.140

Three-wire 12-24V $\overline{\text{V}}$, non flush mountable

40	NO	PNP	M12	XS930R4PAM12	0.144
----	----	-----	-----	--------------	-------


Connecting cables (PUR) ⁽¹⁾

Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin Metal clamping	Straight	2	XZCP1141L2	0.090
		5	XZCP1141L5	0.190
		10	XZCP1141L10	0.370
	Elbowed	2	XZCP1241L2	0.090
		5	XZCP1241L5	0.190
		10	XZCP1241L10	0.370

Wiring schemes

M12 connector

PNP



(1) For further information, please consult the catalogue "Cabling accessories OsiSense XZ", on our site www.tesensors.com.

Characteristics

Sensor type	Flush	XS908R1PAM12	XS912R1PAM12	XS918R1PAM12	XS930R1PAM12
	Non flush	XS908R4PAM12	XS912R4PAM12	XS918R4PAM12	XS930R4PAM12
Product certifications		CE, cULus			
Connection	Connector	M12			
Operating zone	Flush	mm 0...2.4	0...4.8	0...8	0...16
	Non flush	mm 0...4.8	0...8	0...16	0...32
Differential travel		% 1...15 (real sensing distance Sr)			
Degree of protection	Conforming to IEC 60529	IP 67			
	Conforming to DIN 40050	IP 69K			
Storage temperature		°C -25...+ 70 (-13...158°F)			
Operating temperature		°C -25...+ 70 (-13...158°F)			
Materials	Case	Stainless steel, 303 grade			
Front face thickness		mm 0.25	0.4	0.6	1.0
Mechanical shock resistance	Conforming to EN 50102	IK10			
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 1 mm (f = 10 to 55 Hz)			
Shock resistance	Conforming to IEC 60068-2-27	30 gn, duration 11 ms			
Output state indication		Yellow LED, 4 viewing points at 90° (blinking from 0.8 Sr and Sr)			
Rated supply voltage		V --- 12...24 with protection against reverse polarity			
Voltage limits (including ripple)		V --- 10...30			
Switching capacity		mA ≤ 200 with overload and short-circuit protection			
Voltage drop, closed state		V ≤ 2			
Current consumption, no-load		mA ≤ 10			
Maximum switching frequency	Flush	Hz 1000	600	300	100
	Non flush	Hz 700	400	200	90
Delays	First set-up	ms 40			
	Response	µs 0.05	0.06		
	Recovery	µs 23	15		

Setting-up

Minimum mounting distances in mm, flush version

Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 8 e ≥ 14 Ø 12 e ≥ 38 Ø 18 e ≥ 42 Ø 30 e ≥ 80	e ≥ 15 e ≥ 30 e ≥ 40 e ≥ 70	e ≥ 10 e ≥ 20 e ≥ 30 e ≥ 60	d ≥ 12 d ≥ 24 d ≥ 50 d ≥ 90

Minimum mounting distances in mm, non flush version

Side by side	Face to face	Facing a metal object	Mounted in a metal support
Ø 8 e ≥ 52 Ø 12 e ≥ 108 Ø 18 e ≥ 182 Ø 30 e ≥ 270	e ≥ 25 e ≥ 40 e ≥ 70 e ≥ 130	e ≥ 20 e ≥ 30 e ≥ 60 e ≥ 120	d ≥ 20 h ≥ 15 d ≥ 30 h ≥ 22 d ≥ 60 h ≥ 34 d ≥ 120 h ≥ 34

Dimensions

		Flush sensor				Non flush sensor			
		M8	M12	M18	M30	M8	M12	M18	M30
	a (mm)	66	60	63.5	63.5	66	60	63.5	63.5
	b (mm)	46	41	42	42	42	36	35	32
	c (mm)	0	0	0	0	4	5	7	10

Reduction coefficient

Non flush mounted		Flush sensor				Non flush sensor			
		M8	M12	M18	M30	M8	M12	M18	M30
Steel		1	1	1	1	1	1	1	1
Aluminum		1	1	1	1	1	1	1	1
Brass		1.35	1.3	1.2	1.3	1.4	1.4	1.35	1.2
Copper		0.9	0.85	0.8	0.9	0.85	0.8	0.9	0.9
Stainless steel	Thickness 1 mm	0.3	0.5	0.5	0.35	0.3	(1)	0.3	(1)
	Thickness 2 mm	0.6	0.9	0.9	0.7	0.9	0.66	0.6	0.25
Flush mounted		M8	M12	M18	M30	(1) No detection.			
Steel		1	0.7	0.75	0.9				
Aluminum		0.9	1.15	0.9	0.7				
Brass		0.9	1.05	0.75	0.6				
Stainless steel		1	0.8	0.8	1.3				

Inductive proximity sensors


OsiSense XS Application

For assembly, packaging and light material handling

Plastic case, 12 x 26 x 40 mm

DC supply, solid-state output

Sensor	Flush mountable in metal	Non flush mountable in metal
--------	--------------------------	------------------------------

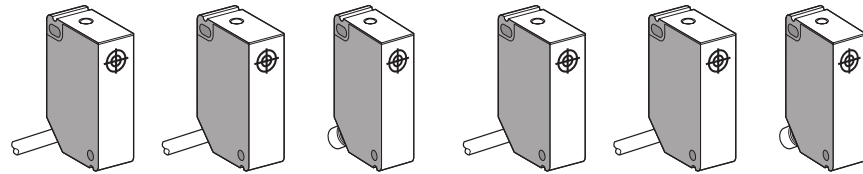

Nominal sensing distance (S _n)	2 mm	4 mm
--	------	------

References

3-wire ---	PNP NO	XS7G12PA140	—	XS7G12PA140S	XS8G12PA140	—	XS8G12PA140S
	NPN NO	XS7G12NA140	—	XS7G12NA140S	XS8G12NA140	—	XS8G12NA140S
4-wire --- (complementary outputs)	PNP NO + NC	—	XS7G12PC440	—	—	XS8G12PC440	—
	NPN NO + NC	—	XS7G12NC440	—	—	XS8G12NC440	—
Weight (kg)		0.100	0.100	0.030	0.100	0.100	0.030

Characteristics

Product certifications		CSA, UL, CE					
Connection	Pre-cabled	3 x 0.34 mm ² , length 2 m (1)	4 x 0.34 mm ² , length 2 m (1)	—	3 x 0.34 mm ² , length 2 m (1)	4 x 0.34 mm ² , length 2 m (1)	—
	Connector	—	—	M8	—	—	M8
Operating zone		0...1.6 mm			0...3.2 mm		
Repeat accuracy		≤ 10 % of Sr					
Differential travel		3...20 % of Sr					
Degree of protection		IP 67					
Storage temperature		- 40...+ 85 °C					
Operating temperature		- 25...+ 70 °C					
Materials		Case: PBT, cable: PVC					
Vibration resistance Conforming to IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)					
Shock resistance Conforming to IEC 60068-2-27		50 gn, duration 11 ms					
Output state indication		Yellow LED (on top of case)					
Rated supply voltage		≡ 12...24 V	≡ 12...48 V	≡ 12...24 V	≡ 12...24 V	≡ 12...48 V	≡ 12...24 V
Voltage limits (including ripple)		≡ 10...30 V	≡ 10...58 V	≡ 10...30 V	≡ 10...30 V	≡ 10...58 V	≡ 10...30 V
Current consumption, no-load		≤ 10 mA					
Switching capacity		0...100 mA (2)	0...200 mA (2)	0...100 mA (2)	0...100 mA (2)	0...200 mA (2)	0...100 mA (2)
Voltage drop, closed state		≤ 1.8 V	≤ 2.6 V	≤ 1.8 V	≤ 1.8 V	≤ 2.6 V	≤ 1.8 mA
Maximum switching frequency		≤ 2 kHz			≤ 1 kHz		
Delays	First-up	≤ 4 ms					
	Response	≤ 0.5 ms					
	Recovery	≤ 1 ms					

(1) Sensors available with other cable lengths:


Length of cable	Suffix to be added to references stated above for 2 m pre-cabled sensors	Weight increase
5 m	L1	0.120 kg
10 m	L2	0.320 kg

Example: sensor XS7G12PA140 with 5 m long cable becomes XS7G12PA140L1.


(2) With overload and short-circuit protection

Dimensions

XS● G12●A140, XS● G12●C440



Rear view




(1) 1 elongated hole Ø 3.1 x 5.1.


(2) Cable L = 2 m.

(3) 2 holes M3 x 5.

XS● G12●A140S



Rear view






(1) 1 elongated hole Ø 3.1 x 5.1.

(2) 2 holes M3 x 5.

Setting-up


Minimum mounting distances (mm)




	Side by side	Face to face	Facing a metal object and mounting in a metal support
XS7G flush mountable	$e \geq 0$	$e \geq 15$	$e \geq 6$
XS8G non flush mountable	$e \geq 10$	$e \geq 60$	$e \geq 12$

Wiring schemes

3-wire ---, NO output

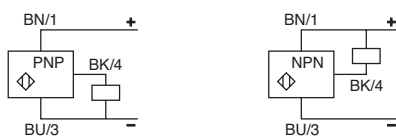

4-wire ---, NO + NC output

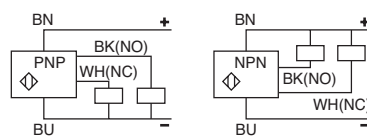

Connector





Détecteurs de proximité inductifs

OsiSense XS Application

Pour assemblage, emballage et petite manutention

Boîtier en plastique 12 x 26 x 40 mm

Alimentation en courant alternatif ou continu

Appareils		Noyables dans le métal	Non noyables dans le métal
			
Portée nominale (Sn)		2 mm	4 mm
Références			
2 fils $\overline{\text{---}}$ ou $\sim$	NO	XS7G12MA230	XS8G12MA230
	NC	XS7G12MB230	XS8G12MB230
Masse (kg)		0,100	0,100
Caractéristiques			
Certifications de produits		CSA, UL, CE	
Mode de raccordement		Par câble 2 x 0,34 mm ² , longueur 2 m (1)	
Domaine de fonctionnement		0...1,6 mm	0...3,2 mm
Reproductibilité		≤ 10 % de Sr	
Hystérésis		3...20 % de Sr	
Degré de protection		IP 67	
Température de stockage		- 40...+ 85 °C	
Température de fonctionnement		- 25...+ 70 °C	
Matériaux		Boîtier : PBT, câble : PVC	
Tenue aux vibrations Selon IEC 60068-2-6		25 gn, amplitude ± 2 mm (f = 10 à 55 Hz)	
Tenue aux chocs Selon IEC 60068-2-27		50 gn, durée 11 ms	
Signalisation d'état de sortie		DEL jaune (sur partie supérieure)	
Tension assignée d'alimentation		$\sim$ 24...240 V (50/60 Hz) ou $\overline{\text{---}}$ 24...210 V	
Limites de tension (ondulation comprise)		$\sim$ ou $\overline{\text{---}}$ 20...264 V	
Courant commuté		5...200 mA (2)	
Tension de déchet, état fermé		≤ 5,5 V	
Courant résiduel, état ouvert		≤ 0,8 mA / 24 V, 1,5 mA / 120 V	
Fréquence maximale de commutation		$\sim$ 25 Hz ou $\overline{\text{---}}$ 250 Hz	
Retards	A la disponibilité	≤ 40 ms	
	A l'action	≤ 1 ms	
	Au relâchement	≤ 2 ms	

(1) Détecteurs avec autres longueurs de câble :

Longueur de câble	Repère à ajouter en fin de référence du détecteur choisi avec câble de 2 m	Masse augmentée de
5 m	L1	0,120 kg
10 m	L2	0,320 kg


Exemple : détecteur **XS7G12MA230** avec câble de 5 m devient **XS7G12MA230L1**.

(2) Ces détecteurs n'étant pas protégés contre les surcharges et les courts-circuits, il est impératif de mettre, en série avec la charge, un fusible à action rapide de 0,4 A.

Encombremments

XS●G12M●230

Vue arrière

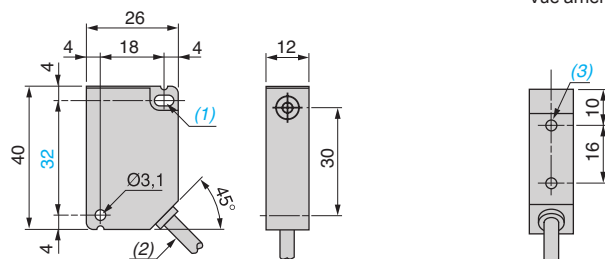




(1) 1 trou oblong 3,1 x 5,1.

(2) Câble L = 2 m.

(3) 2 trous M3 x 5.

Précautions de mise en œuvre


Distances à respecter au montage (mm)



	Côte à côte	Face à face	Face à masse métallique et montage dans support métallique
XS7G noyable	$e \geq 0$	$e \geq 15$	$e \geq 6$
XS8G non noyable	$e \geq 10$	$e \geq 60$	$e \geq 12$

Raccordements

Type 2 fils ~ ou ---, sortie NO ou NC



Inductive proximity sensors


OsiSense XS Application

Flat sensor, flush mountable, increased range, switching capacity 300 mA

80 x 80 x 40 format, DIN rail mounting, solid-state output

Sensor

Flush mountable in metal



Dimensions (mm)		80 x 80 x 40
Nominal sensing distance (S _n)		50 mm (not flush mounted: 42 mm)
Reference		
2-wire  (non polarised)	NO	XS7D1A3CAM12DIN
Weight (kg)		0.374
Characteristics		
Product certifications		CE
Degree of protection	Conforming to IEC 60529	IP 67, double insulation 
Temperature	Operating	- 25...+ 70 °C
	Storage	- 40...+ 85 °C
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10 to 55 Hz)
Shock resistance	Conforming to IEC 60068-2-27	50 gn, duration 11 ms
Connection		M12 connector
Operating zone		0...40 mm (not flush mounted: 0...35 mm)
Repeat accuracy		3 % of S _r
Differential travel		1...15 % of S _r
Output state indication		Yellow LED
Rated supply voltage		 12...48 V with protection against reverse polarity
Voltage limits (including ripple)		 10...58 V
Residual current, open state		≤ 0.5 mA
Switching capacity		1.5...300 mA with overload and short-circuit protection
Voltage drop, closed state		≤ 4.5 V
Maximum switching frequency		100 Hz
Delays	First-up	≤ 10 ms
	Response	≤ 2 ms
	Recovery	≤ 5 ms

Inductive proximity sensors


OsiSense XS Application

Flat sensor, flush mountable, increased range, switching capacity 300 mA

80 x 80 x 40 format, DIN rail mounting, solid-state output

Dimensions

XS7D1A3CAM12DIN

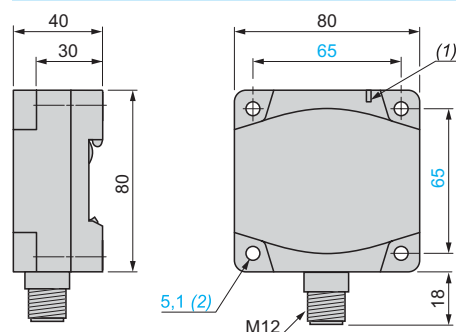


(1) *Output LED*

(2) For CHC type screws


Setting-up

Minimum mounting distances (mm)


Face to face




Side by side



Back to back





Facing a metal object



Flush mounted	450	140	90	150
Not flush mounted	450	180	180	150

Flush/non flush conditions


In A37 steel



Sn	Su	Sn	Su
42 mm	35 mm	50 mm	40 mm

Wiring schemes

2-wire NO/M12 XS7D1A3CAM12DIN




Inductive proximity sensors


OsiSense XS Application

Cylindrical, stainless steel 303 front face
for welding environments


Three-wire DC, solid-state output




XS912RWPAM12



XS918RWPAM12



XZCP1141L●



XZCP1241L●

Ø 12 mm, threaded M12 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{V}}$, flush mountable					
6	NO	PNP	M12	XS912RWPAM12	0.024

Ø 18 mm, threaded M18 x 1

Sensing distance (Sn) mm	Function	Output	Connection	Reference	Weight kg
Three-wire 12-24V $\overline{\text{V}}$, flush mountable					
10	NO	PNP	M12	XS918RWPAM12	0.051

Connecting cables (PUR) ⁽¹⁾


Description	Type	Length m	Reference	Weight kg
Pre-wired M12 connectors Female, 4-pin Metal clamping ring	Straight	2	XZCP1141L2	0.090
		5	XZCP1141L5	0.190
		10	XZCP1141L10	0.370
	Elbowed	2	XZCP1241L2	0.090
		5	XZCP1241L5	0.190
		10	XZCP1241L10	0.370

Wiring schemes

M12 connector



PNP



(1) For further information, please consult the catalogue "Cabling accessories OsiSense XZ" on our site www.tesensors.com.

Characteristics

Sensor type	Flush	XS912RWPAM12	XS918RWPAM12
Product certifications		CE, cULus	
Connection	Connector	M12	
Operating zone		mm	0...4.8
Differential travel		%	1...15 (real sensing distance Sr)
Degree of protection	Conforming to IEC 60529	IP 68 (5 meters underwater for 1 month)	
	Conforming to DIN 40050	IP 69K	
Storage temperature		°C	-25...+70 (-13...158°F)
Operating temperature		°C	-25...+70 (-13...158°F)
Materials	Case	Stainless steel, 303 grade	
Front face thickness		mm	0.4
Mechanical shock resistance	Conforming to EN 50102	IK10	
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 1 mm (f = 10 to 55 Hz)	
Shock resistance	Conforming to IEC 60068-2-27	30 gn, duration 11 ms	
Output state indication		Yellow LED, 4 viewing points at 90° (blinking from 0.8 Sr and Sr)	
Rated supply voltage		V	12...24 with protection against reverse polarity
Voltage limits (including ripple)		V	10...30
Switching capacity		mA	≤ 200 with overload and short-circuit protection
Voltage drop, closed state		V	≤ 2
Current consumption, no-load		mA	≤ 10
Maximum switching frequency		Hz	15
Delays	First set-up	ms	80
	Response	µs	100
	Recovery	µs	15

Setting-up

Minimum mounting distances in mm, flush version


Side by side

$$\begin{matrix} \varnothing 12 & e \geq 38 \\ \varnothing 18 & e \geq 42 \end{matrix}$$




Face to face

$$\begin{matrix} e \geq 30 \\ e \geq 40 \end{matrix}$$




Facing a metal object

$$\begin{matrix} e \geq 20 \\ e \geq 30 \end{matrix}$$




Mounted in a metal support

$$\begin{matrix} d \geq 24 \\ d \geq 50 \end{matrix}$$



Dimensions



Lengths (mm):
a = overall
b = threaded
c = for non flush
mountable sensors

Flush sensor

	M12	M18
a (mm)	60	63.5
b (mm)	41	42
c (mm)	0	0

Reduction coefficient

Non flush mounted

Steel
Aluminum
Brass
Copper
Stainless steel

Thickness 1 mm
Thickness 2 mm

Flush sensor



	M12	M18
Steel	1	1
Aluminum	1	1
Brass	1.3	1.2
Copper	0.85	0.8
Thickness 1 mm	0.5	0.5
Thickness 2 mm	0.9	0.9

Flush mounted

Steel
Aluminum
Brass
Stainless steel

	M12	M18
Steel	0.7	0.75
Aluminum	1.15	0.9
Brass	1.05	0.75
Stainless steel	0.8	0.8

Flush mountable in metal



Lengths (mm):
a = Overall
b = To shoulder
c = Removal
d = Shoulder

Ø = 12
a = 55
b = 50
c = 9 (threaded end)
d = 15 hexagonal

Nominal sensing distance (Sn)	3 mm	3 mm	3 mm
-------------------------------	------	------	------

References


2-wire $\overline{\text{---}}$ (non polarised) Terminal connections	1-4	NO	XSLC1401393L1	XSLC1401393L3	XSLC1401393L4
Weight (kg)			0.050	0.065	0.050

Characteristics


Connection	Remote M12 connector on 1.2 m flying lead	Remote M12 connector on 0.8 m flying lead	Remote M12 connector on 0.15 m flying lead
Degree of protection conforming to IEC 60529	IP 67		
Operating zone	0...2.4 mm		
Repeat accuracy	≤ 3 % of Sr		
Differential travel	1...15 % of Sr		
Operating temperature	- 25...+ 80 °C		
Output state indication	Yellow LED, annular		
Rated supply voltage	$\overline{\text{---}}$ 12...48 V		
Voltage limits (including ripple)	$\overline{\text{---}}$ 10...58 V		
Switching capacity	1.5...100 mA with overload and short-circuit protection		
Voltage drop, closed state	≤ 4 V		
Residual current, open state	≤ 0.5 mA		
Current consumption, no-load	—		
Maximum switching frequency	800 Hz		
Delays	First-up: ≤ 5 ms; response: ≤ 05 ms; recovery: ≤ 0.5 ms		

Wiring schemes

2-wire $\overline{\text{---}}$, non polarised, NO output




Flush mountable in metal



$\varnothing = 18$
 $a = 40$
 $b = 35$
 $c = 0$ (PPS front face)
 $d = \varnothing 22$

Non flush mountable in metal



$\varnothing = 18$
 $a = 45$
 $b = 35$
 $c = 20$ (Teflon front face and case)
 $d = \varnothing 22$

6.3 mm

10 mm

10 mm

XSLC1401392L1

XSLC1401405L3

XSLC1401405L4

0.100

0.065

0.050

Remote M12 connector on
1.2 m flying lead

Remote M12 connector on
0.8 m flying lead

Remote M12 connector on
0.15 m flying lead

IP 67

0...5 mm

0...8 mm

3 % of Sr

1...15 % of Sr

-25...+70 °C

Yellow LED, annular

--- 12...48 V

--- 10...58 V

1.5...100 mA with overload and short-circuit protection

≤ 4 V

≤ 0.5 mA

—


100 Hz

First-up: ≤ 10 ms; response: ≤ 10 ms; recovery: ≤ 2 ms


Setting-up

Minimum mounting distances (mm)


Side by side




Face to face



Facing a metal object



Mounted in a metal support






XSLC	$\varnothing 12$ (flush mountable)	$e \geq 10$	$e \geq 60$	$e \geq 15$	$d = 12, h = 0$
	$\varnothing 18$ (non flush mountable)	$e \geq 16$	$e \geq 96$	$e \geq 24$	$d = 54, h = 16$

Inductive proximity sensors

OsiSense XS

Detection at fixed sensing distance. Factor 1 (Fe/Nfe)
sensors ⁽¹⁾ for ferrous and non ferrous materials
Solid-state output

Flush mountable in metal



Lengths (mm):

a = Overall

b = Threaded section

a = 60

b = 51.5

Ø = M18 x 1

a = 70

b = 51.5

Ø = M18 x 1

Nominal sensing distance (S_n)

Brass case

5 mm

Brass case

5 mm

References

4-wire --- PNP/PNP programmable
NO/NC

XS1M18KPM40

XS1M18KPM40D

Weight (kg)

0.120

0.060

Characteristics

Product certifications

CE, UL, CSA

Connection

Pre-cabled, PvR 4 x 0.34 mm², length 2 m ⁽²⁾

M12 connector

Degree of protection

Conforming to IEC 60529

IP 68

IP 67

Operating zone

0...4 mm

Repeat accuracy

3 % of S_r

Differential travel

1...15 % of S_r

Operating temperature

0...+50 °C

Output state indication

Yellow LED, annular

Yellow LED, 4 viewing ports at 90°

Rated supply voltage

--- 12...24 V with protection against reverse polarity

Voltage limits (including ripple)

--- 10...38 V

Switching capacity

0...200 mA with overload and short-circuit protection

Voltage drop, closed state

≤ 2.6 V

Current consumption, no-load

≤ 15 mA

Maximum switching frequency

1000 Hz

Delays

First-up

≤ 10 ms

Response

≤ 0.3 ms

Recovery

≤ 0.7 ms

Wiring schemes

M12 connector


Pre-cabled

4-wire ---, PNP/NPN, NO or NC output




BN: brown
BU: blue
BK: black
WH: white

PNP



NPN




⁽¹⁾ The variation in sensing distance between ferrous and non ferrous materials is typically less than 5 %.

⁽²⁾ Sensors available with other cable lengths: please consult our Customer Care Centre.

Inductive proximity sensors


OsiSense XS

Detection at fixed sensing distance. Factor 1 (Fe/Nfe)
sensors ⁽¹⁾ for ferrous and non ferrous materials
Solid-state output



a = 60
b = 51.5
Ø = M30 x 1.5

Stainless steel case
10 mm



a = 60
b = 51.5
Ø = M30 x 1.5

Stainless steel case
10 mm

References

XS1M30KPM40

0.205

XS1M30KPM40LD

0.145

Characteristics

CE, UL, CSA

Pre-cabled, PvR 4 x 0.34 mm², length 2 m ⁽²⁾

IP 68

0...8 mm

3 % of Sr

1...15 % of Sr

0...+ 50 °C

Yellow LED, annular

--- 12...24 V with protection against reverse polarity

--- 10...38 V

0...200 mA with overload and short-circuit protection

≤ 2.6 V

≤ 15 mA

1000 Hz

≤ 5 ms

≤ 0.3 ms

≤ 0.7 ms

M12 connector on 0.8 m flying lead

IP 67

Setting-up





Minimum mounting distances (mm)

Side by side

Face to face

Facing a metal object

Mounted in a metal support



XS1M18 flush mountable

$e \geq 10$

$e \geq 60$

$e \geq 15$

$d \geq 18, h \geq 0$

XS1M30 flush mountable

$e \geq 20$

$e \geq 120$

$e \geq 30$

$d \geq 30, h \geq 0$

Fixing nut tightening torque: XS1M18: < 35 N.m, XS1M30: < 100 N.m

⁽¹⁾ The variation in sensing distance between ferrous and non ferrous materials is typically less than 5 %.



⁽²⁾ Sensors available with other cable lengths: please consult our Customer Care Centre.

Inductive proximity sensors

OsiSense XS Application

Factor 1 sensors for ferrous or non ferrous material detection and welding applications. Plastic case, 40 x 40 mm front face. 5 position turret head

Sensor	Flush mountable in metal	
Dimensions	40 x 40 x 70 mm	40 x 40 x 117 mm



Nominal sensing distance (Sn)	20 mm
-------------------------------	-------

References

4-wire ☐	PNP NO+NC	XS9C2A1PCM12	XS9C4A1PCP20 (1)
	NPN NO+NC	XS9C2A1NCM12	XS9C4A1NCP20 (1)


XS9C4...P20 sensors are available with an ISO M20 cable entry and can be supplied with a Pg 13.5 (e.g. **XS9C4A1PCG13**) or a 1/2" NPT (e.g. **XS9C4A1PCN12**) cable entry: please consult our Customer Care Centre for more information.

Weight (kg)	0.110	0.220
-------------	-------	-------

Characteristics

Product certifications		UL, CSA, CE
Conformity to standards		IEC 60947-5-2
Connection		M12 connector (4-pin) Screw terminals, clamping capacity 4 x 1.5 mm² / 4 x 16 AWG
Operating zone		0...16 mm
Differential travel		3...15% of Sr
Repeat accuracy		< 3%
Immunity to magnetic fields		< 250 mTesla
Degree of protection	Conforming to IEC 60529 and DIN 40050	IP 65, IP 67 and IP 69K
	Storage	- 40...+ 85°C
Temperature	Operation (2)	- 25...+ 70°C
	Material	Case: PBT
Vibration resistance	Conforming to IEC 60068-2-6	25 gn, amplitude ± 2 mm (f = 10...55 Hz)
Shock resistance	Conforming to IEC 60068-2-27	50 gn for 11 ms
Indicators		Output state: yellow LED. Supply on: green LED
Rated supply voltage	4-wire ☐	☐ 12...24 V with protection against reverse polarity
Voltage limits (including ripple)	4-wire ☐	☐ 10...36 V
Current consumption, no-load	4-wire ☐	< 30 mA
Switching capacity	4-wire ☐	< 200 mA with protection against overload and short-circuit
Voltage drop, closed state	4-wire ☐	< 2 V
Maximum switching frequency	4-wire ☐	250 Hz
Delays	First-up	< 15 ms
	Response	< 2.5 ms
	Recovery	< 2.5 ms

Setting-up

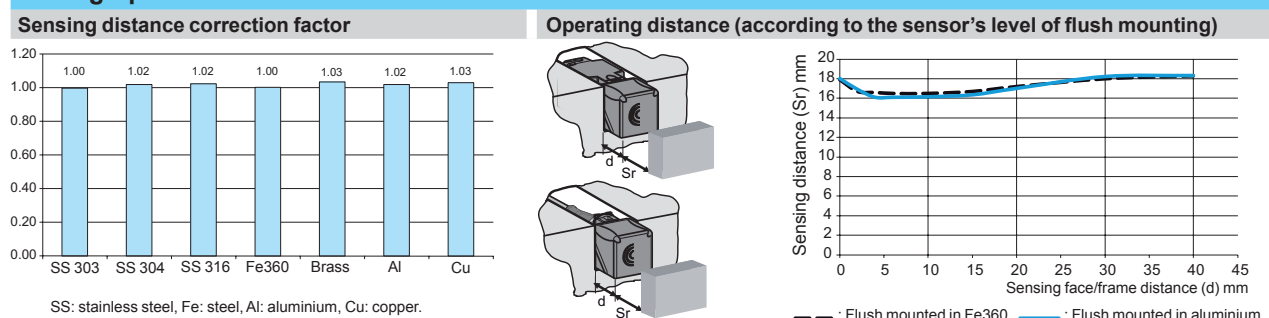

(1) These sensors are supplied without a cable gland. A suitable Pg 13.5 cable gland is available (reference **XSZPE13**).

(2) Sensors are available for very low temperatures (suffix **TF**: - 40°C, + 70°C) or very high temperatures (suffix **TT**: - 25°C, + 85°C); please consult our Customer Care Centre.



Inductive proximity sensors

OsiSense XS Application

Factor 1 sensors for ferrous or non ferrous material detection and welding applications. Plastic case, 40 x 40 mm front face. 5 position turret head

Setting-up (continued)

Minimum mounting distances (mm)

			
	Side by side	Face to face	Facing a metal object
Sensors flush mountable in metal	$e \geq 80$	$e \geq 200$	$e \geq 60$


Wiring schemes

M12 connector




- 1: + V
- 2: NC Output
- 3: 0 V
- 4: NO Output


4-wire ---, NO + NC outputs



Accessories



XSZPSC2




XSZPKC2

Description	Use for	Reference	Weight kg
Stainless steel rigid protective cover (only suitable for use when detecting from the top)	Welding	XSZPSC2	0.010
Protective sheet (for sensing face of sensor)	Welding	XSZPKC2	0.010

Sold in lots of 5


Dimensions

XS9C2A1PCM12 and XS9C2A1NCM12

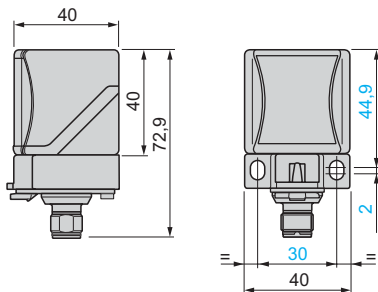


Head positions


XS9C2A1PCM12 and XS9C2A1NCM12

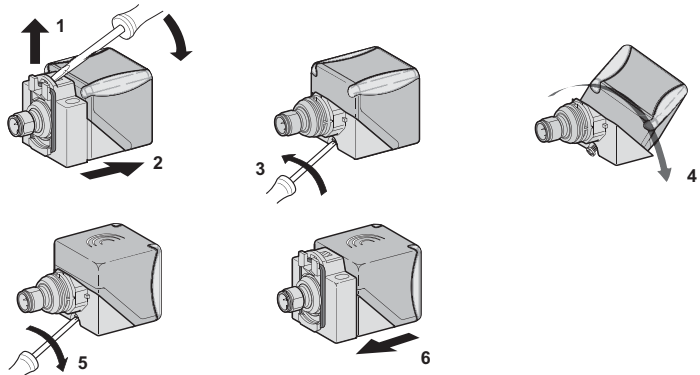

XS9C4A1PCP20 and XS9C4A1NCP20

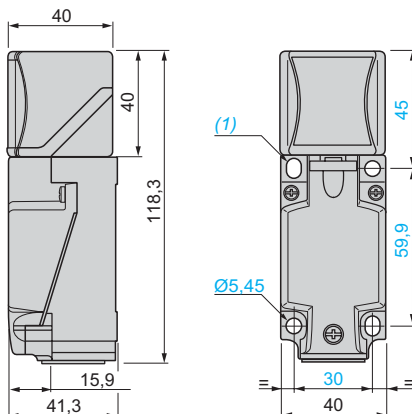

XS9C4A1PCP20 and XS9C4A1NCP20

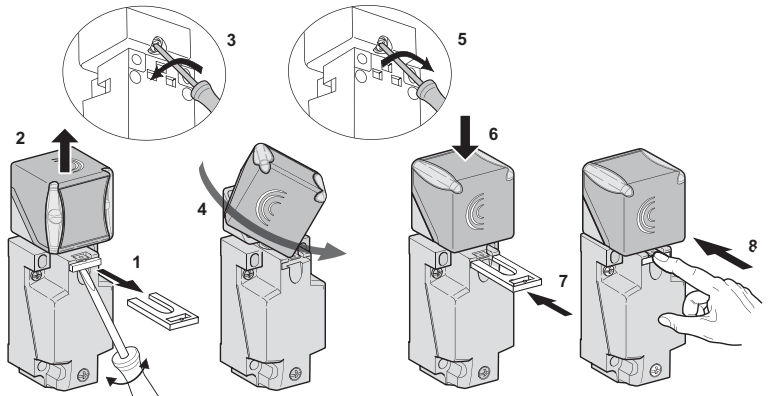

(1) 2 elongated holes $\varnothing 5.3 \times 7$ mm.

Tightening torque of cover fixing screws and clamp screws: < 1.2 N.m / < 10.62 lb-in.

Inductive proximity sensors

OsiSense XS Application


Selective detection of ferrous materials

Selective detection of non ferrous materials

Cylindrical type, solid-state output

Flush mountable

Stainless steel case



Nominal sensing distance (Sn)

5 mm

References

3-wire, ferrous version	PNP	NO	XS1M18PAS40
Insensitive to non ferrous materials			
3-wire, non ferrous version	PNP	NO	XS1M18PAS20
Insensitive to ferrous materials			
Weight (kg)	0.120		


Characteristics

Product certifications	UL, CSA, CE		
Connection	Pre-cabled, PvR, 3 x 0.34 mm ² , length 2 m (1)		
Operating zone	0...4 mm		
Degree of protection conforming to IEC 60529	IP 68		
Operating temperature	-25...+70 °C		
Output state indication	Yellow LED, annular		
Rated supply voltage	12...24 V with protection against reverse polarity		
Voltage limits (including ripple)	10...38 V		
Switching capacity	0...200 mA with overload and short-circuit protection		
Voltage drop, closed state	≤ 2.6 V		
Residual current, open state	—		
Current consumption, no-load	≤ 15 mA		
Maximum switching frequency	1000 Hz		
Delays	First-up	≤ 10 ms	
	Response	≤ 0.3 ms	
	Recovery	≤ 0.7 ms	

(1) Sensors available with other cable lengths: please consult our Customer Care Centre.


Wiring schemes

3-wire PNP



Dimensions


XS1M



a (mm)	b (mm)
60	51.5


Setting-up

Minimum mounting distances (mm)




Side by side

$e \geq 10$




Face to face

$e \geq 60$



Facing a metal object

$e \geq 15$



Mounted in a metal support

$d \geq 18$, $h \geq 0$ (ferrous metal)
 $d \geq 18$, $h \geq 5$ (non ferrous metal)

XS1M18

Inductive proximity sensors

OsiSense XS Application


Selective detection of ferrous materials

Selective detection of non ferrous materials

Cylindrical type, solid-state output

Flush mountable

Stainless steel case



Nominal sensing distance (Sn)

5 mm

References

3-wire, ferrous version	PNP	NO	XS1M18PAS40D
Insensitive to non ferrous materials			
3-wire, non ferrous version	PNP	NO	XS1M18PAS20D
Insensitive to ferrous materials			
Weight (kg)	0.060		


Characteristics

Product certifications	UL, CSA, CE		
Connection	M12 connector		
Degree of protection conforming to IEC 60529	IP 67		
Operating zone	0...4 mm		
Operating temperature	-25...+70 °C		
Output state indication	Yellow LED, 4 viewing ports at 90°		
Rated supply voltage	12...24 V with protection against reverse polarity		
Voltage limits (including ripple)	10...38 V		
Switching capacity	0...200 mA with overload and short-circuit protection		
Voltage drop, closed state	≤ 2.6 V		
Residual current, open state	—		
Current consumption, no-load	≤ 15 mA		
Maximum switching frequency	1000 Hz		
Delays	First-up	≤ 10 ms	
	Response	≤ 0.3 ms	
	Recovery	≤ 0.7 ms	

Wiring schemes


M12 connector

3-wire PNP



Dimensions


XS1M



a (mm)	b (mm)
70	51.5


Setting-up

Minimum mounting distances (mm)




Side by side

$e \geq 10$




Face to face

$e \geq 60$




Facing a metal object

$e \geq 15$




Mounted in a metal support


$d \geq 18$, $h \geq 0$ (ferrous metal)
 $d \geq 18$, $h \geq 5$ (non ferrous metal)




XSZB00




XSZB90




XSZBC10




XSZBE10




XSZBD10




XSZBPM12




XSZB100



XSZP100




XSZA00



XSCZ01



XSZF10



XTAZ30

Mounting and fixing accessories

Description	For use with sensor	Type	Diameter (mm)	Unit reference	Weight kg
"Clip" mounting plate Can be mounted without "clip" on threaded holes	XS●J	–	–	XSZBJ00	0.003
	XS●F	–	–	XSZBF00	0.005
	XS●E	–	–	XSZBE00	0.025
	XS●C	–	–	XSZBC00	0.060
"Clip" 90° mounting bracket Can be mounted without "clip" on threaded holes	XS●J	–	–	XSZBJ90	0.003
	XS●F	–	–	XSZBF90	0.005
	XS●E	–	–	XSZBE90	0.025
	XS●C	–	–	XSZBC90	0.060
Replacement bracket	XS●E	Replaces: XS7T2, XS8T2, XSE	–	XSZBE10	0.060
	XS●C	Replaces: XS7T4, XS7C40, XS8T4, XS8C40 and XSC	–	XSZBC10	0.110
	XS●D (for XSD) (1)	–	–	XSZBD10	0.065
Fixing clamp for remote control	XS9, XS6●●●B2	–	–	XSZBPM12	0.015
Fixing clamps	XS1	4 (plain)	–	XSZB104	0.005
		5 (M5 x 0.5)	–	XSZB105	0.005
	XS1, XS2	6.5 (plain)	–	XSZB165	0.005
	XS1, XS2, XS4, XS5, XS6	8 (M8 x 1)	–	XSZB108	0.006
	XS1, XS2, XS4, XS5, XS6, XT1	12 (M12 x 1)	–	XSZB112	0.006
		18 (M18 x 1)	–	XSZB118	0.010
		30 (M30 x 1.5)	–	XSZB130	0.020
	XT1	32 (plain)	–	XUZB32	0.050
	Set of 2 metal fixing nuts, nickel plated	XS1	5 (M5 x 0.5)	XSZE105	0.010
		XS1, XS2, XS5, XS6	8 (M8 x 1)	XSZE108	0.015
		XS1, XS2, XT1, XS5, XS6	12 (M12 x 1)	XSZE112	0.015
		18 (M18 x 1)	–	XSZE118	0.020
		30 (M30 x 1.5)	–	XSZE130	0.050
Set of 2 stainless steel fixing nuts	XS1, XS2, XS5, XS6	8 (M8 x 1)	–	XSZE308	0.015
	XS1, XS2, XT1, XS5, XS6	12 (M12 x 1)	–	XSZE312	0.015
		18 (M18 x 1)	–	XSZE318	0.020
		30 (M30 x 1.5)	–	XSZE330	0.050
	Set of 2 plastic fixing nuts	XS4	8 (M8 x 1)	XSZE208	0.002
		XS4	12 (M12 x 1)	XSZE212	0.003
			18 (M18 x 1)	XSZE218	0.004
			30 (M30 x 1.5)	XSZE230	0.005
Adaptor collar	Ø 20 XS●, XT●	18 (M18 x 1)	–	XSZA020	0.005
	Ø 34 XS●, XT●	30 (M30 x 1.5)	–	XSZA034	0.005

Protection accessories

Cable sleeve adaptor (CNOMO type)	XS●, XT●	12 (M12 x 1)	XSZP112	0.005
		18 (M18 x 1)	XSZP118	0.005
		30 (M30 x 1.5)	XSZP130	0.010
Outer cover (IP 68)	XT7, XS7, XS8 and XS9 – (C format)	–	XSCZ01	0.100
Thread adaptor	XS●, XT●	30 (M30 x 1.5)	XTAZ30	0.035
13P cable gland	Clamping capacity Ø 9 to 12 mm	–	XSZPE13	0.010
Protective cover	M12 universal connectors	–	XSZF10	0.020

Fixings


Threaded inserts for rear fixing	XS●E	M3	XSZVF03	0.002
	XS●C	M4	XSZVF04	0.005
	XS●D	M5	XSZVF05	0.006

Fuses (for unprotected 2-wire ~ sensors)


Description	Type	Sold in lots of	Unit reference	Weight kg
Cartridge fuses 5 x 20	0.4 A "quick-blow"	10	XUZE04	0.001
	0.63 A "quick-blow"	10	XUZE06	0.001
	0.8 A "quick-blow"	10	XUZE08	0.001
Fuse terminal block for XUZE0●	–	50	AB1FU10135U	0.040

(1) Depth adjustment shim for converting 80 x 80 x 26 mm format to 80 x 80 x 40 mm format. Also enables clipping onto 35 mm omega rail.


XSZBJ00




XSZBF00

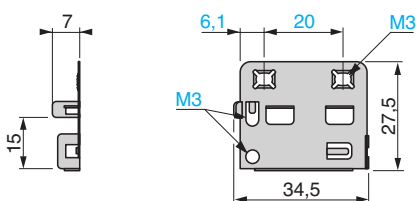

XSZBE00

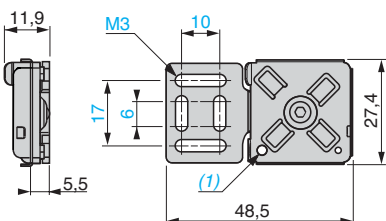


XSZBC00

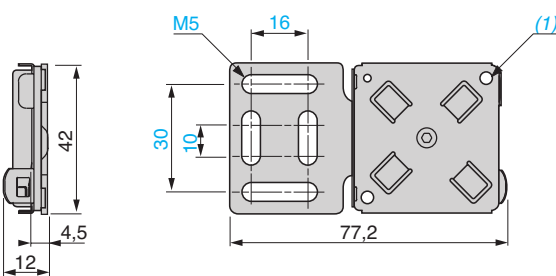


(1) 2 screws M3 x 12 (included).

(1) 4 screws M4 x 14 (included).


XSZBJ90

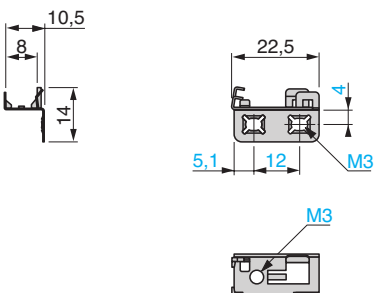


XSZBF90

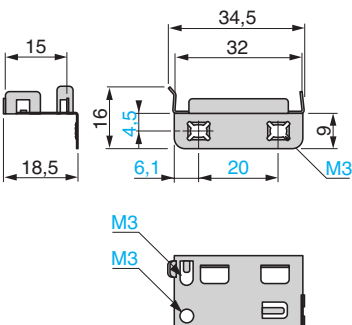

XSZBE90

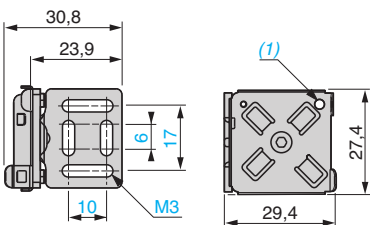


XSZBC90

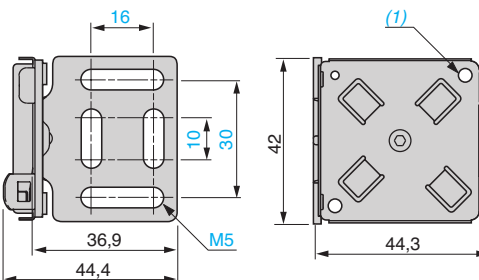


(1) 2 screws M3 x 12 (included).

(1) 4 screws M4 x 14 (included).


XSZBE10

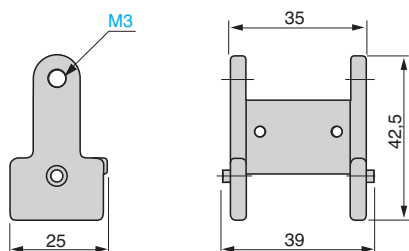


XSZBC10

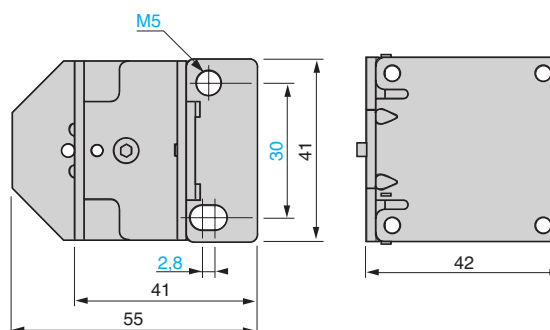


XSZBD10 (for mounting on XS•D•••••)

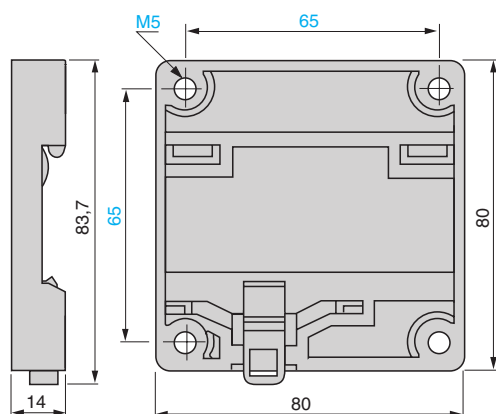


XSZBPM12



XSZB104, B105



XSZB108, B112, B118, B130, B165

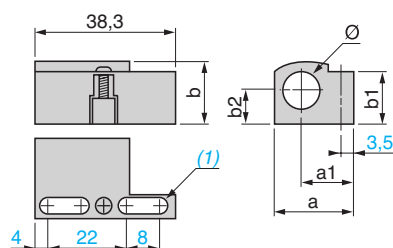


XSZ	a	a1	b	b1	b2	Ø
B108	19.9	14.5	14	12.5	7.5	8
B112	21.9	14.5	16	15.5	8.5	12
B118	26	15.7	22.3	20.1	11.5	18
B130	39	21.7	35.5	31	18.5	30
B165	19.9	14.5	14	12.5	7.5	6.5

(1) 2 elongated holes 4 x 8 mm.

XSZ	Ø
B104	4
B105	5

Note: for fixing clamps XSZB118 and XSZB130, see mounting precautions, page 3/19.

XUZB32

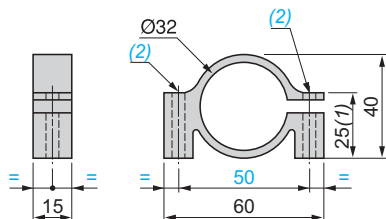


(1) Maximum value

(2) 2 holes Ø 5.5


2 x M5 screws, HM head, included with fixing clamp

XSZA0●●





XSZ	a	a1
A020	Ø18	Ø20
A034	Ø30	Ø34

XSZP112, P118, P130



XSZ	h	Ø d1	Ø d2
P112	7	12	16,8
P118	6,2	18	23
P130	6,2	30	34,4


XSCZ01

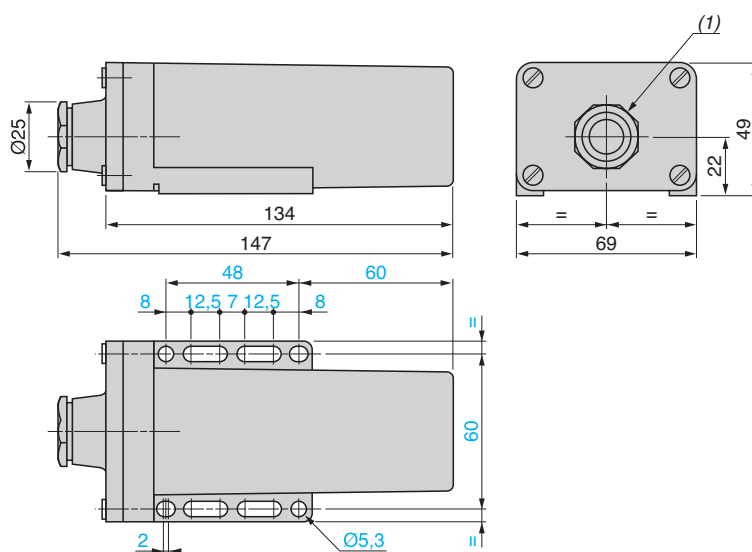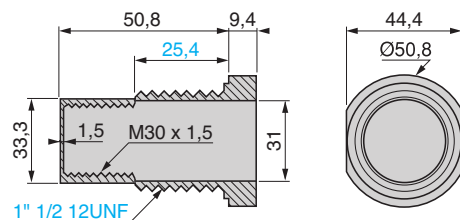**XTAZ30**

(1) 13P cable gland


Cylindrical type sensors

Flush mountable in metal

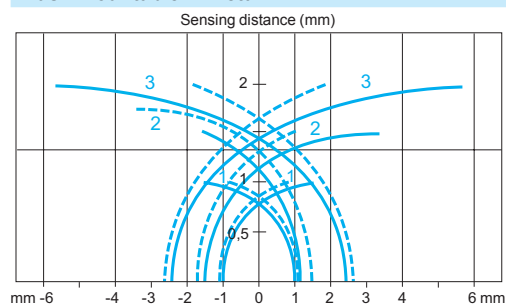

Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 4	5 x 5 x 1	0...0.8
Ø 5	5 x 5 x 1	0...0.8
Ø 6.5	8 x 8 x 1	0...1.2
Ø 8	8 x 8 x 1	0...1.2
Ø 12	12 x 12 x 1	0...1.6


— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 4 (plain) XS1 and Ø 5 (M5 x 0.5) XS1
 2 Ø 6.5 (plain) XS1 and Ø 8 (M8 x 1) XS5
 3 Ø 12 (M12 x 1) XS5

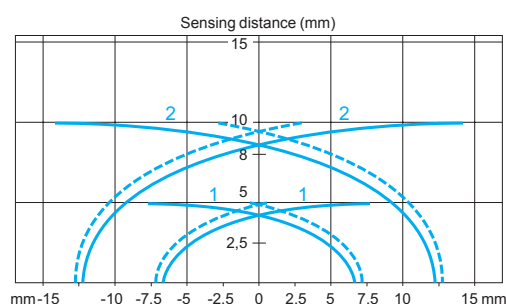

Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 18	18 x 18 x 1	0...4
Ø 30	30 x 30 x 1	0...8


— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 18 (M18 x 1) XS5
 2 Ø 30 (M30 x 1.5) XS5

Non flush mountable in metal

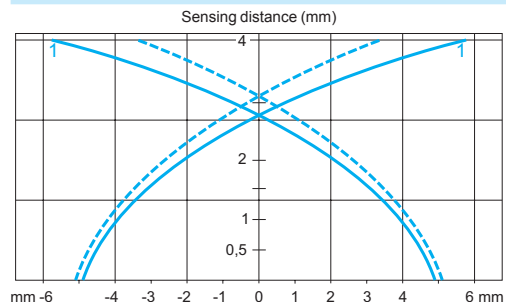

Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 12	12 x 12 x 1	0...3.2

— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 12 (M12 x 1) XS4




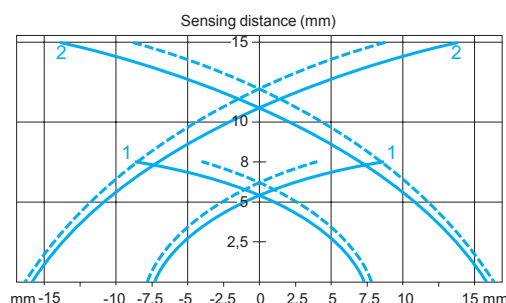


Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 18	24 x 24 x 1	0...6.4
Ø 30	45 x 45 x 1	0...12




— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 18 (M18 x 1) XS4
 2 Ø 30 (M30 x 1.5) XS4

Cylindrical type sensors, increased range

Flush mountable in metal

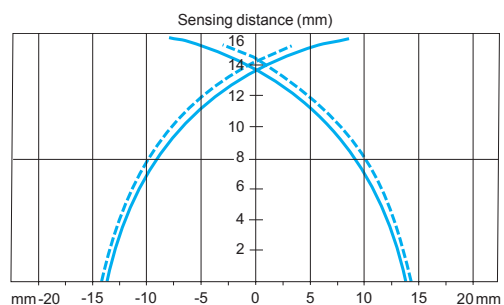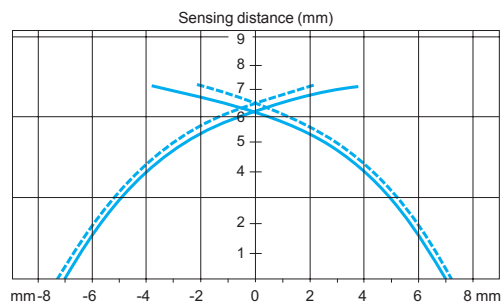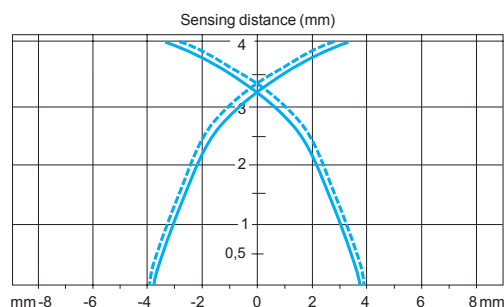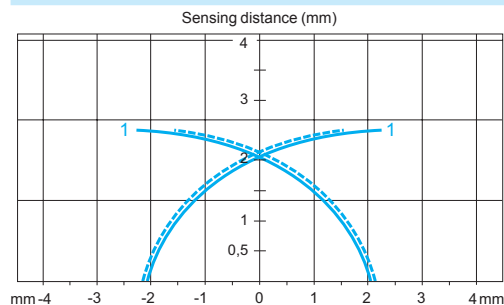

Non flush mountable in metal

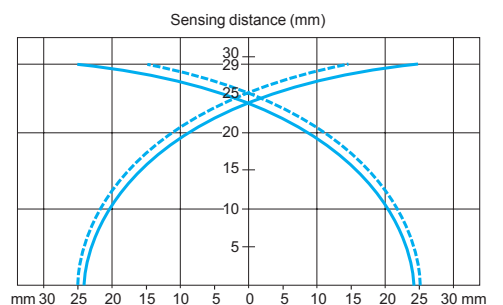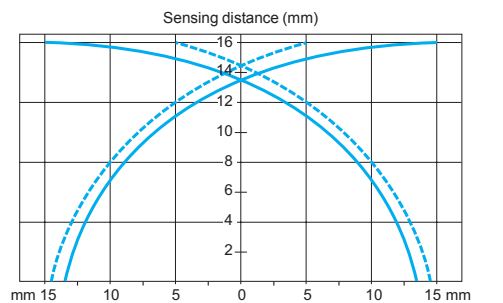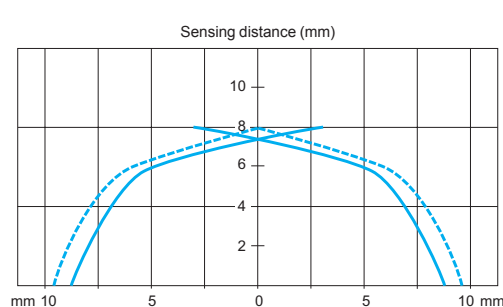

Sensor (mm)

Ø 6,5 and Ø 8

Standard steel target

(mm)

8 x 8 x 1

Operating zone (mm)

0...2 (flush mounted)

1 Ø 6.5 (plain) XS106B3●●
and Ø 8 (M8 x 1) XS108B3
and XS608●●

Sensor (mm)

Ø 12

Standard steel target

(mm)

12 x 12 x 1

Operating zone (mm)

0...3.2 (flush mounted)

0...6.4 (not flush mounted)

Sensor (mm)

Ø 18

Standard steel target

(mm)

24 x 24 x 1

Operating zone (mm)

0...6.4 (flush mounted)

0...12.8 (not flush mounted)

Sensor (mm)

Ø 30

Standard steel target

(mm)

45 x 45 x 1

Operating zone (mm)

0...12 (flush mounted)


0...24 (not flush mounted)

— pick-up points

- - - drop-out points (object approaching from the side)

Cylindrical type sensors

Flush mountable in metal

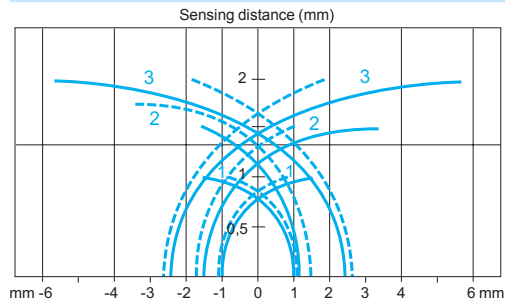


Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 4	5 x 5 x 1	0...0.8
Ø 5	5 x 5 x 1	0...0.8
Ø 6.5	8 x 8 x 1	0...1.2
Ø 8	8 x 8 x 1	0...1.2
Ø 12	12 x 12 x 1	0...1.6

— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 4 (plain) XS1 and Ø 5 (M5 x 0.5) XS1
 2 Ø 6.5 (plain) XS1 and Ø 8 (M8 x 1) XS5
 3 Ø 12 (M12 x 1) XS5

Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 18	18 x 18 x 1	0...4
Ø 30	30 x 30 x 1	0...8


— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 18 (M18 x 1) XS5
 2 Ø 30 (M30 x 1.5) XS5

Non flush mountable in metal

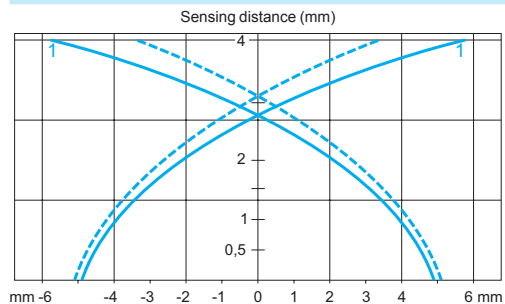

Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 12	12 x 12 x 1	0...3.2

— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 12 (M12 x 1) XS4




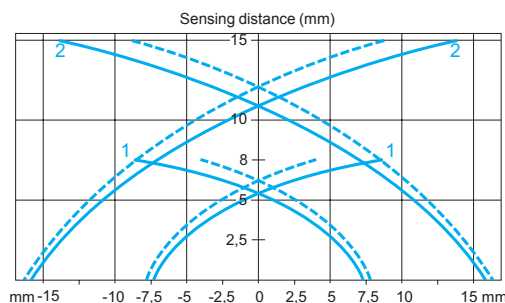


Sensor (mm)	Standard steel target (mm)	Operating zone (mm)
Ø 18	24 x 24 x 1	0...6.4
Ø 30	45 x 45 x 1	0...12




— pick-up points
 - - - drop-out points (object approaching from the side)
 1 Ø 18 (M18 x 1) XS4
 2 Ø 30 (M30 x 1.5) XS4

Cylindrical type sensors, increased range

Flush mountable in metal

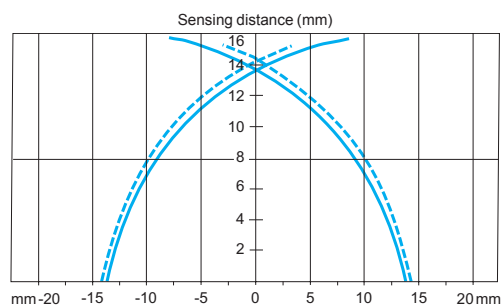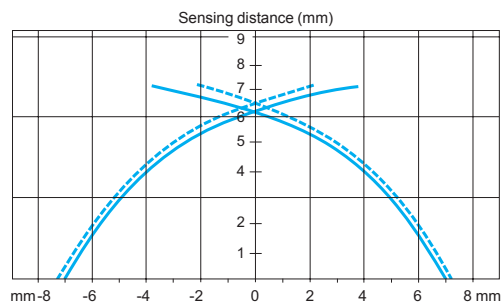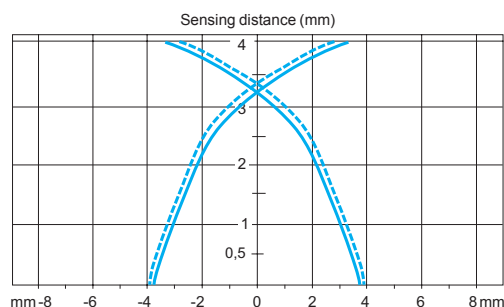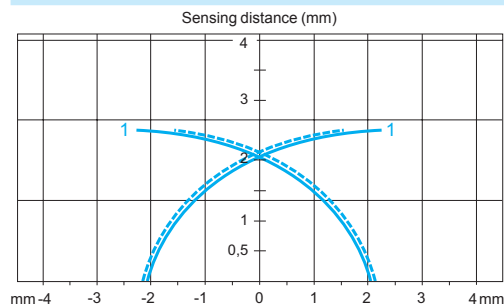

Non flush mountable in metal

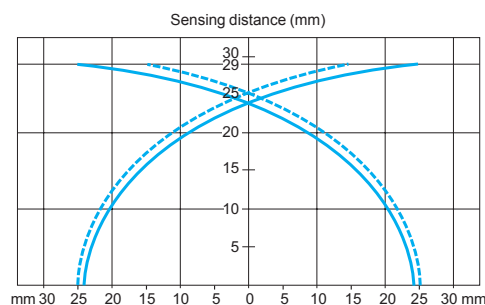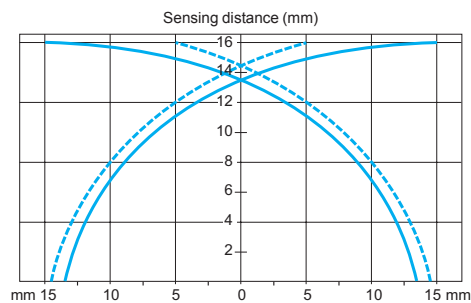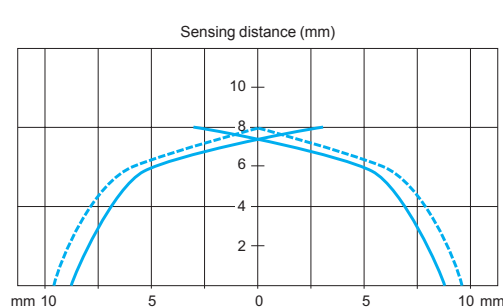

Sensor (mm)

Ø 6,5 and Ø 8

Standard steel target (mm)

8 x 8 x 1

Operating zone (mm)

0...2 (flush mounted)

1 Ø 6.5 (plain) XS106B3●●
and Ø 8 (M8 x 1) XS108B3
and XS608●●

Sensor (mm)

Ø 12

Standard steel target (mm)

12 x 12 x 1

Operating zone (mm)

0...3.2 (flush mounted)

0...6.4 (not flush mounted)

Sensor (mm)

Ø 18

Standard steel target (mm)

24 x 24 x 1

Operating zone (mm)

0...6.4 (flush mounted)

0...12.8 (not flush mounted)

Sensor (mm)

Ø 30

Standard steel target (mm)

45 x 45 x 1

Operating zone (mm)

0...12 (flush mounted)

0...24 (not flush mounted)

— pick-up points

- - - drop-out points (object approaching from the side)

- (1) For the new sensor an integral M12 connector replaces the remote M12 connector on a 0.80 m flying lead.
- (2) For the new sensor an M12 connector replaces the M8 connector.
- (3) For the new OsiSense XS sensor, the metal case replaces the plastic case.

Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor
Cylindrical type, DC		XS1M08NA370	XS508BLNAL2	XS1N08PB349L1	XS108B3PBL5
Diameter 6.5 mm		XS1M08NA370D	XS508BLNAM12	XS1N08PB349D	XS108B3PBM12
XS1		XS1M08NA370L1	XS508BLNAL5	XS1N08PB349S	XS108B3PBM8
XS1L06NA340	XS506B1NAL2	XS1M08NB370	XS508BLNBL2		
XS1L06NA340S	XS506B1NAM8	XS1M08NB370D	XS508BLNBM12		
XS1L06NB340	XS506B1NBL2	XS1M08PA370	XS508BLPAL2	XS2	
XS1L06NB340S	XS506B1NBM8	XS1M08PA370D	XS508BLPAM12	XS2M08NA340	XS608B1NAL2
XS1L06PA340	XS506B1PAL2	XS1M08PA370L1	XS508BLPAL5	XS2N08NA340	XS108B3NAL2
XS1L06PA340L1	XS506B1PAL5	XS1M08PA370L2	XS508BLPAL10	XS2N08NA340D	XS108B3NAM12
XS1L06PA340D	XS506B1PAM12	XS1M08PA370LD	XS508BLPAM12 (1)	XS2N08NA340L1	XS108B3NAL5
XS1L06PA340S	XS506B1PAM8	XS1M08PB370S	XS508BLPAM12 (2)	XS2N08NA340L2	XS108B3NAL10
XS1L06PB340	XS506B1PBL2	XS1M08PB370	XS508BLPBL2	XS2N08NA340S	XS108B3NAM8
XS1L06PB340L1	XS506B1PBL5	XS1M08PB370D	XS508BLPBM12	XS2N08NB340	XS108B3NBL2
XS1L06PB340S	XS506B1PBM8	XS1M08PB370L1	XS508BLPBL5	XS2N08NB340D	XS108B3NBM12
		XS1M08PB370L2	XS508BLPBL10	XS2N08NB340S	XS108B3NBM8
				XS2N08PA340	XS108B3PAL2
XS1L06NA349	XS106B3NAL2	XS1N08NA340	XS508B1NAL2	XS2N08PA340D	XS108B3PAM12
XS1L06NA349S	XS106B3NAM8	XS1N08NA340D	XS508B1NAM12	XS2N08PA340L1	XS108B3PAL5
XS1L06NB349	XS106B3NBL2	XS1N08NA340L1	XS508B1NAL5	XS2N08PA340L2	XS108B3PAL10
XS1L06NB349S	XS106B3NBM8	XS1N08NA340L2	XS508B1NAL10	XS2N08PA340S	XS108B3PAM8
XS1L06PA349	XS106B3PAL2	XS1N08NA340S	XS508B1NAM8	XS2N08PB340	XS108B3PBL2
XS1L06PA349L1	XS106B3PAL5	XS1N08NB340	XS508B1NBL2	XS2N08PB340D	XS108B3PBM12
XS1L06PA349D	XS106B3PAM12	XS1N08NB340D	XS508B1NBM12	XS2N08PB340S	XS108B3PBM8
XS1L06PA349S	XS106B3PAM8	XS1N08NB340S	XS508B1NBM8		
XS1L06PB349	XS106B3PBL2	XS1N08PA340	XS508B1PAL2	XS3	
XS1L06PB349L1	XS106B3PBL5	XS1N08PA340D	XS508B1PAM12	XS3P08NA340	XS508B1NAL2 (3)
XS1L06PB349S	XS106B3PBM8	XS1N08PA340L1	XS508B1PAL5	XS3P08NA340D	XS508B1NAM12 (3)
		XS1N08PA340L2	XS508B1PAL10	XS3P08NA340L1	XS508B1NAL5 (3)
Diameter 8 mm		XS1N08PA340LD	XS508B1PAM12	XS3P08PA340	XS508B1PAL2 (3)
XS1		XS1N08PA340S	XS508B1PAM8	XS3P08PA340D	XS508B1PAM12 (3)
XS1D08NA140	XS108BLNAL2	XS1N08PB340	XS508B1PBL2	XS3P08PA340L1	XS508B1PAL5 (3)
XS1D08NA140D	XS108BLNAM12	XS1N08PB340D	XS508B1PBM12		
XS1D08PA140	XS108BLPAL2	XS1N08PB340L1	XS508B1PBL5		
XS1D08PA140D	XS108BLPAM12	XS1N08PB340L2	XS508B1PBL10	XS3P08NA370	XS508BLNAL2 (3)
XS1D08PA140L1	XS108BLPAL5	XS1N08PB340S	XS508B1PBM8	XS3P08NA370L1	XS508BLNAL5 (3)
				XS3P08PA370	XS508BLPAL2 (3)
				XS3P08PA370L1	XS508BLPAL5 (3)
XS1M08DA210	XS508B1DAL2	XS1N08NA349	XS108B3NAL2		
XS1M08DA210D	XS508B1DAM12	XS1N08NA349L1	XS108B3NAL5		
XS1M08DA210L1	XS508B1DAL5	XS1N08NA349D	XS108B3NAM12		
XS1M08DA210L2	XS508B1DAL10	XS1N08NA349S	XS108B3NAM8		
XS1M08DA210LD	XS508B1DAL08M12	XS1N08NB349	XS108B3NBL2		
XS1M08DB210	XS508B1DBL2	XS1N08NB349L1	XS108B3NBL5		
XS1M08DB210D	XS508B1DBM12	XS1N08NB349D	XS108B3NBM12		
XS1M08DB210L1	XS508B1DBL5	XS1N08NB349S	XS108B3NBM8		
XS1M08DB210LD	XS508B1DBM12 (1)	XS1N08PA349	XS108B3PAL2		
		XS1N08PA349L1	XS108B3PAL5		
		XS1N08PA349D	XS108B3PAM12		
XS1M08DA214D	XS508B1CAM12	XS1N08PA349S	XS108B3PAM8		
XS1M08DA214LD	XS508B1CAL08M12	XS1N08PB349	XS108B3PBL2		

Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor
Cylindrical type, DC (continued)					
Diameter 12 mm					
XS1					
XS1M12DA210	XS512B1DAL2	XS1N12PA340S	XS512B1PAM12 (2)	XS2N12PC410D	XS112B3PCM12
XS1M12DA210D	XS512B1DAM12	XS1N12PB340	XS512B1PBL2	XS2N12PC410L1	XS112B3PCM12 + XZCPV1141L5
XS1M12DA210L1	XS512B1DAL5	XS1N12PB340D	XS512B1PBM12	XS2N12PC410L2	XS112B3PCM12 + XZCPV1141L10
XS1M12DA210L2	XS512B1DAL10	XS1N12PB340L1	XS512B1PBL5	XS2N12PB340	XS112B3PBL2
XS1M12DA210LA	XS512B1DAL08U78			XS2N12PB340D	XS112B3PBM12
XS1M12DA210LD	XS512B1DAL08M12	XS1M12PA349D	XS612B1PAM12	XS2N12PB340L1	XS112B3PBL5
XS1M12DB210	XS512B1DBL2	XS1N12NA349	XS112B3NAL2		
XS1M12DB210D	XS512B1DBM12	XS1N12NA349L1	XS112B3NAL5		
XS1M12DB210L1	XS512B1DBL5	XS1N12NA349D	XS112B3NAM12	XS3	
XS1M12DB210L2	XS512B1DBL10	XS1N12NB349	XS112B3NBL2	XS3P12NA340	XS512B1NAL2 (3)
XS1M12DB210LD	XS512B1DBL08M12	XS1N12NB349L1	XS112B3NBL5	XS3P12NA340D	XS512B1NAM12 (3)
		XS1N12NB349D	XS112B3NBM12	XS3P12NA340L1	XS512B1NAL5 (3)
		XS1N12PA349	XS112B3PAL2	XS3P12PA340	XS512B1PAL2 (3)
		XS1N12PA349L1	XS112B3PAL5	XS3P12PA340D	XS512B1PAM12 (3)
		XS1N12PA349D	XS112B3PAM12	XS3P12PA340L1	XS512B1PAL5 (3)
XS1M12DA214D	XS512B1CAM12	XS1N12PB349	XS112B3PBL2		
XS1M12DA214LD	XS512B1CAL08M12	XS1N12PB349L1	XS112B3PBL5		
		XS1N12PB349D	XS112B3PBM12		
				XS3P12NA370	XS512BLNAL2 (3)
XS1M12NA370	XS512BLNAL2			XS3P12NA370L1	XS512BLNAL5 (3)
XS1M12NA370D	XS512BLNAM12	XS2		XS3P12PA370	XS512BLPAL2 (3)
XS1M12NA370L1	XS512BLNAL5	XS2M12NA370	XS612B1NAL2	XS3P12PA370L1	XS512BLPAL5 (3)
XS1M12NA370L2	XS512BLNAL10	XS2M12NA370D	XS612B1NAM12		
XS1M12NA370S	XS612B1NAM12 (2)	XS2M12NA370L1	XS612B1NAL5		
XS1M12NB370	XS512BLNBL2	XS2M12NA370L2	XS612B1NAL10	XS4	
XS1M12NB370D	XS512BLNBM12	XS2M12NB370	XS612B1NBL2	XS4P12PC410L2	XS4P12PC410D + XZCPV1141L10
XS1M12NB370D	XS512BLNBM12	XS2M12NB370D	XS612B1NBM12		
XS1M12PA370	XS512BLPAL2	XS2M12PA370	XS612B1PAL2		
XS1M12PA370D	XS512BLPAL5	XS2M12PA370D	XS612B1PAL5		
XS1M12PA370L1	XS512BLPAL10	XS2M12PA370L1	XS612B1PAM12		
XS1M12PA370L2	XS512BLPAL10	XS2M12PA370L2	XS612B1PAL10		
XS1M12PA370LA	XS612B1PAL08U78	XS2M12PA370LA	XS612B1PAL08U78		
XS1M12PA370LD	XS612B1PAL08M12	XS2M12PA370LD	XS612B1PAL08M12		
XS1M12PB370	XS512BLPBL2	XS2M12PB370	XS612B1PBL2		
XS1M12PB370D	XS512BLPBM12	XS2M12PB370D	XS612B1PBM12		
XS1M12PB370L1	XS512BLPBL5	XS2M12PB370L1	XS612B1PBL5		
XS1M12PB370L2	XS512BLPBL10	XS2M12PB370S	XS612B1PBM12 (2)		
XS1M12PB370LD	XS612B1PAM12 (1)				
XS1N12NA340	XS512B1NAL2	XS2N12NA340	XS112B3NAL2		
XS1N12NA340D	XS512B1NAM12	XS2N12NA340D	XS112B3NAM12		
XS1N12NA340L1	XS512B1NAL5	XS2N12NA340L1	XS112B3NAL5		
XS1N12NA340L2	XS512B1NAL10	XS2N12NA340L2	XS112B3NAL10		
XS1N12NB340	XS512B1NBL2	XS2N12NB340	XS112B3NBL2		
XS1N12NB340D	XS512B1NBM12	XS2N12NB340D	XS112B3NBM12		
XS1N12NC410L2	XS1N12NC410D + XZCPV1141L10	XS2N12NC410L1	XS2N12NC410D + XZCPV1141L5		
XS1N12PA340	XS512B1PAL2	XS2N12PA340	XS112B3PAL2		
XS1N12PA340D	XS512B1PAM12	XS2N12PA340D	XS112B3PAM12		
XS1N12PA340L1	XS512B1PAL5	XS2N12PA340L1	XS112B3PAL5		
XS1N12PA340L2	XS512B1PAL10	XS2N12PA340L2	XS112B3PAL10		
XS1N12PA340LD	XS512B1PAM12 (1)	XS2N12PC410	XS112B3PCL2		

(1) For the new sensor an integral M12 connector replaces the remote M12 connector on a 0.80 m flying lead.

(2) For the new sensor an M12 connector replaces the M8 connector.

(3) For the new OsiSense XS sensor, the metal case replaces the plastic case.

- (1) For the new sensor an integral M12 connector replaces the remote M12 connector on a 0.80 m flying lead.
- (3) For the new OsiSense XS sensor, the metal case replaces the plastic case.
- (4) For the new sensor, connectors A, B, C and G on 0.1 m flying lead replace integral connectors A, B, C and G.

3
Telemecanique
Sensors

Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor
Cylindrical type, AC or DC		Diameter 18 mm (continued)		Diameter 30 mm (continued)	
Diameter 12 mm		XS1		XS1M30MB230C	
XS1		XS1M18MA239A		XS1M30MB230G	
XS1M12MA230	XS512B1MAL2	XS1M18MA239K	XS618B1MAU20 (5)	XS1M30MB230K	XS530B1MBU20
XS1M12MA230K	XS512B1MAU20	XS2		XS1M30MB230L1	XS530B1MBL5
XS1M12MA230L1	XS512B1MAL5	XS2M18MA230		XS1M30MB230L2	XS530B1MBL10
XS1M12MA230L2	XS512B1MAL10	XS2M18MA230A		XS1M30MA239	
XS1M12MB230	XS512B1MBL2	XS2M18MA230B		XS1M30MA239A	
XS1M12MB230K	XS512B1MBU20	XS2M18MA230C		XS2M18MA230A	
XS1M12MB230L1	XS512B1MBL5	XS2M18MA230G		XS2M18MA230B	
XS1M12MB230L2	XS512B1MBL10	XS2M18MA230K		XS2M18MA230C	
XS612B1MAL2		XS2M18MA230L1		XS2M18MA230G	
XS612B1MAU20		XS2M18MA230L2		XS2M18MA230K	
XS2		XS2M18MB230		XS2M18MA230L1	
XS2M12MA230	XS612B1MAL2	XS2M18MB230A		XS2M18MA230L2	
XS2M12MA230K	XS612B1MAU20	XS2M18MB230B		XS2M18MB230	
XS2M12MA230L1	XS612B1MAL5	XS2M18MB230C		XS2M18MB230K	
XS2M12MA230L2	XS612B1MAL10	XS2M18MB230G		XS2M12MB230	
XS2M12MB230	XS612B1MBL2	XS2M18MB230K		XS2M12MB230K	
XS2M12MB230K	XS612B1MBU20	XS2M18MB230L1		XS2M12MB230L1	
XS2M12MB230L1	XS612B1MBL5	XS2M18MB230L2		XS2M12MB230L2	
XS2M12MB230L2	XS612B1MBL10	XS3		XS2M30MA230A	
XS3		XS3P18MA230		XS2M30MA230B	
XS3P12MA230	XS612B1MAL2 (3)	XS3P18MA230K		XS2M30MA230C	
XS3P12MA230K	XS612B1MAU20 (3)	XS3P18MA230L1		XS2M30MA230G	
XS3P12MA230L1	XS612B1MAL5 (3)	XS3P18MA230L2		XS2M30MA230K	
XS3P12MA230L2	XS612B1MAL10 (3)	XS3P18MB230		XS2M30MA230L1	
XS3P12MB230	XS612B1MBL2 (3)	XS3P18MB230A		XS2M30MA230L2	
XS3P12MB230K	XS612B1MBU20 (3)	XS3P18MB230K		XS2M30MB230	
XS3P12MB230L1	XS612B1MBL5 (3)	XS3P18MB230L1		XS2M30MB230A	
Diameter 18 mm		XS4		XS2M30MB230B	
XS1		XS4P18MA230B		XS2M30MB230C	
XS1M18MA230	XS518B1MAL2	XS4P18MA230C		XS2M30MB230G	
XS1M18MA230A	XS618B1MAL01U78 (4)	XS4P18MA230G		XS2M30MB230K	
XS1M18MA230B	XS618B1MAL01B (4)	XS4P18MB230B		XS2M30MB230L1	
XS1M18MA230C	XS618B1MAL01C (4)	XS4P18MB230C		XS3	
XS1M18MA230G	XS618B1MAL01G (4)	Diameter 30 mm		XS3P30MA230	
XS1M18MA230K	XS518B1MAU20	XS1		XS3P30MA230K	
XS1M18MA230L1	XS518B1MAL5	XS1M30MA230		XS3P30MA230L1	
XS1M18MA230L2	XS518B1MAL10	XS1M30MA230A		XS3P30MA230L2	
XS1M18MB230	XS518B1MBL2	XS1M30MA230B		XS3P30MB230	
XS1M18MB230A	XS618B1MBL01U78 (4)	XS1M30MA230C		XS3P30MB230L1	
XS1M18MB230B	XS618B1MBL01B (4)	XS1M30MA230G		XS4	
XS1M18MB230C	XS618B1MBL01C (4)	XS1M30MA230K		XS4P30MA230B	
XS1M18MB230G	XS618B1MBL01G (4)	XS1M30MA230L1		XS4P30MA230C	
XS1M18MB230K	XS518B1MBU20	XS1M30MA230L2		XS4P30MA230G	
XS1M18MB230L1	XS518B1MBL5	XS1M30MB230		XS4P30MB230B	
XS1M18MB230L2	XS518B1MBL10	XS1M30MB230A		XS4P30MB230C	
XS1M18MA239	XS618B1MAL2 (5)	XS1M30MB230B			

(3) For the new OsiSense XS sensor, the metal case replaces the plastic case.

(4) For the new sensor, connectors A, B, C and G on 0.1 m flying lead replace integral connectors A, B, C and G.

(5) For the new sensor, Sn = 8 mm instead of 10 mm.

Old sensor	New OsiSense XS sensor	Old sensor	New OsiSense XS sensor
Block type		40 x 40 x 70 mm and 40 x 40 x 117 mm (continued)	
40 x 40 x 70 mm and 40 x 40 x 117 mm		XS8	
XS7		XS8C40DA210	XS8C4A1DPG13
XS7C40DA210	XS7C4A1DPG13	XS8C40DA210H29	XS8C4A1DPP20
XS7C40DA210A	XS7C4A1DPU78	XS8C40DA214D	XS8C4A1DPM12
XS7C40DA210D	XS7C4A1DPM12	XS8C40DP210	XS8C4A1DPG13
XS7C40DA210H29	XS7C4A1DPP20	XS8C40DP210H29	XS8C4A1DPP20
XS7C40DA210H7	XS7C4A1DPN12	XS8C40DP210H7	XS8C4A1DPN12
XS7C40DA214D	XS7C4A1DPM12	XS8C40FP260	XS8C4A1MPG13
XS7C40DP210	XS7C4A1DPG13	XS8C40FP260H29	XS8C4A1MPP20
XS7C40DP210H29	XS7C4A1DPP20	XS8C40FP260H7	XS8C4A1MPN12
XS7C40DP210H7	XS7C4A1DPN12	XS8C40MP230	XS8C4A1MPG13
XS7C40FP260	XS7C4A1MPG13	XS8C40MP230H29	XS8C4A1MPP20
XS7C40FP260A	XS7C4A1MPU78	XS8C40MP230H7	XS8C4A1MPN12
XS7C40FP260H29	XS7C4A1MPP20	XS8C40NC440	XS8C4A1NCG13
XS7C40FP260H7	XS7C4A1MPN12	XS8C40NC440H29	XS8C4A1NCP20
XS7C40KPM40	XS9C4A1PCG13	XS8C40NC449	XS8C4A4NCG13
XS7C40KPM40H29	XS9C4A1PCP20	XS8C40NC449H29	XS8C4A4NCP20
XS7C40KPM40H7	XS9C4A1PCN12	XS8C40NC449H7	XS8C4A4NCN12
XS7C40MP230	XS7C4A1MPG13	XS8C40PC440	XS8C4A1PCG13
XS7C40MP230A	XS7C4A1MPU78	XS8C40PC440D	XS8C4A1PCM12
XS7C40MP230H29	XS7C4A1MPP20	XS8C40PC440H29	XS8C4A1PCP20
XS7C40MP230H7	XS7C4A1MPN12	XS8C40PC440H7	XS8C4A1PCN12
XS7C40NC440	XS8C4A1NCG13	XS8C40PC449	XS8C4A4PCG13
XS7C40NC440D	XS8C4A1NCM12	XS8C40PC449D	XS8C4A4PCM12
XS7C40NC440H29	XS8C4A1NCP20	XS8C40PC449H29	XS8C4A4PCP20
XS7C40NC440H7	XS8C4A1NCN12	XS8C40PC449H7	XS8C4A4PCN12
XS7C40NC449	XS8C4A1NCG13	XS8T4NC440	XS8C2A1NCM12 + XZCP1141L2
XS7C40NC449H29	XS8C4A1NCP20	XS8T4NC440LD01	XS8C2A1NCM12
XS7C40NC449H7	XS8C4A1NCN12	XS8T4PC440	XS8C2A1PCM12 + XZCP1141L2
XS7C40PC440	XS8C4A1PCG13	XS8T4PC440L1	XS8C2A1PCM12 + XZCP1141L5
XS7C40PC440D	XS8C4A1PCM12	XS8T4PC440L2	XS8C2A1PCM12 + XZCP1141L10
XS7C40PC440H29	XS8C4A1PCP20	XS8T4PC440LD	XS8C2A1PCM12
XS7C40PC440H7	XS8C4A1PCN12	XS8T4PC440LD01	XS8C2A1PCM12
XS7C40PC449	XS8C4A1PCG13	40 x 40 x 117 mm	
XS7C40PC449D	XS8C4A1PCM12	XSCH	
XS7C40PC449H29	XS8C4A1PCP20	XSCH203629	XS9C4A2A2G13
XS7C40PC449H7	XS8C4A1PCN12	XSCH203629H7	XS9C4A2A2N12
XS7T4DA210	XS7C2A1DAM12 + XZCP1141L2	XSCH207629	XS9C4A2A1G13
XS7T4DA214LD	XS8C2A1CAM12	XSCH207629H7	XS9C4A2A1N12
XS7T4DA214LD01	XS8C2A1CAM12		
XS7T4DA214LD01W	XS8C2A1CAM12 + XSZPKC2		
XS7T4DA214LDW	XS8C2A1CAM12 + XSZPKC2		
XS7T4NC440	XS8C2A1NCM12 + XZCP1141L2		
XS7T4NC440LD	XS8C2A1NCM12		
XS7T4NC440LD01	XS8C2A1NCM12		
XS7T4PC440	XS8C2A1PCM12 + XZCP1141L2		
XS7T4PC440LD	XS8C2A1PCM12		